Ecco Surface Mount

Assembly Guide



Thank you for choosing In Common With. Please confirm that you received all of the components pictured in this guide, and reach out to us if anything is missing. It's rare, but it happens. We hope you enjoy your fixture. With proper care, it should last a lifetime.


Have questions? Please contact us at support@incommonwith.com.




CAUTION!
Electrical shock risk. Turn off electrical power at the main fuse box or circuit panel before beginning installation, servicing the light, or installing accessories. We recommend working with a qualified electrician familiar with the type of work you'd like done.

ATTENTION!
Risque de choc électrique. Coupez l'alimentation électrique au niveau de la boîte à fusibles principale ou du panneau de circuits avant de commencer l'installation, l'entretien de la lumière ou l'installation d'accessoires. Nous vous recommandons de travailler avec un électricien qualifié familier avec le type de travail que vous souhaitez effectuer.


Ecco Surface Mount, Medium
Components

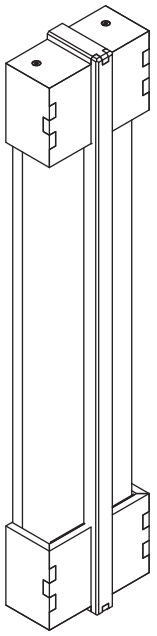

Ecco Surface Mount, Medium Assembly



Backplate




LED Board



Socket Head Screws (x4)




Canopy Screws (x4)




Hardware Pack

Step 1

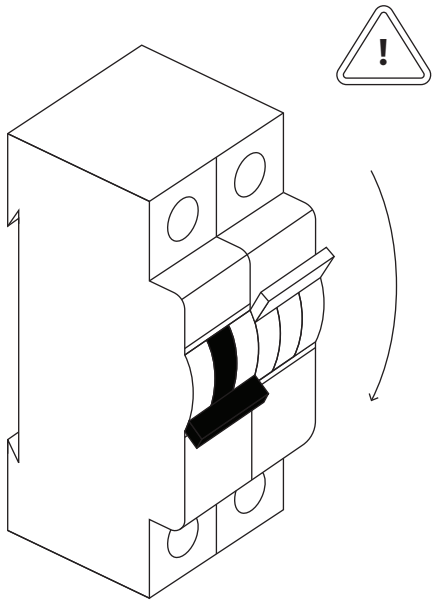

Before beginning installation, turn off electrical power at the main fuse box or circuit panel.

Step 2

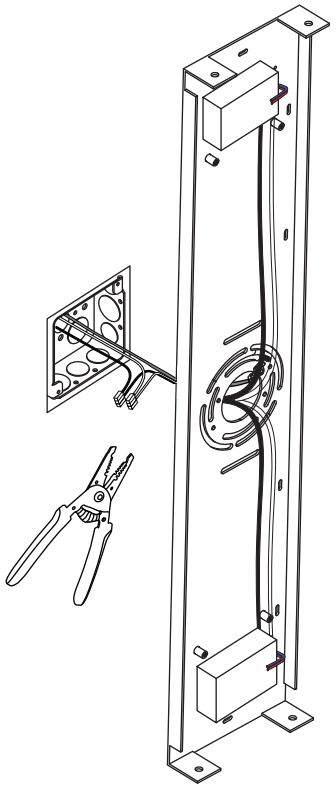


Use only with Class 2 Power Unit with output DC24V constant voltage.
Connect the junction box wires to the Class 2 Power Unit with Wago clips:

White → Neutral
Black → Live

For 0-10V Dimming: Connect pink and purple wires to the same colors dimming system. For TRIAC or ELV Dimming: Cap the pink and purple wires with Wago clips. If needed, strip 3/8” of insulation from each wire before connecting.


Step 3

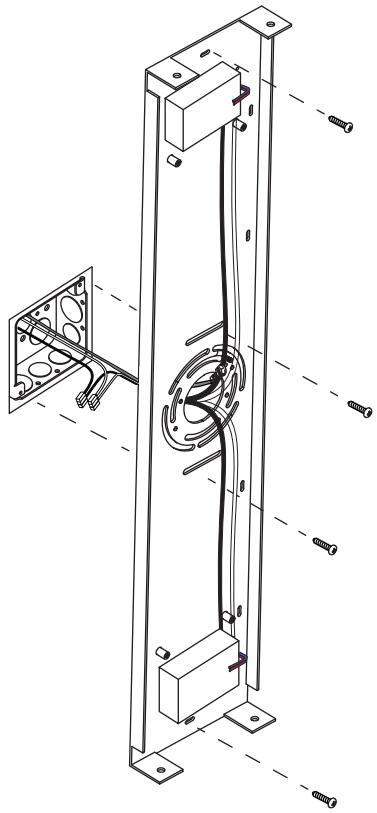

Mount the backplate to the junction box using a Phillips head screwdriver to tighten the mounting screws. For additional support, mount the backplate to the wall using anchors appropriate for your wall material.

Make sure blue and red leads are accessible.


Step 4

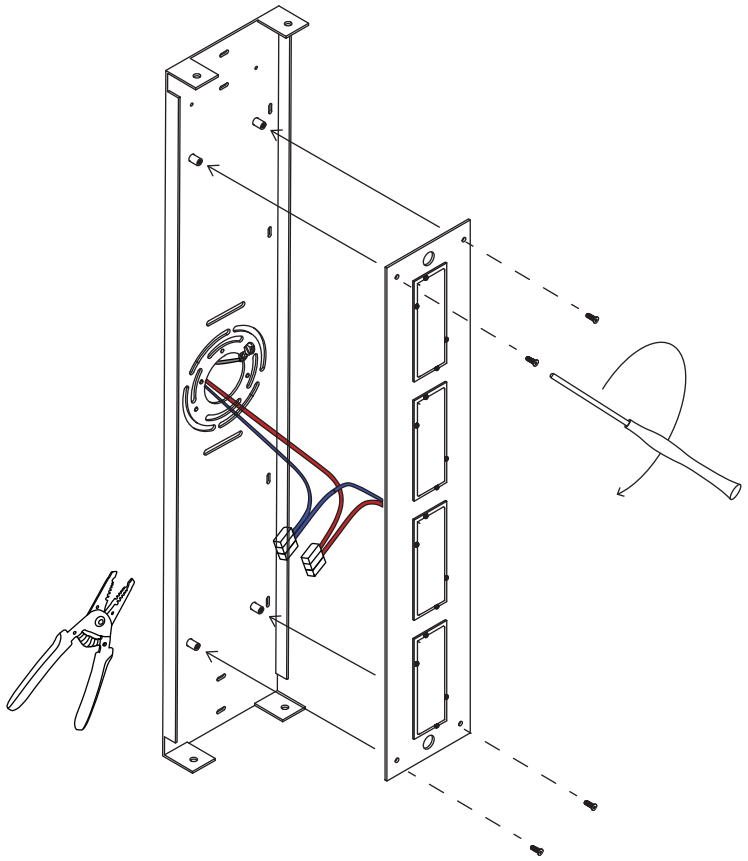

Connect the blue and red wires from the driver to the blue and red wires on the LED light source located on LED board. If needed, use a wire stripper to remove 3/8” insulation from each wire before inserting them into the corresponding wago clip.


Align holes on LED board with threaded standoffs on backplate. Secure board with screwdriver found in hardware pack.

Step 5

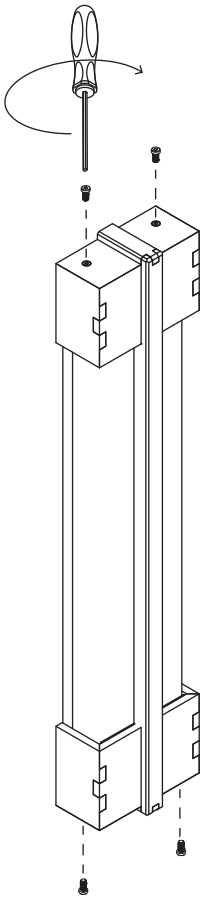


Align the holes of the backplate with the holes of the Ecco Surface Mount Assembly. Secure the assembly in place with the canopy screws and screwdriver found in the hardware pack.

Step 6

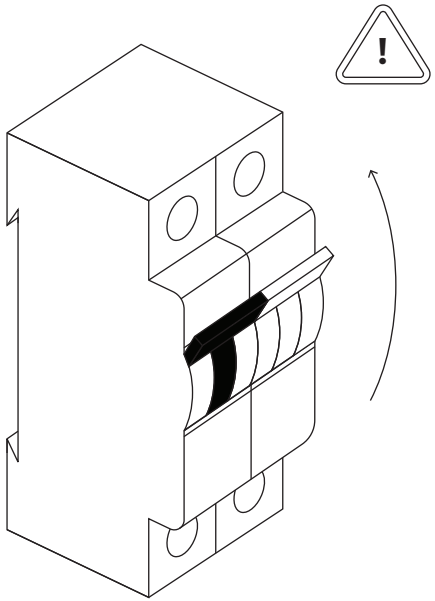

Turn the power back on at the main fuse box or circuit panel you disabled before installation. Turn on the light :)

Ecco Surface Mount, Large
Components

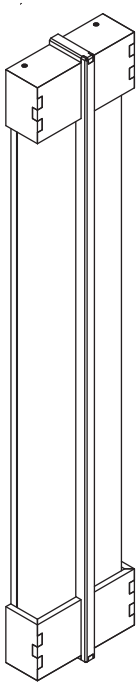

Ecco Surface Mount, Large Assembly



Backplate




LED Board




Socket Head Screws (x4)



Canopy Screws (x4)




Dimmable LED Driver




Hardware Pack

Step 1

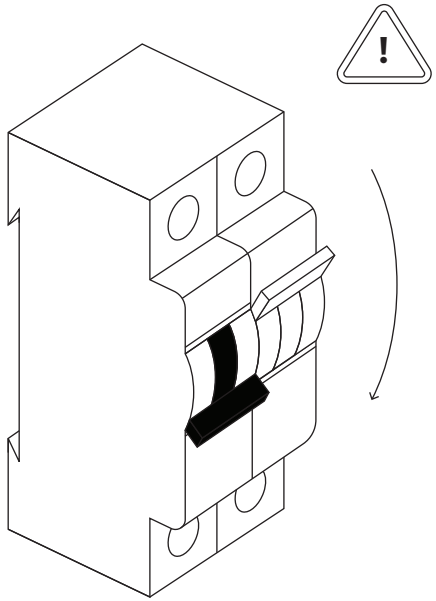

Before beginning installation, turn off electrical power at the main fuse box or circuit panel.

Step 2

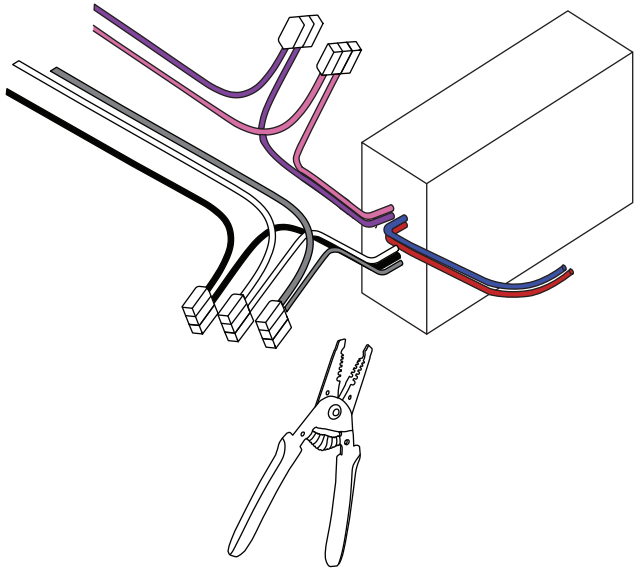


Use only with Class 2 Power Unit with output DC24V constant voltage.
Connect the junction box wires to the Class 2 Power Unit with Wago clips:

White → Neutral
Black → Live

For 0-10V Dimming: Connect pink and purple wires to the same colors dimming system. For TRIAC or ELV Dimming: Cap the pink and purple wires with Wago clips. If needed, strip 3/8” of insulation from each wire before connecting.


Step 3

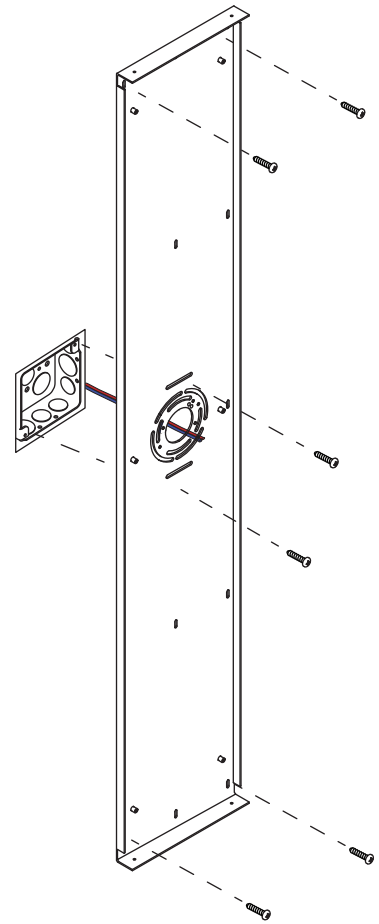

Mount the backplate to the junction box or wall using a Phillips head screwdriver to tighten the mounting screws. For additional support, mount the backplate to the wall using anchors appropriate for your wall material.

Make sure blue and red leads are accessible.


Step 4

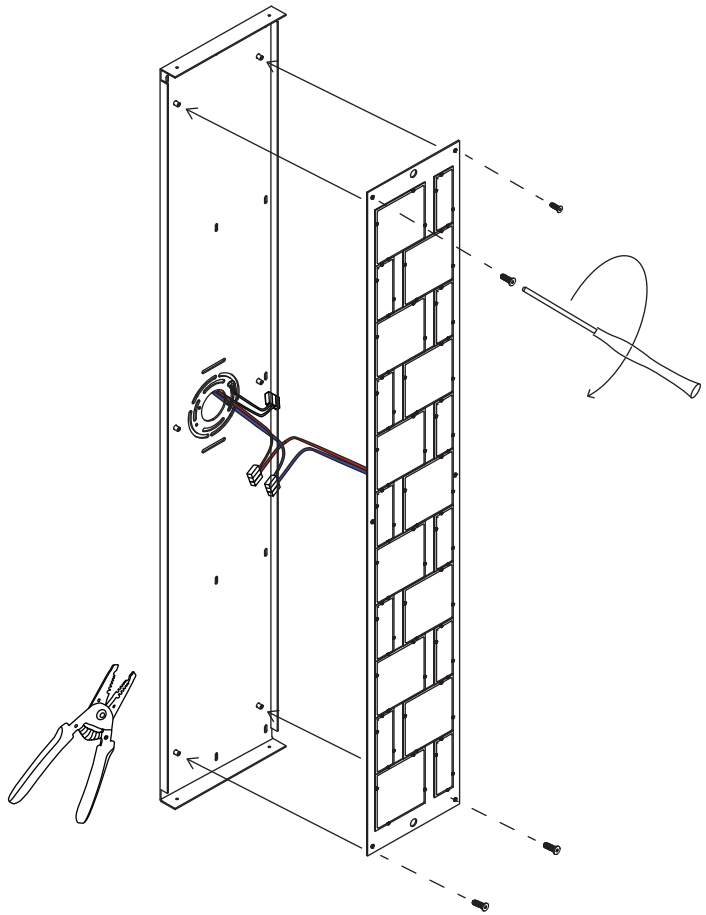

Connect the blue and red wires from the driver to the blue and red wires on the LED light source located on LED board. If needed, use a wire stripper to remove 3/8” insulation from each wire before inserting them into the corresponding wago clip.


Align holes on LED board with threaded standoffs on backplate. Secure board with screwdriver found in hardware pack.

Step 5

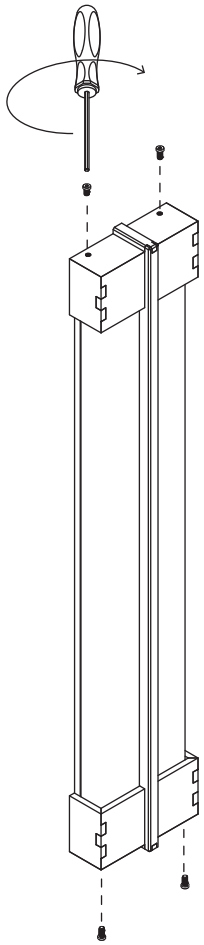

Align the holes of the backplate with the holes of the Ecco Surface Mount Assembly. Secure the assembly in place with the canopy screws and screwdriver found in the hardware pack.

Step 6

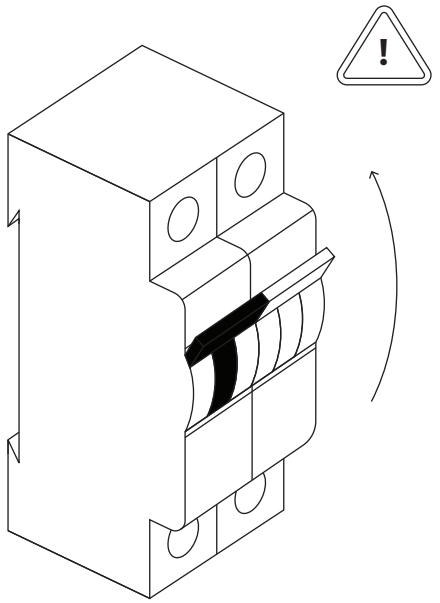

Turn the power back on at the main fuse box or circuit panel you disabled before installation. Turn on the light :)

Never use scouring pads or abrasive cleaning solutions. If it comes in a bottle, it is bad for your fixture. Instead, we recommend using soft microfiber cloths, which are gentler on our products and the planet.

For Metal: Wipe with a damp or dry microfiber cloth. Please note that our brass is unlaquered, and will darken naturally over time.

For Glass: Wipe clear or colored glass with a damp microfiber cloth. For sandblasted or etched glass, use a dry microfiber cloth. Removable glass shades can be washed carefully in a sink using warm or hot water.

For Ceramic: Wipe with a damp microfiber cloth. Do not submerge in water.