Onda Sconce

Assembly Guide



Thank you for choosing In Common With. Please confirm that you received all of the components pictured in this guide, and reach out to us if anything is missing. It's rare, but it happens. We hope you enjoy your fixture. With proper care, it should last a lifetime.


Have questions? Please contact us at support@incommonwith.com.




CAUTION!
Electrical shock risk. Turn off electrical power at the main fuse box or circuit panel before beginning installation, servicing the light, or installing accessories. We recommend working with a qualified electrician familiar with the type of work you'd like done.

ATTENTION!
Risque de choc électrique. Coupez l'alimentation électrique au niveau de la boîte à fusibles principale ou du panneau de circuits avant de commencer l'installation, l'entretien de la lumière ou l'installation d'accessoires. Nous vous recommandons de travailler avec un électricien qualifié familier avec le type de travail que vous souhaitez effectuer.


Onda Sconce, Small
Components

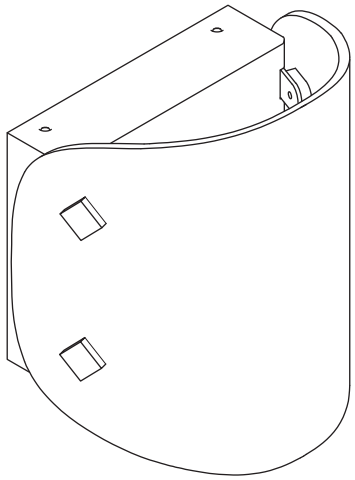


Onda Small Canopy Assembly

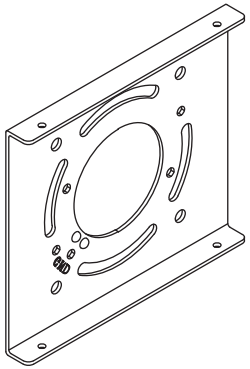

Backplate




Canopy Screws (4)




Hardware Pack

Step 1

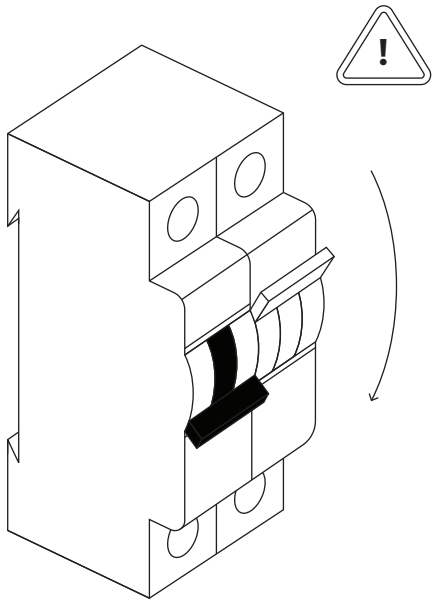


Before beginning installation, turn off electrical power at the main fuse box or circuit panel.

Step 2

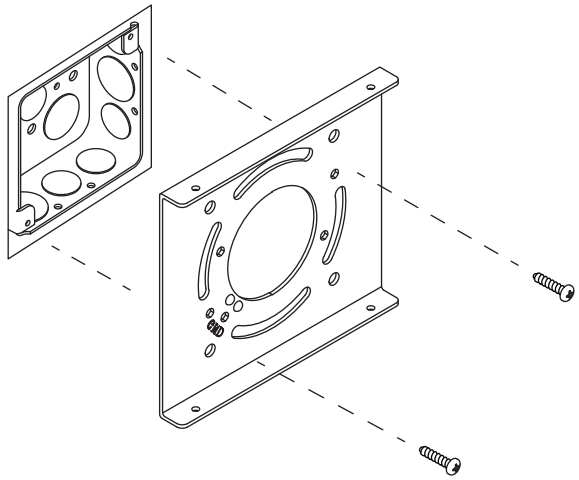


Mount backplate to the junction box using a phillips head screwdriver to tighten the mounting screws.

Step 3

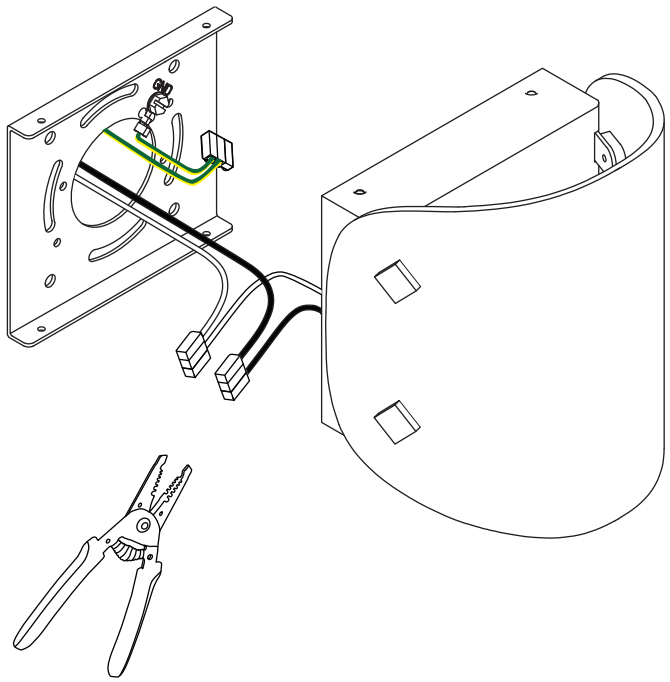


Use the wago clips to connect the fixture's wires to the corresponding wires from the junction box in the wall or ceiling. White is neutral; Black is live; Green/Yellow is ground. One ground wire will be attached to the backplate, the other ground wire should come from the junction box. If you are using 0-10V dimming connect the pink and purple wires to the dimming system. If you are using TRIAC or ELV dimming, simply cap the wago on the ends of the purple and pink wire. If needed use a wire stripper to remove 3/8" of the insulation from each wire before inserting them into the corresponding wago clip.

Step 4

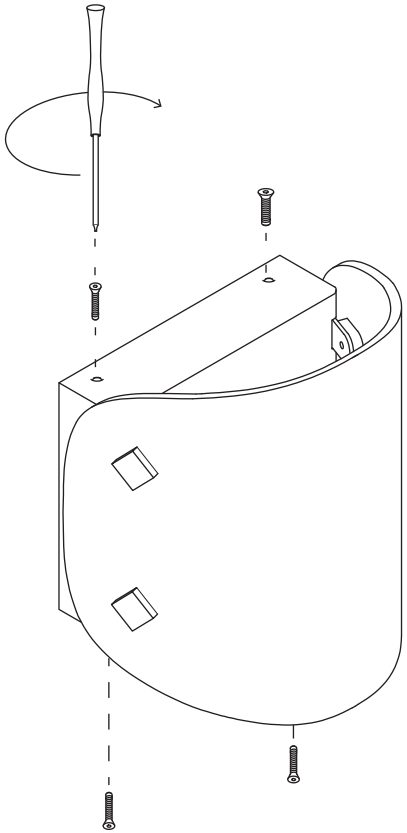


Align the holes of the backplate with the holes of the canopy cover. Secure the canopy cover in place with the canopy screws and screwdriver found in the hardware pack.

Step 5

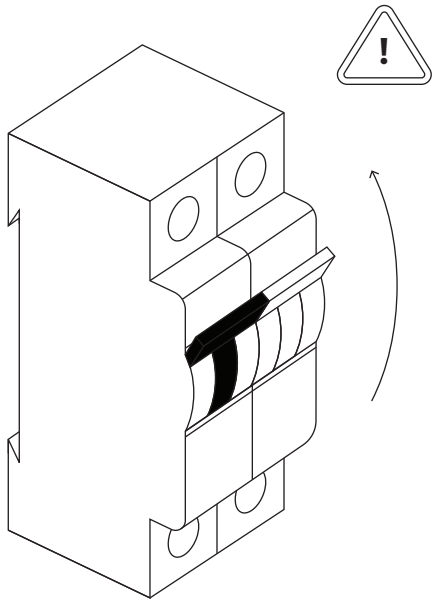


Turn the power back on at the main fuse box or circuit panel you disabled before installation. Turn on the light :)


Onda Sconce, Medium
Components

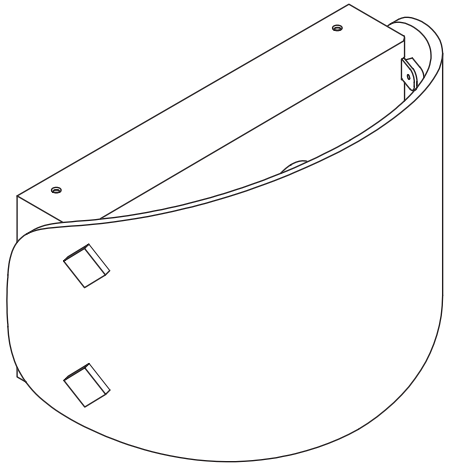


Onda Medium Canopy Assembly

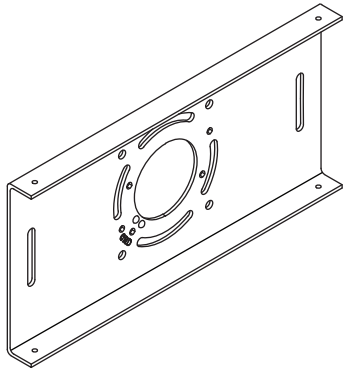

Backplate




Canopy Screws (4)




Hardware Pack

Step 1

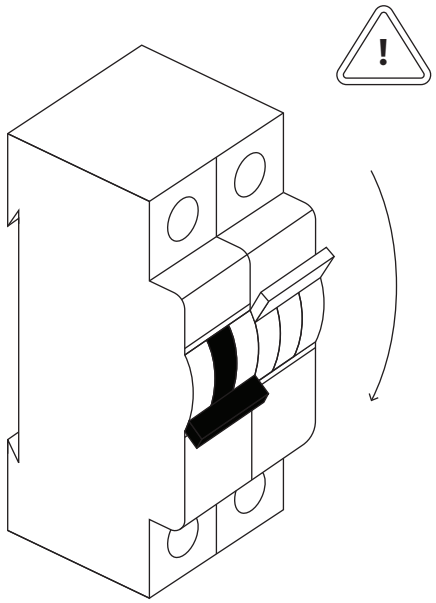


Before beginning installation, turn off electrical power at the main fuse box or circuit panel.

Step 2

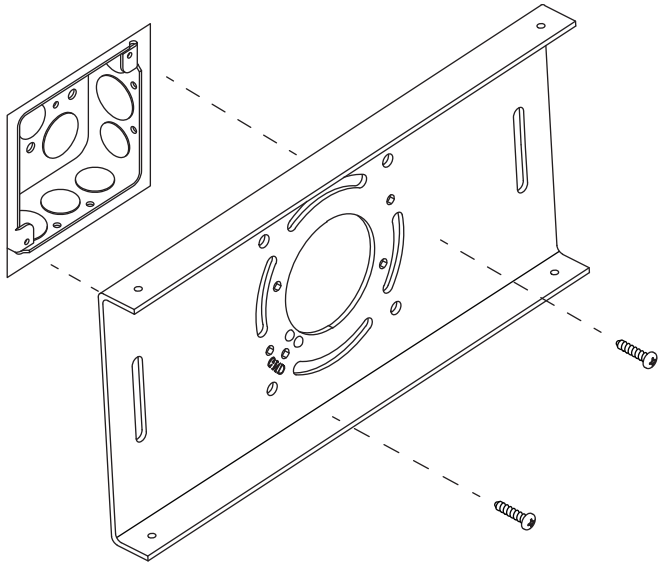


Mount the backplate to the junction box using a Phillips head screwdriver to tighten the mounting screws.

Step 3

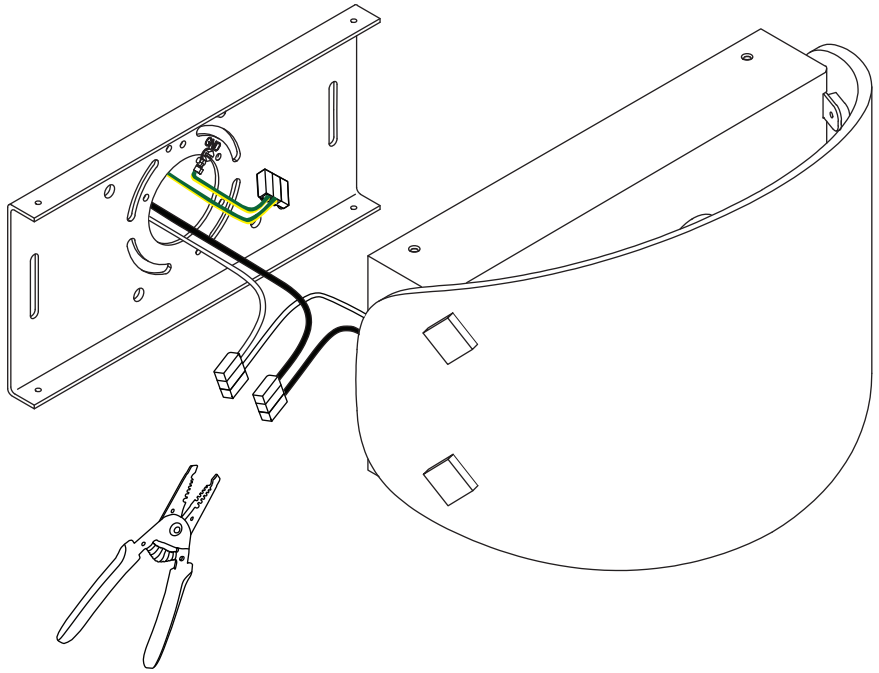


Use the wago clips to connect the fixture's wires to the corresponding wires from the junction box in the wall or ceiling. White is neutral; Black is live; Green/Yellow is ground. One ground wire will be attached to the backplate, the other ground wire should come from the junction box. If you are using 0-10V dimming connect the pink and purple wires to the dimming system. If you are using TRIAC or ELV dimming, simply cap the wago on the ends of the purple and pink wire. If needed use a wire stripper to remove 3/8" of the insulation from each wire before inserting them into the corresponding wago clip.

Step 4

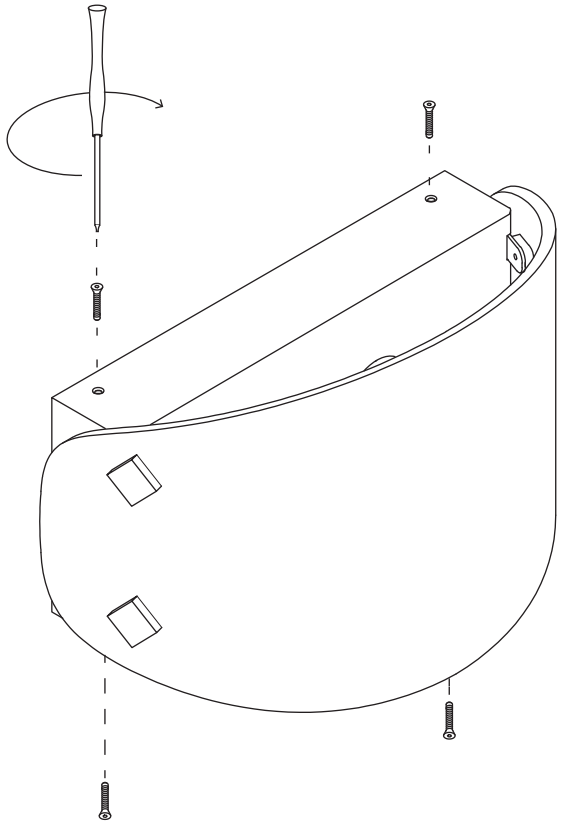


Align the holes of the backplate with the holes of the canopy cover. Secure the canopy cover in place with the canopy screws and screwdriver found in the hardware pack.

Step 5

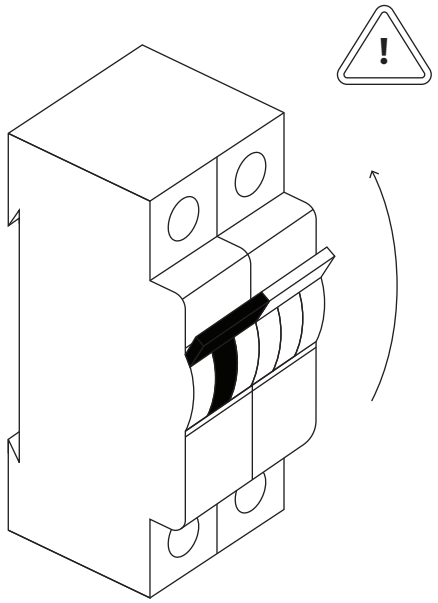


Turn the power back on at the main fuse box or circuit panel you disabled before installation. Turn on the light :)


Onda Sconce, Small, Plug-in
Components

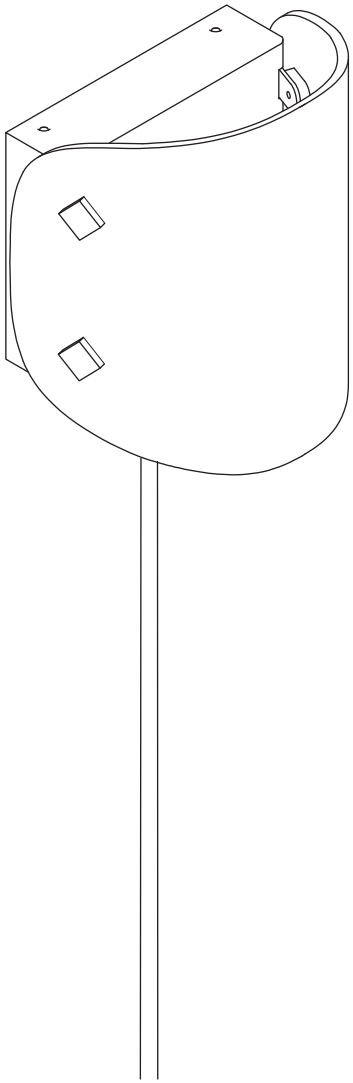

Onda Small Plug-in Assembly

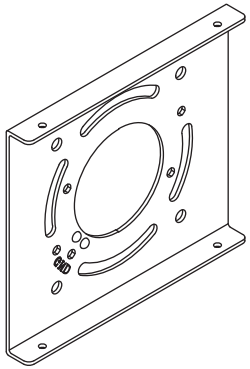


Backplate



Canopy Screws (4)


Screwdriver

Step 1

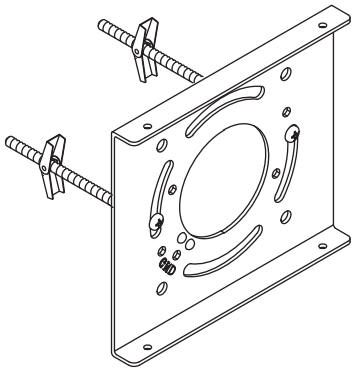


Mount the Backplate to the wall using anchors appropriate for your wall material (not provided). Consult a qualified professional if needed.

Step 2

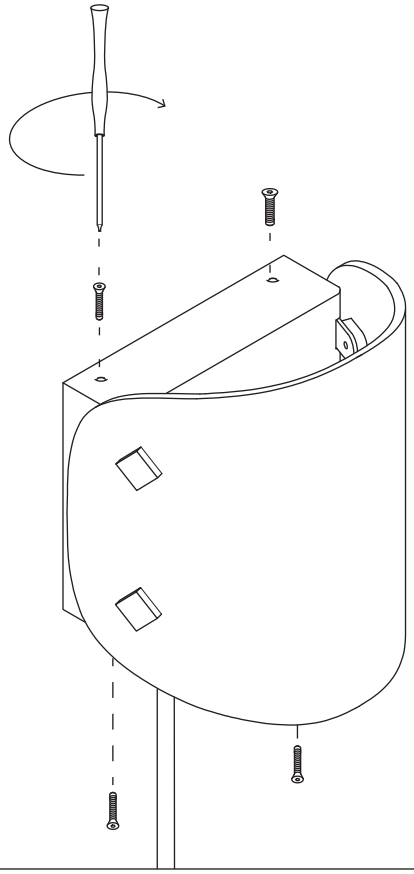


Align the holes of the backplate with the holes of the canopy cover. Secure the canopy cover in place with the canopy screws and screwdriver found in the hardware pack.

Step 3

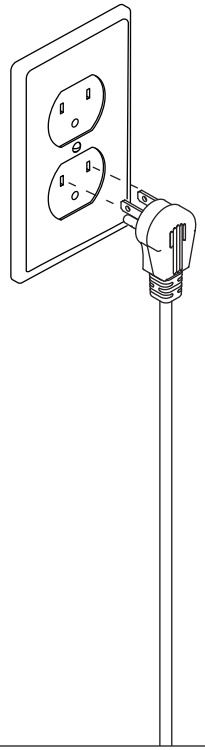


Plug in the cord.

Step 4

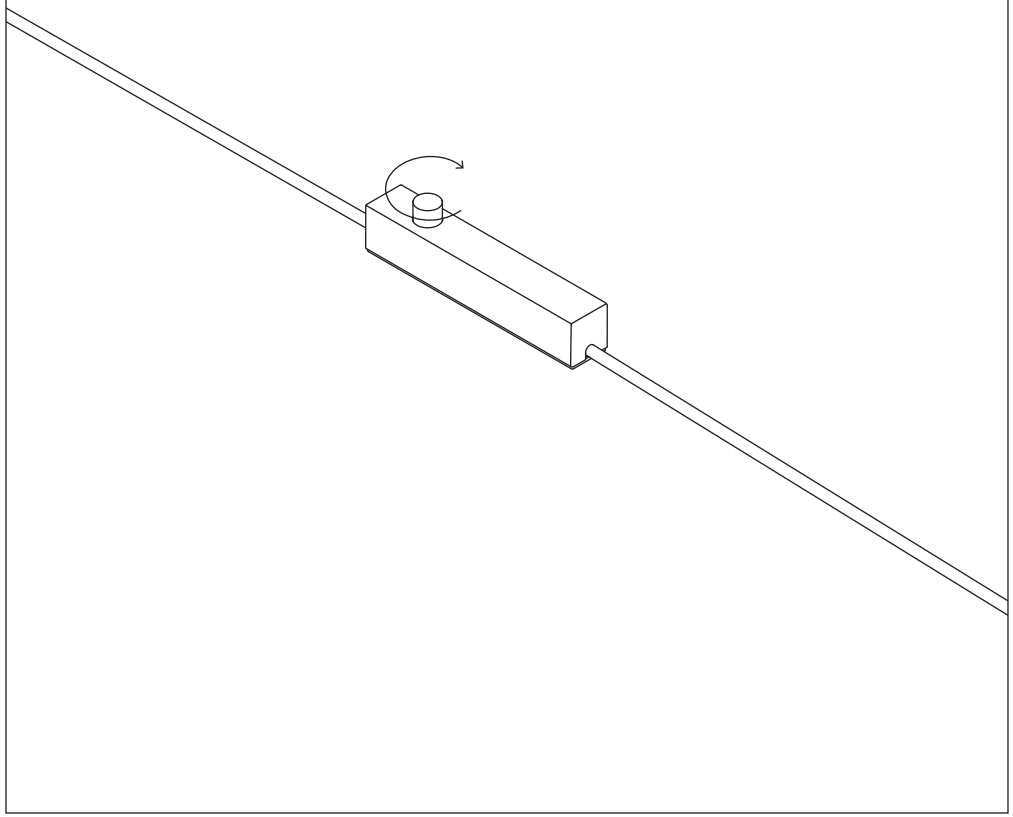


Turn on and dim the light as desired using the inline dimmer located at the middle of the cord.


Onda Sconce, Medium, Plug-in
Components

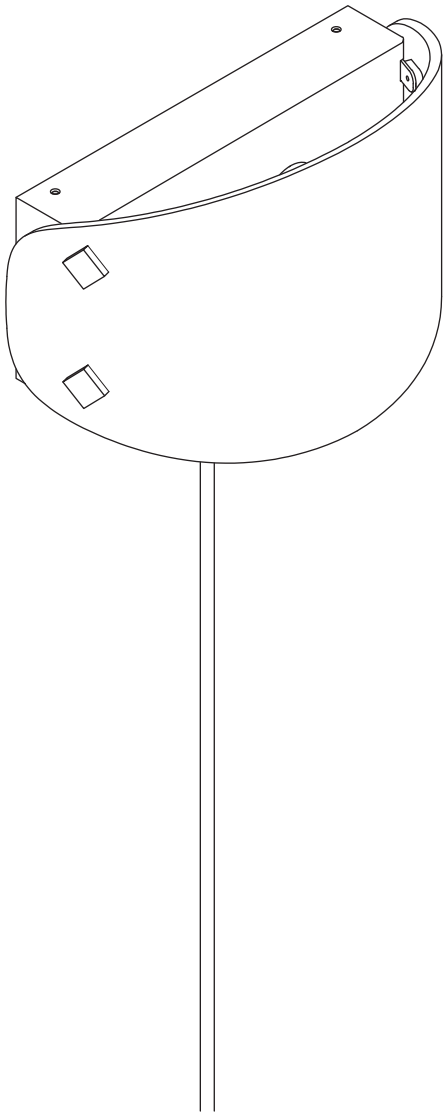

Onda Medium Plug-in Assembly

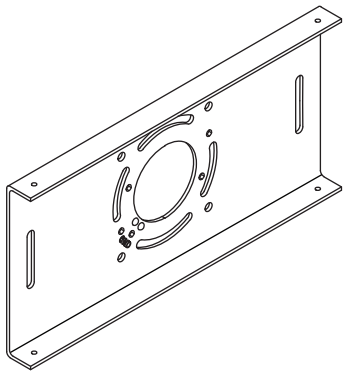


Backplate



Canopy Screws (4)


Screwdriver

Step 1

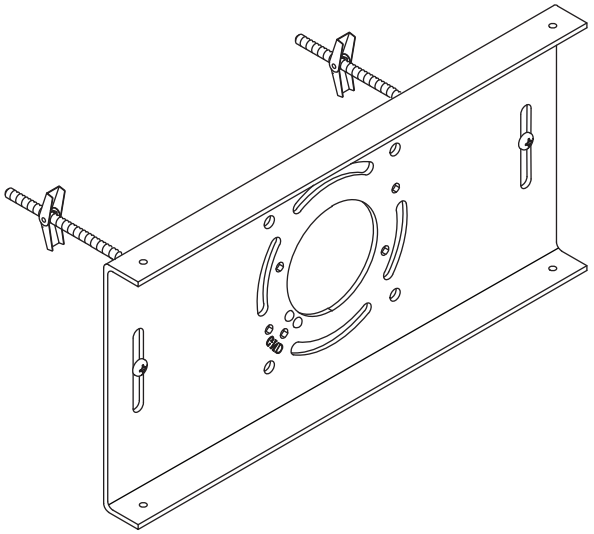


Mount the Backplate to the wall using anchors appropriate for your wall material (not provided). Consult a qualified professional if needed.

Step 2

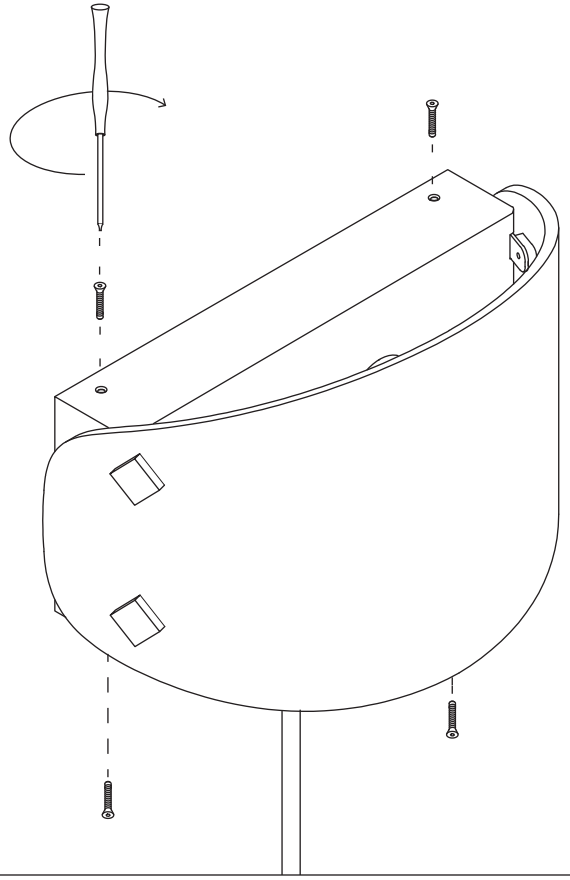


Align the holes of the backplate with the holes of the canopy cover. Secure the canopy cover in place with the canopy screws and screwdriver found in the hardware pack.

Step 5

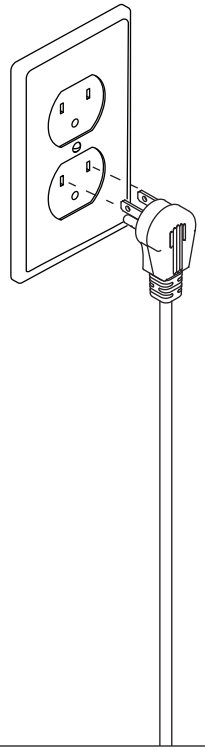

Pluf in the cord.

Step 6

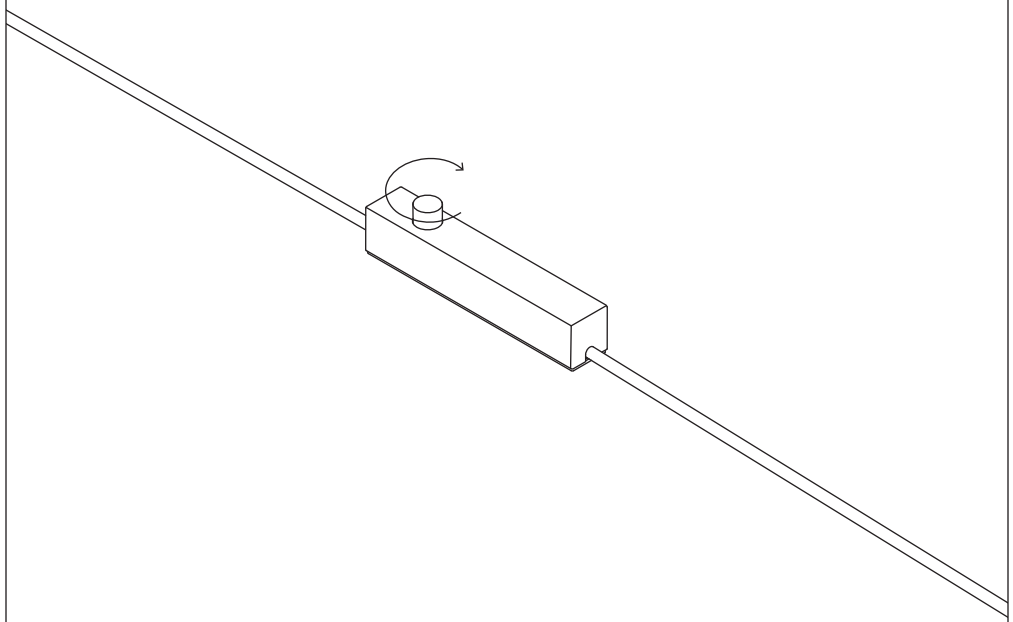

Turn on and dim the light as desired using the inline dimmer located at the middle of the cord.

Never use scouring pads or abrasive cleaning solutions. If it comes in a bottle, it is bad for your fixture. Instead, we recommend using soft microfiber cloths, which are gentler on our products and the planet.

For Metal: Wipe with a damp or dry microfiber cloth. Please note that our brass is unlaquered, and will darken naturally over time.

For Glass: Wipe clear or colored glass with a damp microfiber cloth. For sandblasted or etched glass, use a dry microfiber cloth. Removable glass shades can be washed carefully in a sink using warm or hot water.

For Ceramic: Wipe with a damp microfiber cloth. Do not submerge in water.