

In Common With

Mira Surface Mount

Technical Specifications
sales@incommonwith.com
+1 (917) 830-8700
incommonwith.com




Mira Surface Mount, Small




Technical Specifications	Materials	Glass, Wood, Steel
	Product weight	2 lbs
	Lead time	12 weeks
	Integrated LED	1,100 lm / 1800K -3000K / 12 W / 95+ CRI
	Input Voltage	120 V, 240 V or 277 V
	Dimmer	TRIAC, ELV or 0-10 V
	Certifications	cULus listed, cETLus listed, damp-rated, ADA compliant
		   
Notes	1. This fixture can be installed on a wall or ceiling. 2. This fixture has handmade elements and may exhibit variability within the same piece. These variations are inherent in the production process and are not to be considered as defects. We do our best to maintain a consistent product while honoring handmade craftsmanship. 3. Dimensions may vary within half an inch. 4. The LED lifetime is 50,000 hours. 5. The driver, (class 2 power unit) is included with the fixture and can be installed inside of the J-box with a minimum depth of 1 1/2" or remotely. 6. This fixture is designed so the LED board can be replaced when it reaches its lifetime. 7. This fixture meets the requirements of the Americans with Disabilities Act (ADA) of 1990.	
Updated	November 18, 2025	


Front View

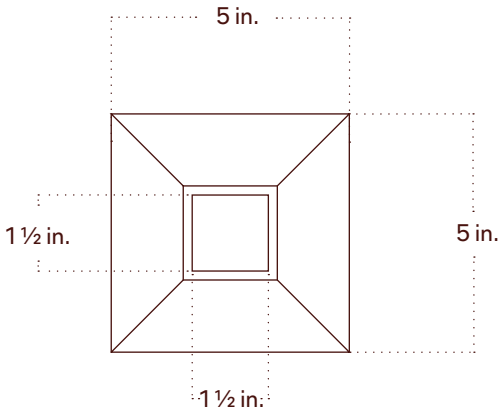


Side View




Front View: Ceiling Installation




Isometric View




Front View



Solid



Powder



Stripe





Mira Surface Mount, Linear



Technical Specifications	Materials	Glass, Wood, Steel
	Product weight	6.5 lbs
	Lead time	12 weeks
	Integrated LED	1,140 lm / 2700K / 12 W / 92+ CRI
	Input Voltage	120 V, 240 V or 277 V
	Dimmer	TRIAC, ELV or 0–10 V
	Certifications	cULus listed, cETLus listed, IP44-rated, ADA compliant
		   

Notes	1. This fixture can be installed on a wall or ceiling. 2. Universal canopy mounting is located at the center of the fixture. Additional anchor holes are available for added support. 3. This fixture has handmade elements and may exhibit variability within the same piece. These variations are inherent in the production process and are not to be considered as defects. We do our best to maintain a consistent product while honoring handmade craftsmanship. 4. Dimensions may vary within half an inch. 5. The LED lifetime is 50,000 hours. 6. The driver, (class 2 power unit) is included within the fixture. 7. This fixture is designed so the LED board can be replaced when it reaches its lifetime. 8. This fixture meets the requirements of the Americans with Disabilities Act (ADA) of 1990.
-------	---





Updated	November 18, 2025
---------	-------------------

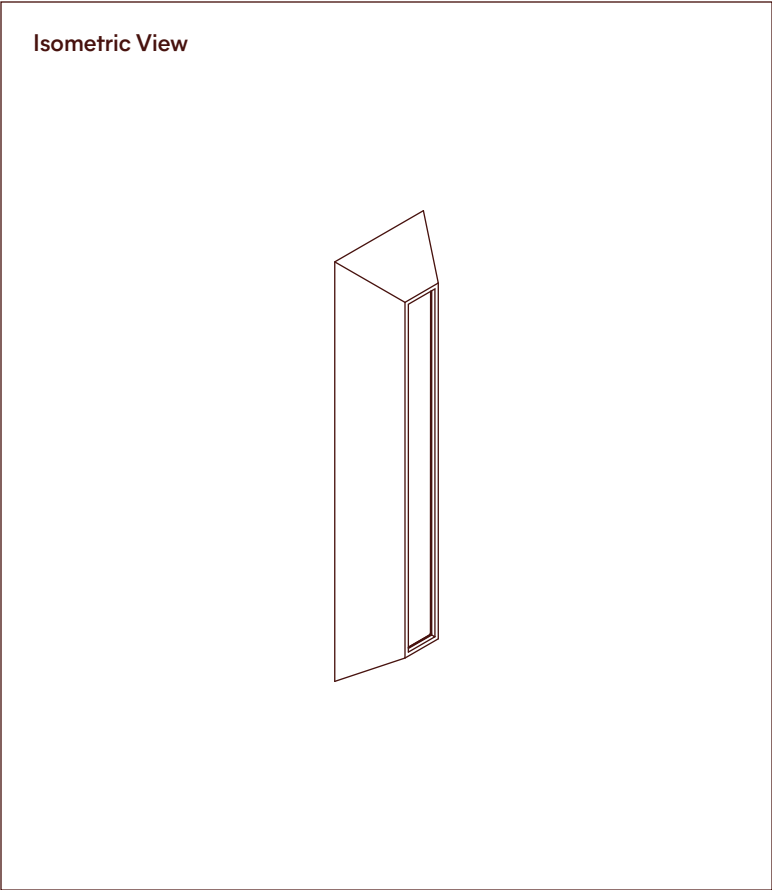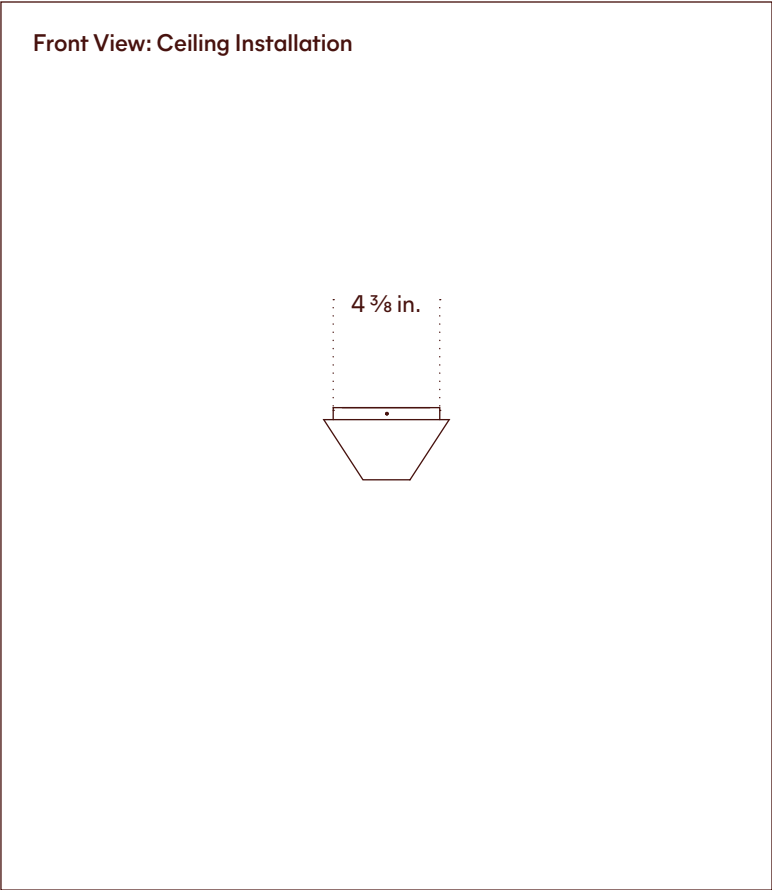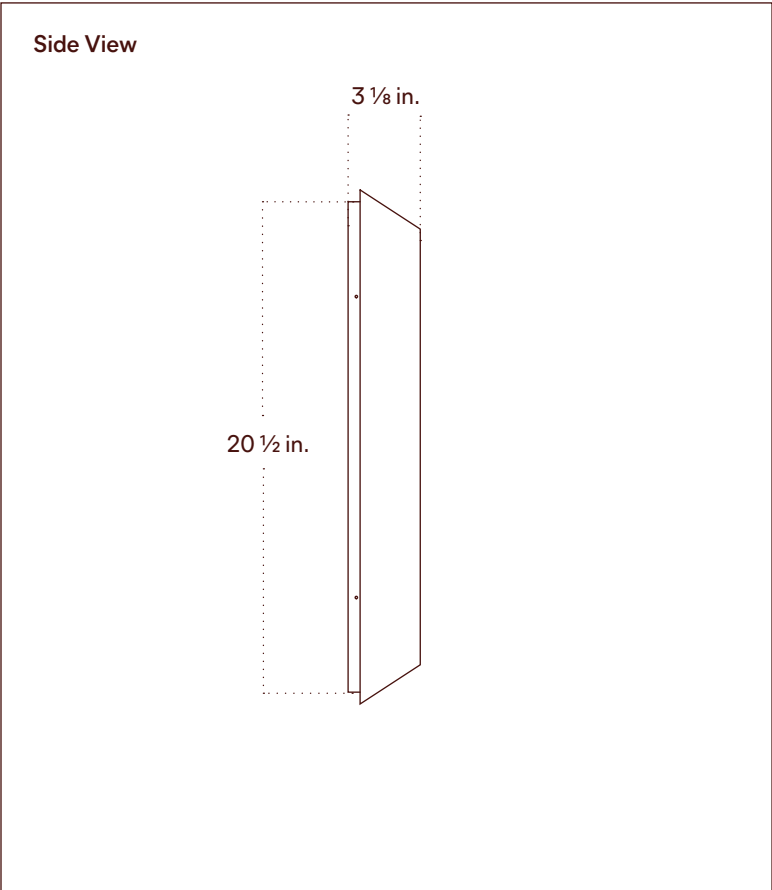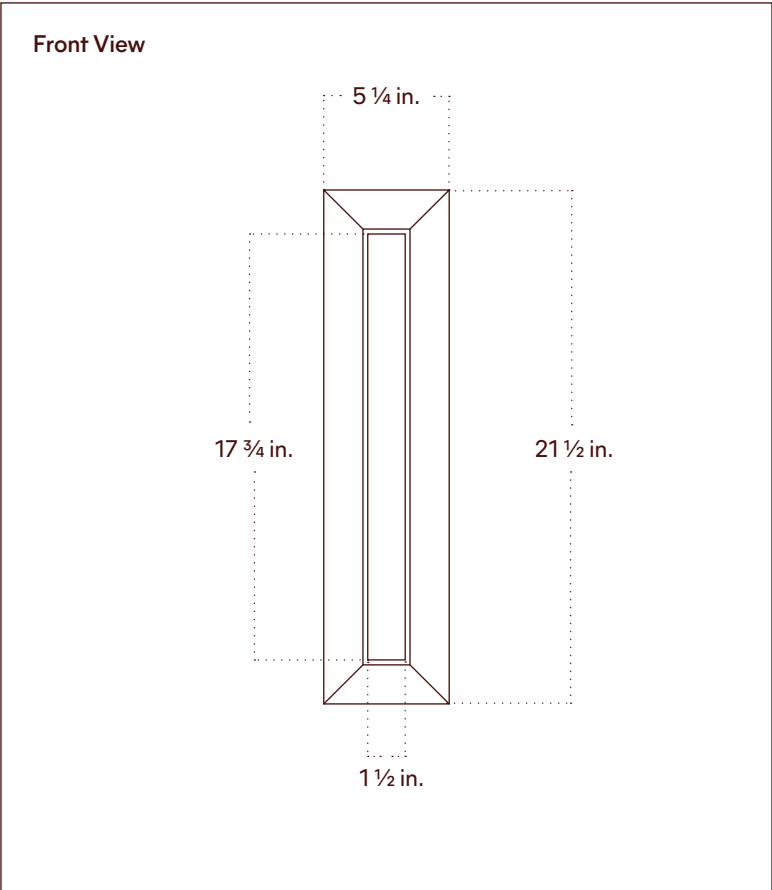


Mira Surface Mount, Linear, Plug-in




Technical Specifications	Materials	Glass, Wood, Steel
	Product weight	6.5 lbs
	Lead time	12 weeks
	Integrated LED	1,140 lm / 2700K / 12 W / 92+ CRI
	Input Voltage	120 V, 240 V or 277 V
	Dimmer	TRIAC, ELV or 0–10 V
	Certifications	cULus listed, cETLus listed,  
Notes		
	1.	Universal canopy mounting is located at the center of the fixture. Additional anchor holes are available for added support.
	2.	This fixture comes with a 16-foot chocolate brown fabric cord. The dimmer switch is our black painted metal finish and is located 8 feet from the plug.
	3.	This fixture has handmade elements and may exhibit variability within the same piece. These variations are inherent in the production process and are not to be considered as defects. We do our best to maintain a consistent product while honoring handmade craftsmanship.
	4.	Dimensions may vary within half an inch.
	5.	The LED lifetime is 50,000 hours.
	6.	The driver, (class 2 power unit) is included within the fixture.
	7.	This fixture is designed so the LED board can be replaced when it reaches its lifetime.
Updated		
	November 18, 2025	

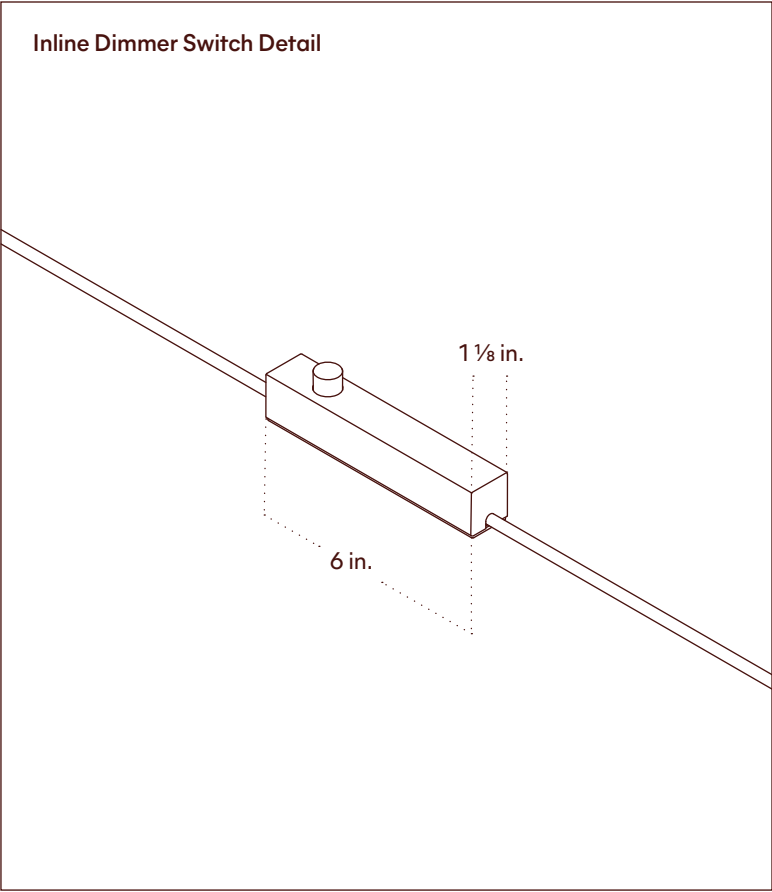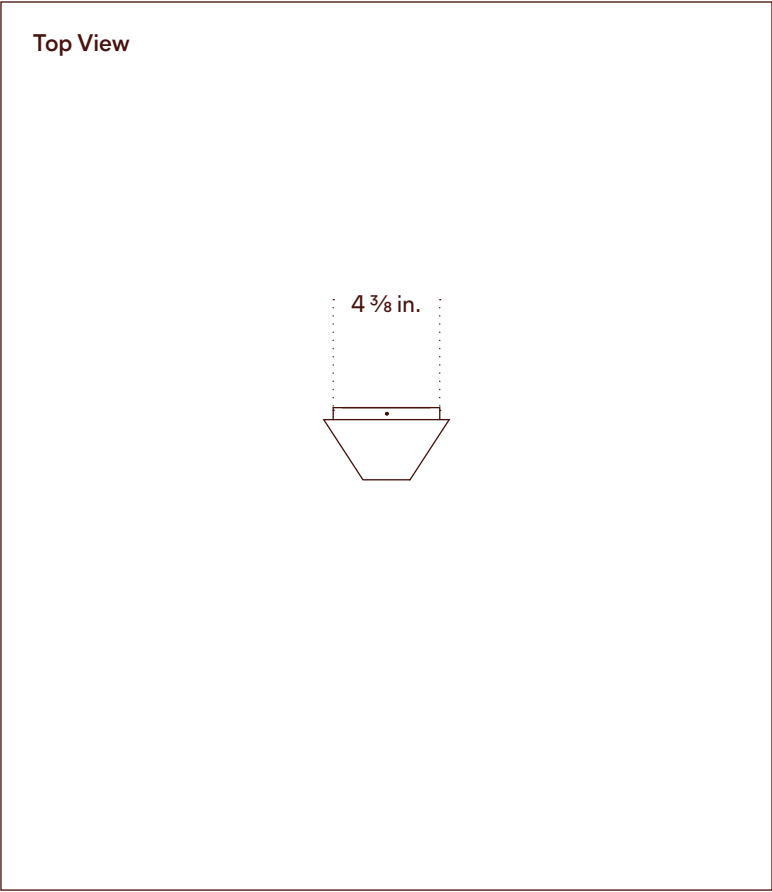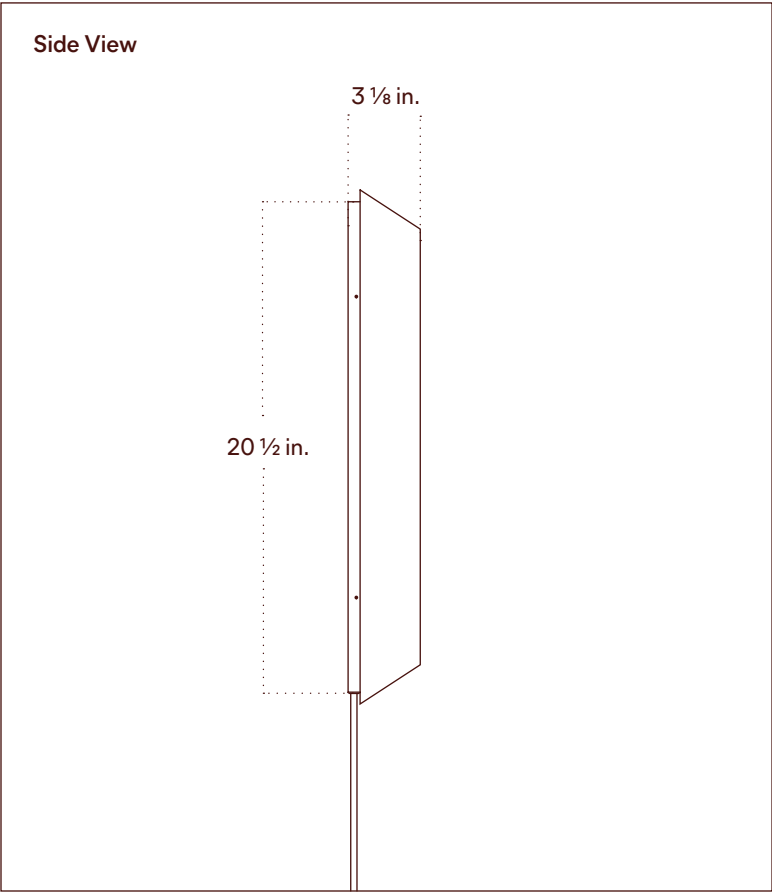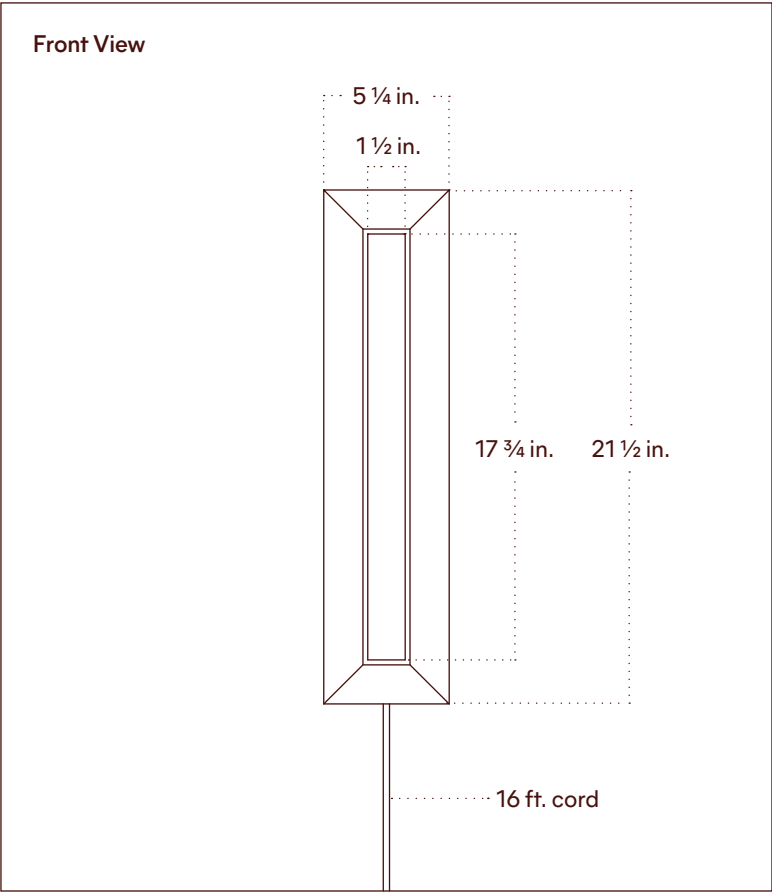


Front View



Solid



Powder



Stripe

Mira Surface Mount, Medium




Technical Specifications	Materials	Glass, Wood, Steel
	Product weight	12 lbs
	Lead time	12 weeks
	Integrated LED	2,565 lm / 2700 K / 27 W / 92+CRI
	Input Voltage	120 V, 240 V or 277 V
	Dimmer	TRIAC, ELV or 0-10 V
	Certifications	cULus listed, cETLus listed, damp-rated
		  


Notes	1. This fixture can be installed on a wall or ceiling. 2. Universal canopy mounting is located at the center of the fixture. Additional anchor holes are available for added support. 3. This fixture has handmade elements and may exhibit variability within the same piece. These variations are inherent in the production process and are not to be considered as defects. We do our best to maintain a consistent product while honoring handmade craftsmanship. 4. Dimensions may vary within half an inch. 5. The LED lifetime is 50,000 hours. 6. The driver, (class 2 power unit) is included within the fixture. 7. This fixture is designed so the LED board can be replaced when it reaches its lifetime.
-------	--

Updated	November 18, 2025
---------	-------------------


Front View

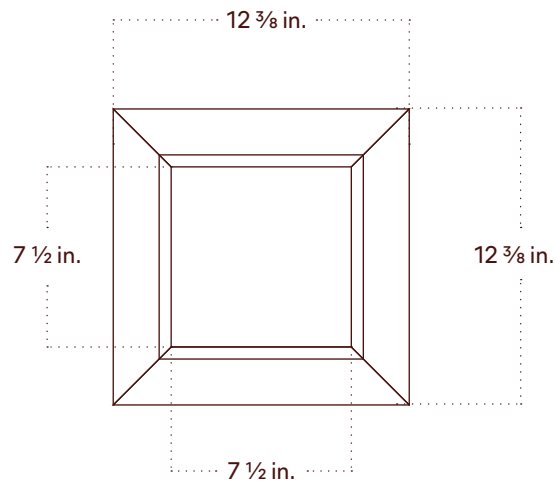


Side View

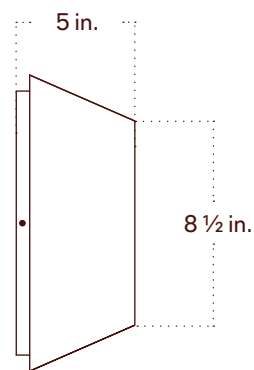

Front View: Ceiling Installation







Isometric View

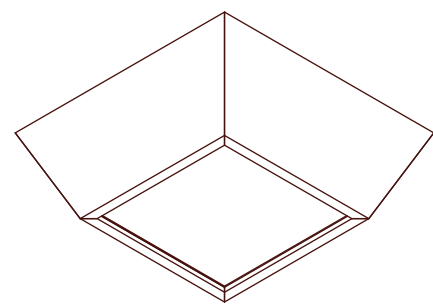


Mira Surface Mount, Medium, Plug-in




Technical Specifications	Materials	Glass, Wood, Steel
	Product weight	12 lbs
	Lead time	12 weeks
	Integrated LED	2,565 lm / 2700K / 27 W / 92+ CRI
	Input Voltage	120 V
	Dimmer	Integrated Dimmer Switch
	Certifications	cULus listed, cETLus listed,  
Notes	1.	Universal canopy mounting is located at the center of the fixture. Additional anchor holes are available for added support.
	2.	This fixture comes with a 16-foot chocolate brown fabric cord. The dimmer switch is our black painted metal finish and is located 8 feet from the plug.
	3.	This fixture has handmade elements and may exhibit variability within the same piece. These variations are inherent in the production process and are not to be considered as defects. We do our best to maintain a consistent product while honoring handmade craftsmanship.
	4.	Dimensions may vary within half an inch.
	5.	The LED lifetime is 50,000 hours.
	6.	The driver, (class 2 power unit) is included within the fixture.
	7.	This fixture is designed so the LED board can be replaced when it reaches its lifetime.
Updated		
	November 18, 2025	

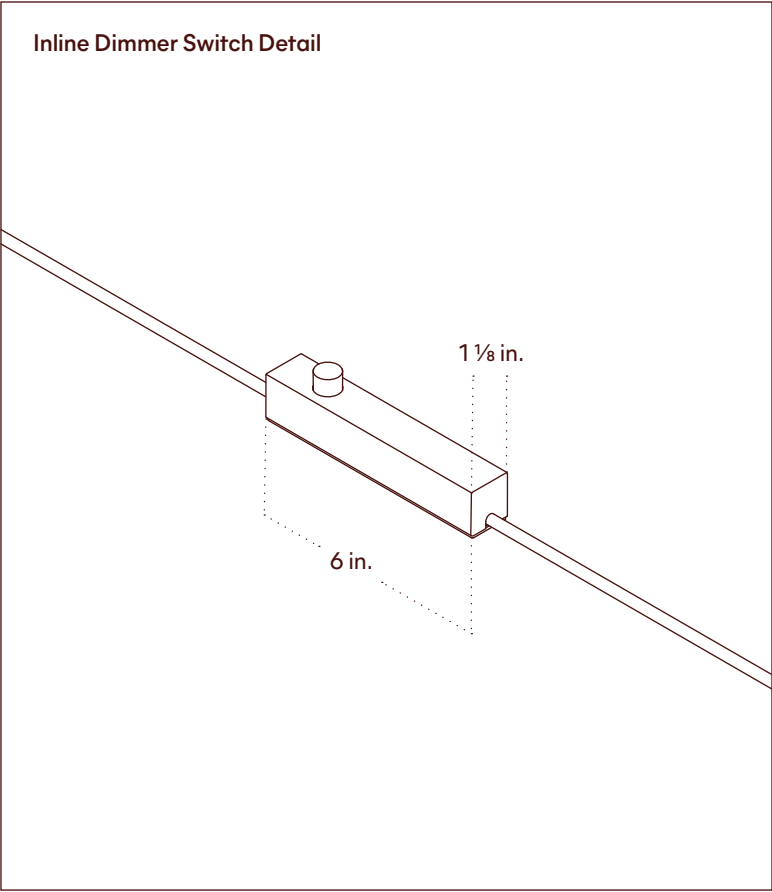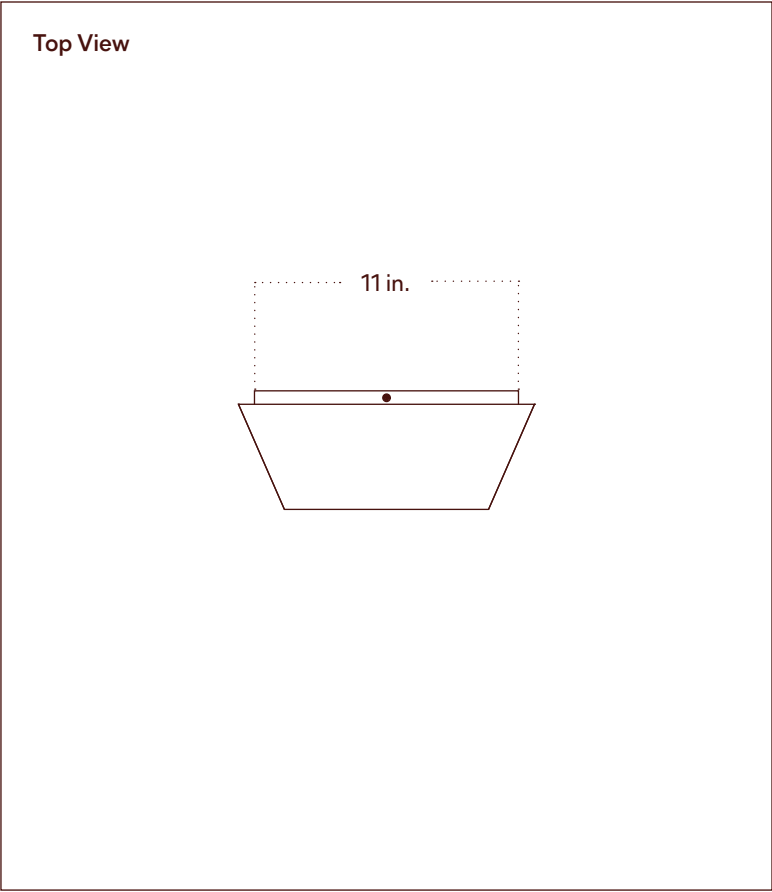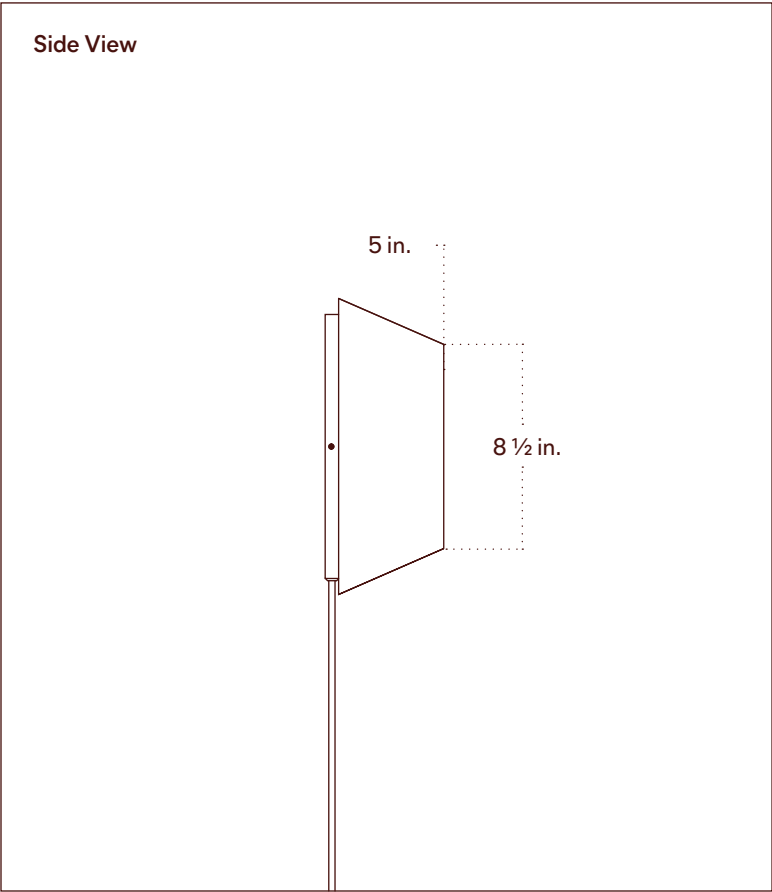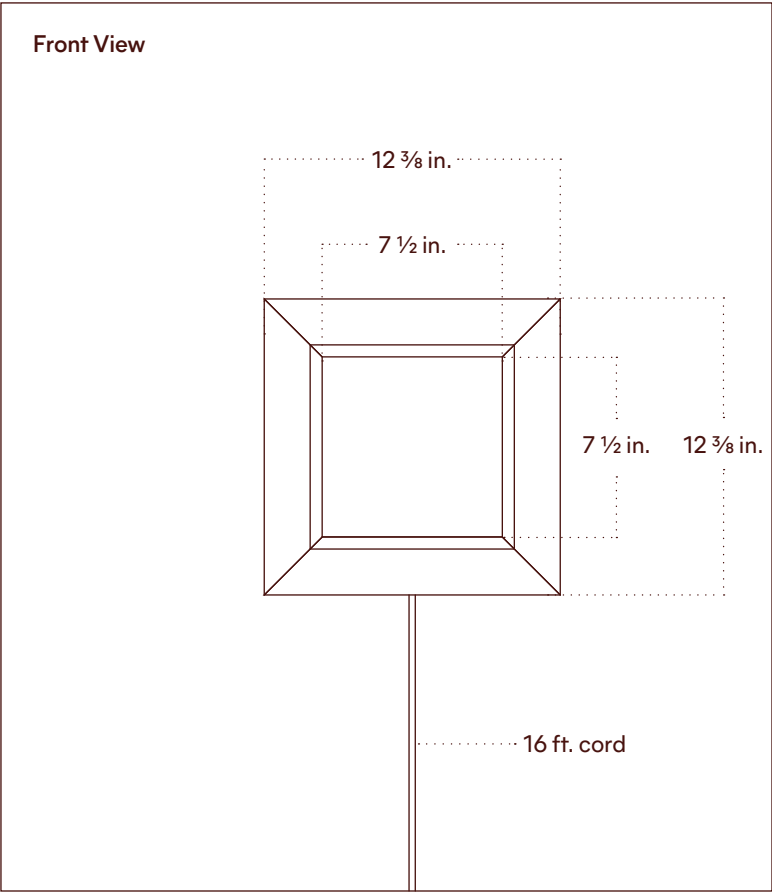


Front View




Solid




Powder




Stripe




Patchwork



Field



Bond




Mosaic

Finish Options


Brass, glass, and ceramic samples made or finished by hand may exhibit variability. Available for purchase at incommonwith.com/finishes.

Solid Glass

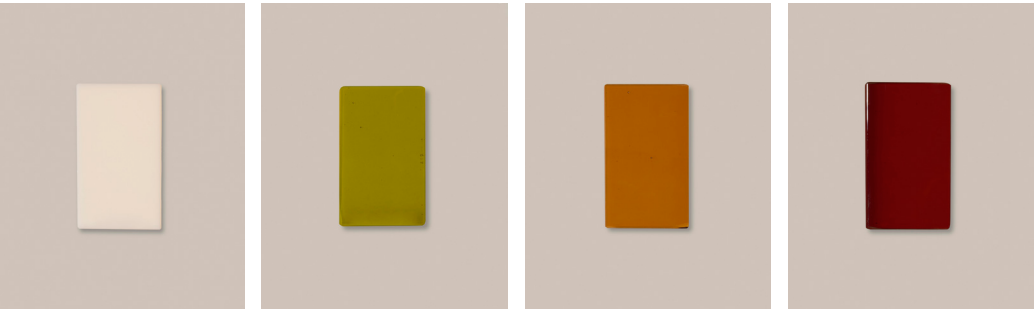


Almond Olive Pecan Cherry

Powder Glass

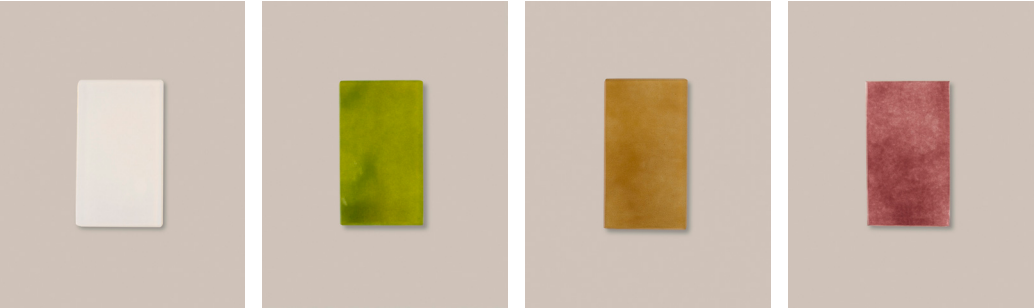

Cirrus Moss Umber Plum

Striped Glass

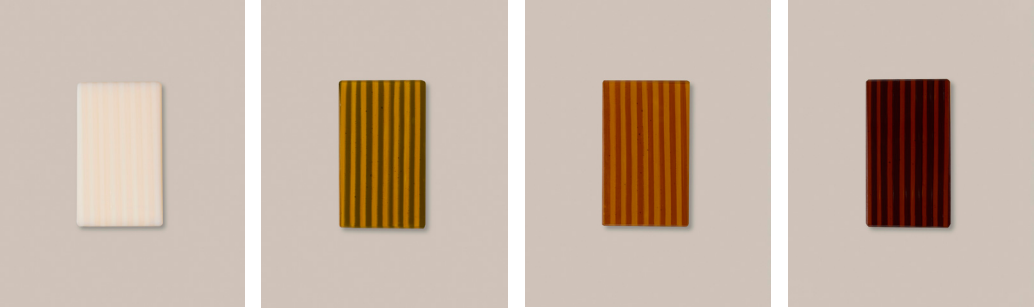

Vellum Zinnia Marigold Garnet

Finish Options


Brass, glass, and ceramic samples made or finished by hand may exhibit variability. Available for purchase at [incommonwith.com/finishes](https://www.incommonwith.com/finishes).

Patterned Glass



Alba Algae Harvest Canyon

Wood

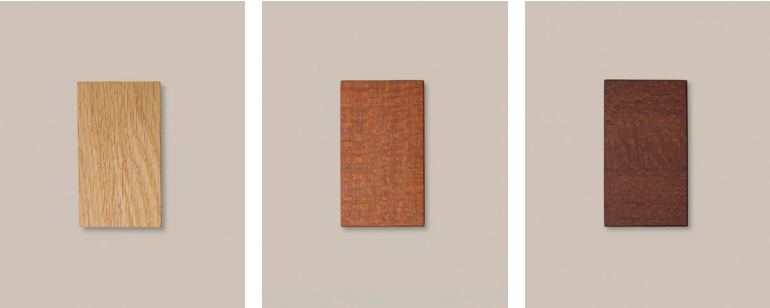

Oak Leopardwood Darkened Leopardwood