

In Common With

Saga Pendant

Technical Specifications
sales@incommonwith.com
+1 (917) 830-8700
incommonwith.com



Saga Pendant, Solo




Technical Specifications	Materials	Aluminum, LDPE
	Product weight	16 lbs
	Lead time	3 days
	Integrated LED	3,575 lm / 1800 K – 3000 K / 50.2 W / 95+ CRI / warm on dim
	Input Voltage	120 V, 240 V, or 277 V
	Dimmer	TRIAC, ELV, or 0–10V
	Certifications	cETLus listed, damp-rated




Notes	1. The standard overall length of the fixture is 82.5 inches, which is included in the price. If additional length is required, it is priced per 6-foot increment. 2. The fixture’s minimum overall height is 15 inches. The fixture’s maximum OAH is 82.5 inches without a seam. For installations requiring additional height, stems can be added to extend the fixture. With additional stems, the maximum OAH reaches 224 inches, with the seam positioned at 72 inches. 3. Stems for the fixture are adjustable and can be cut on-site by the installer to fit the precise height requirements of the installation. A pipe cutter is provided with the fixture to ensure clean, accurate cuts. 4. The fixture utilizes high-performance LED technology with a lifetime of 50,000 hours. 5. The LED driver is integrated within the fixture, simplifying installation. Only the larger canopy (provided with the fixture) requires a connection to a junction box. 6. If installing the fixture on a sloped ceiling, customization options are available. Please inquire for specific adjustments to ensure the fixture meets the unique angles and dimensions of your ceiling.
-------	---




Updated	November 6, 2025
---------	------------------

Front View

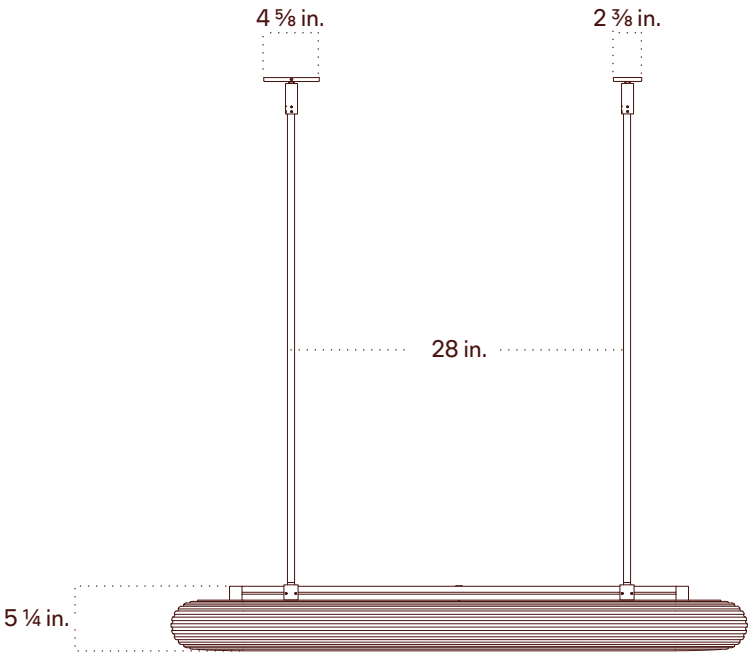


Bottom View

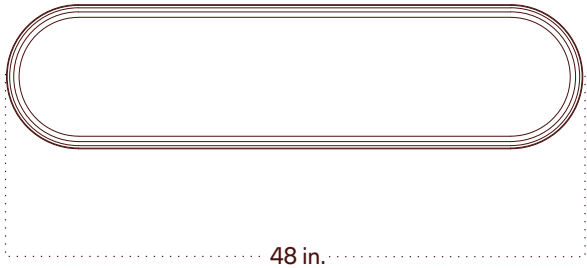

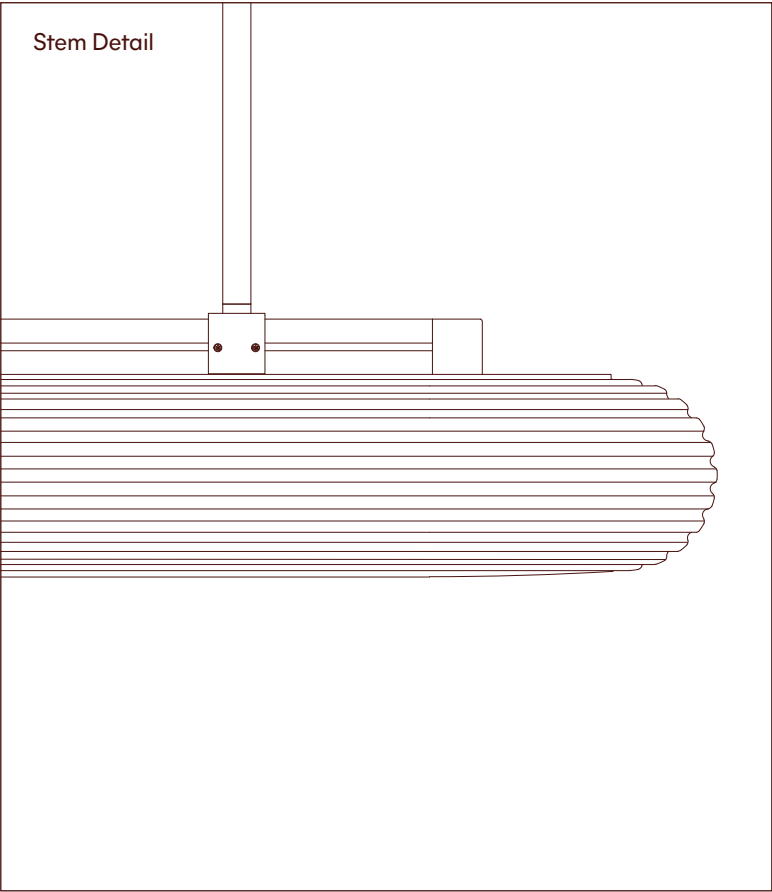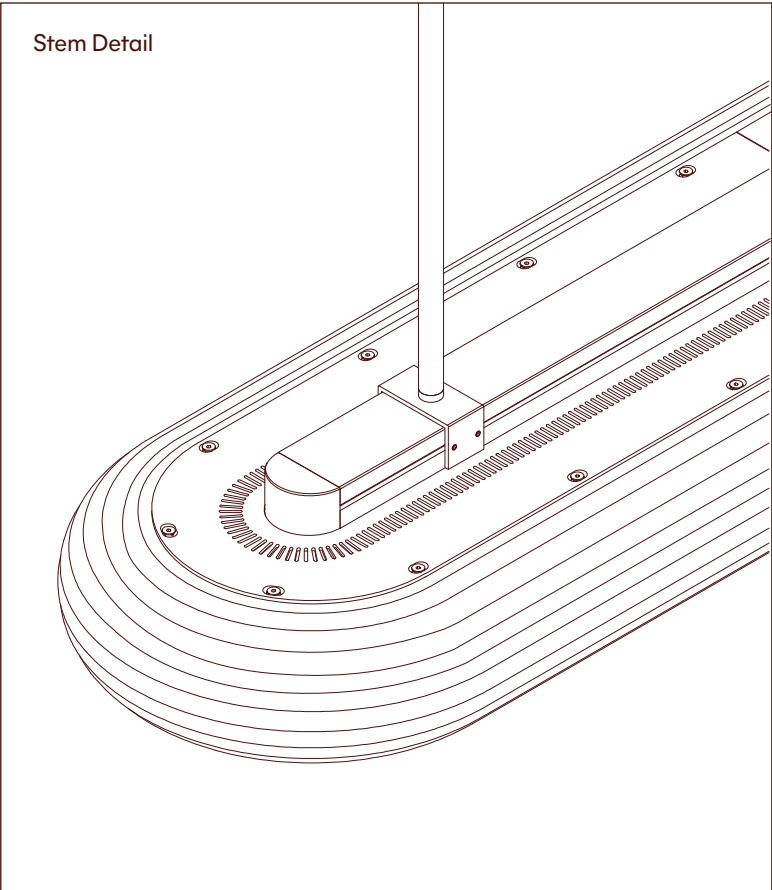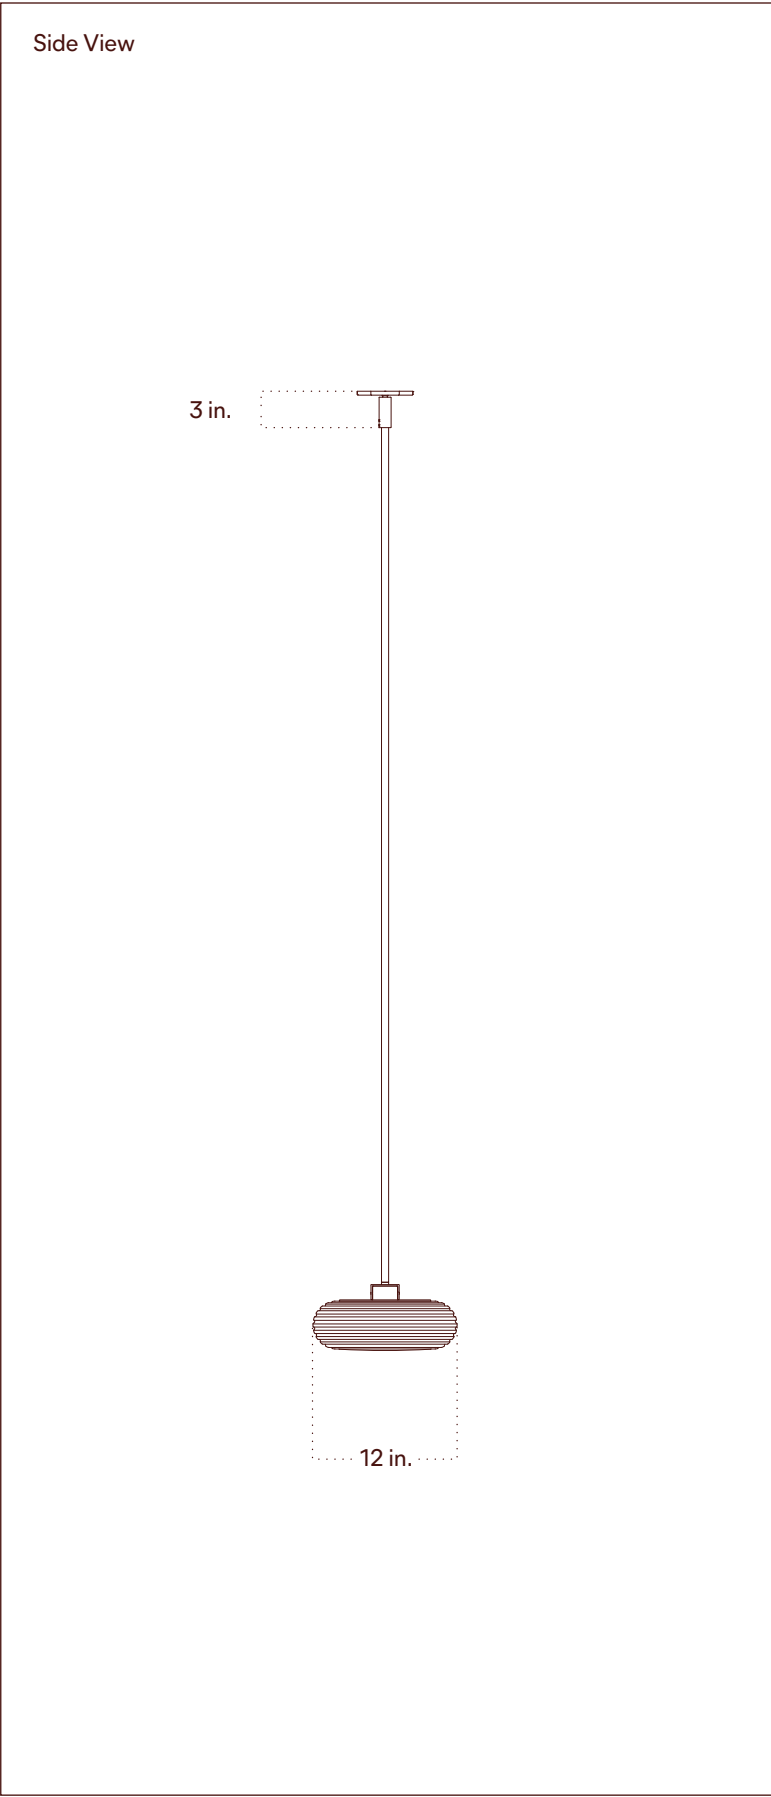

Isometric View

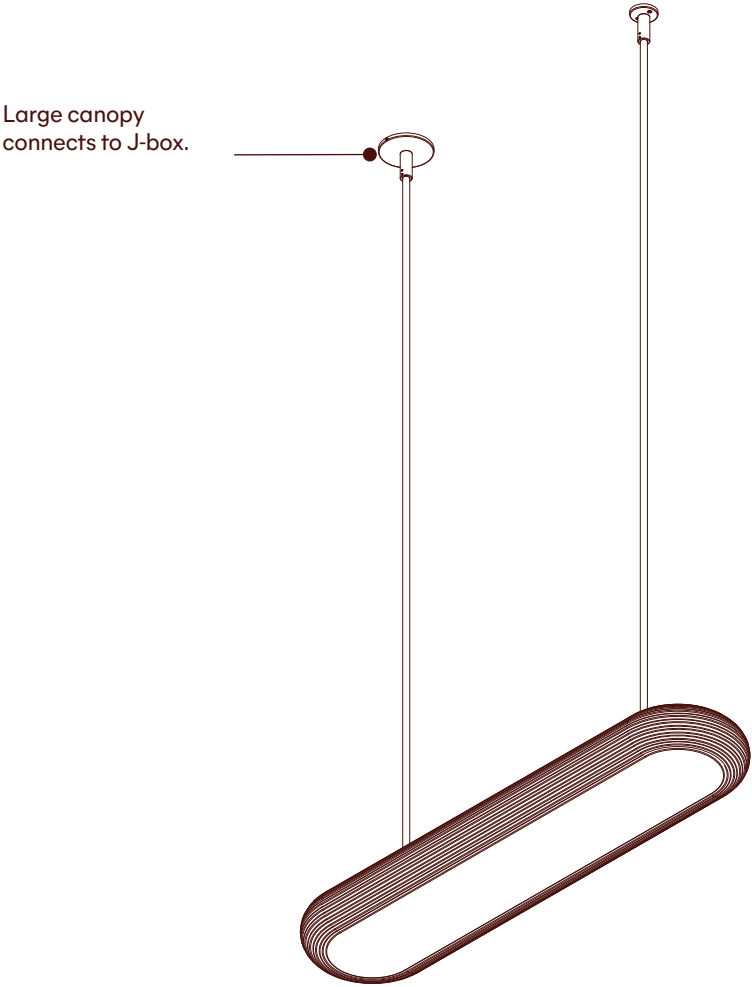

Saga Pendant, Duo




Technical Specifications	Materials	Aluminum, LDPE
	Product weight	19 lbs
	Lead time	3 days
	Integrated LED	4,650 lm / 1800 K – 3000 K / 65.3 W / 95+ CRI / warm on dim
	Input Voltage	120 V, 240 V, or 277 V
	Dimmer	TRIAC, ELV, or 0–10V
	Certifications	cETLus listed, damp-rated




Notes	1. The standard overall length of the fixture is 82.5 inches, which is included in the price. If additional length is required, it is priced per 6-foot increment. 2. The fixture’s minimum overall height is 15 inches. The fixture’s maximum OAH is 82.5 inches without a seam. For installations requiring additional height, stems can be added to extend the fixture. With additional stems, the maximum OAH reaches 224 inches, with the seam positioned at 72 inches. 3. Stems for the fixture are adjustable and can be cut on-site by the installer to fit the precise height requirements of the installation. A pipe cutter is provided with the fixture to ensure clean, accurate cuts. 4. The fixture utilizes high-performance LED technology with a lifetime of 50,000 hours. 5. The LED driver is integrated within the fixture, simplifying installation. Only the larger canopy (provided with the fixture) requires a connection to a junction box. 6. If installing the fixture on a sloped ceiling, customization options are available. Please inquire for specific adjustments to ensure the fixture meets the unique angles and dimensions of your ceiling.
-------	---




Updated	November 6, 2025
---------	------------------

Front View

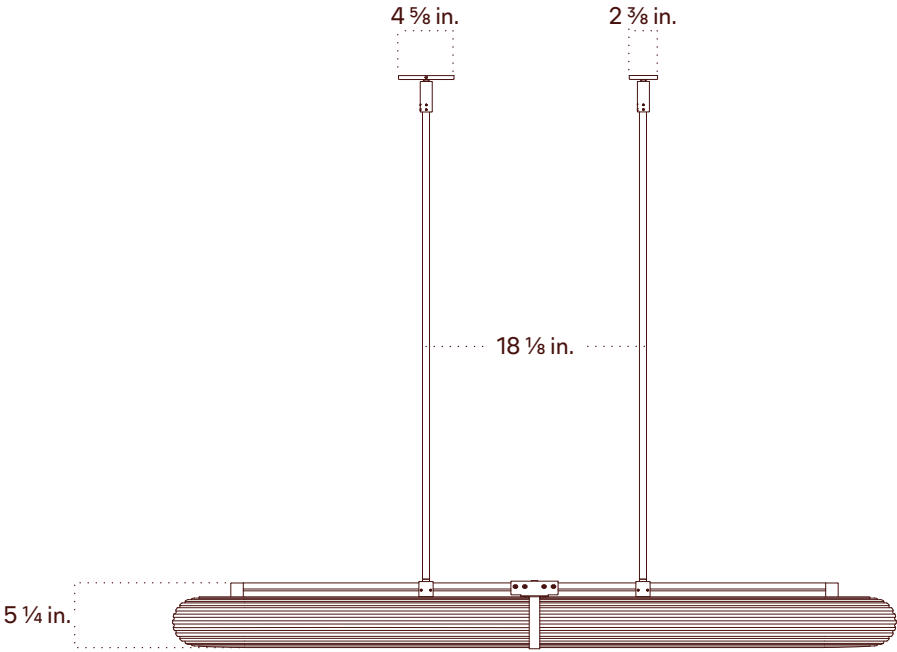


Bottom View

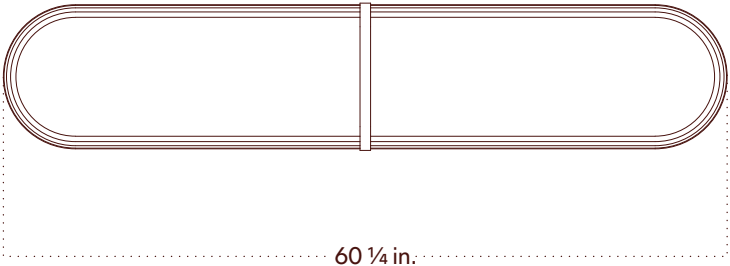

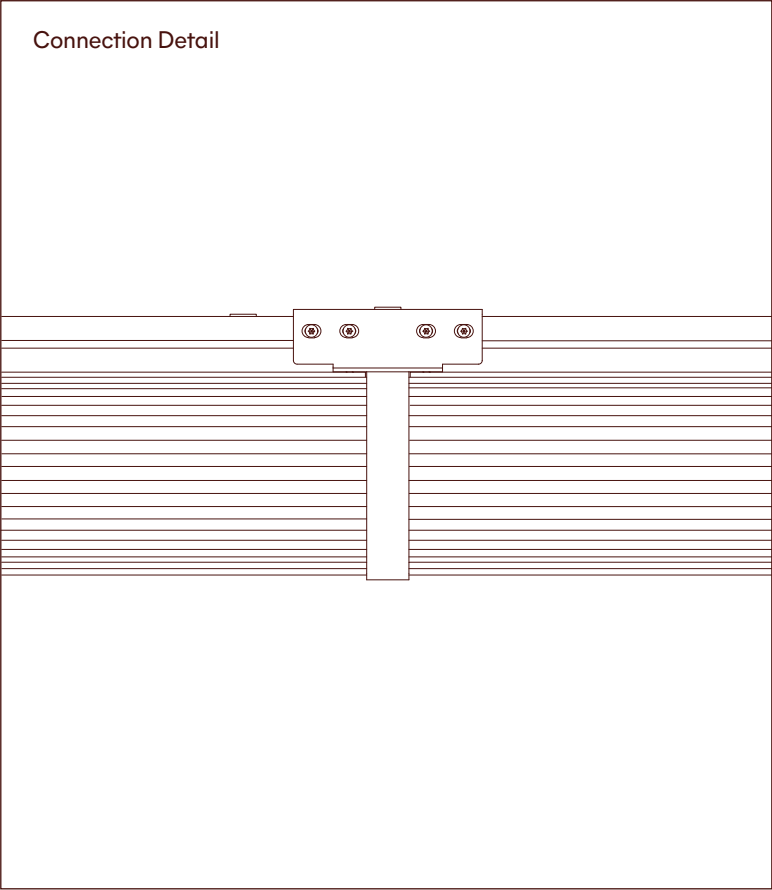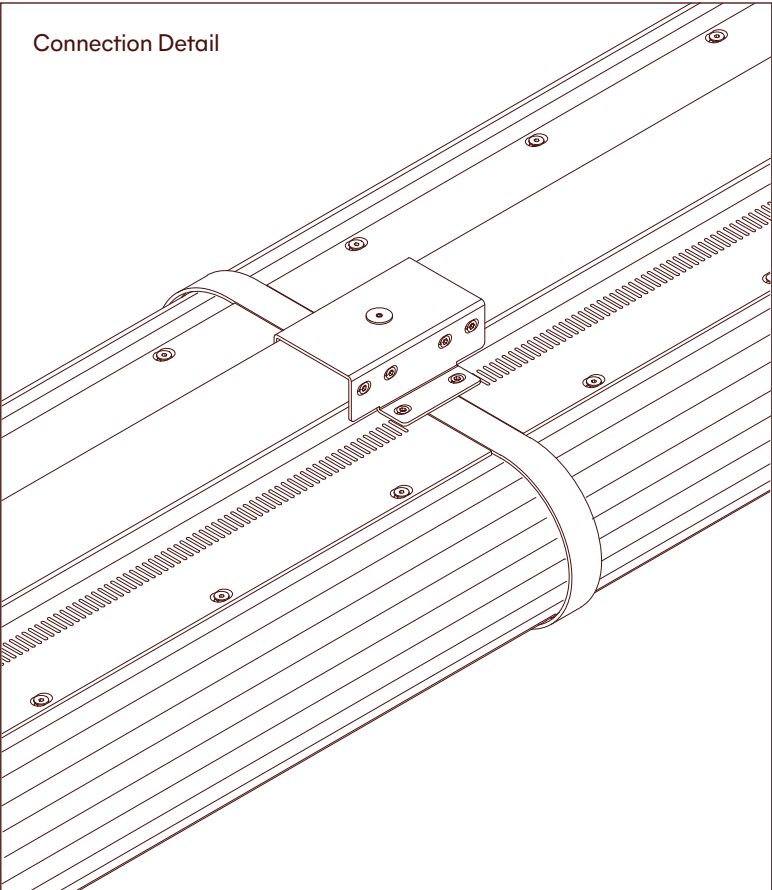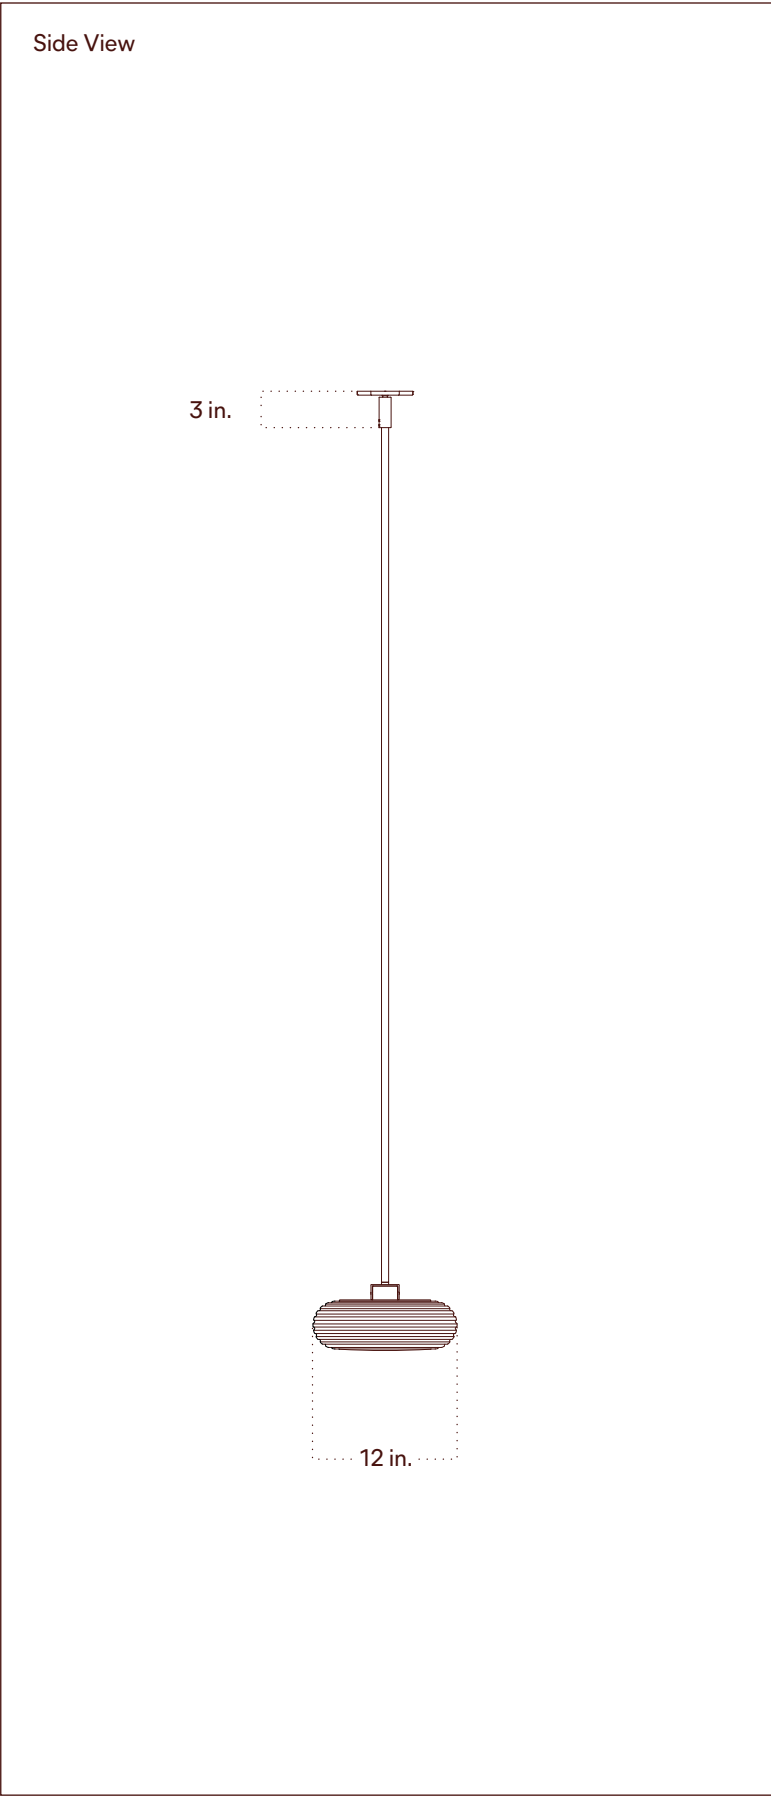

Isometric View

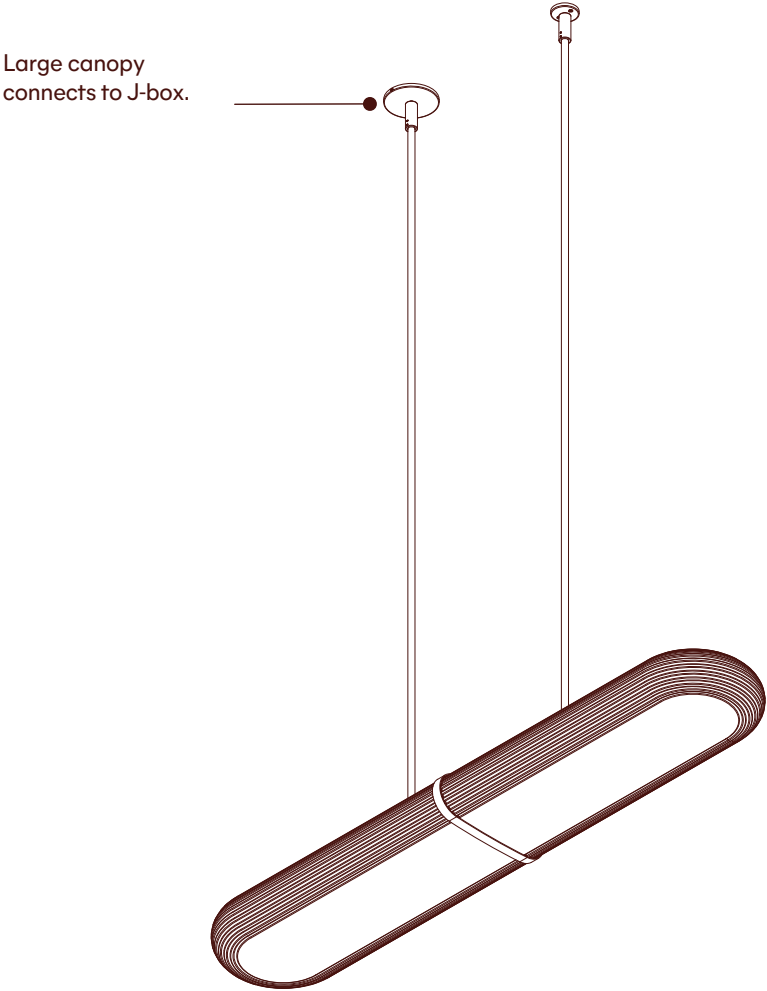

Saga Pendant, Trio




Technical Specifications	Materials	Aluminum, LDPE
	Product weight	29 lbs
	Lead time	3 days
	Integrated LED	6,975 lm / 1800 K – 3000 K / 97.9 W / 95+ CRI / warm on dim
	Input Voltage	120 V, 240 V, or 277 V
	Dimmer	TRIAC, ELV, or 0–10V
	Certifications	cETLus listed, damp-rated




Notes	1. The standard overall length of the fixture is 82.5 inches, which is included in the price. If additional length is required, it is priced per 6-foot increment. 2. The fixture’s minimum overall height is 15 inches. The fixture’s maximum OAH is 82.5 inches without a seam. For installations requiring additional height, stems can be added to extend the fixture. With additional stems, the maximum OAH reaches 224 inches, with the seam positioned at 72 inches. 3. Stems for the fixture are adjustable and can be cut on-site by the installer to fit the precise height requirements of the installation. A pipe cutter is provided with the fixture to ensure clean, accurate cuts. 4. The fixture utilizes high-performance LED technology with a lifetime of 50,000 hours. 5. The LED driver is integrated within the fixture, simplifying installation. Only the larger canopy (provided with the fixture) requires a connection to a junction box. 6. If installing the fixture on a sloped ceiling, customization options are available. Please inquire for specific adjustments to ensure the fixture meets the unique angles and dimensions of your ceiling.
-------	---




Updated	November 6, 2025
---------	------------------

Front View

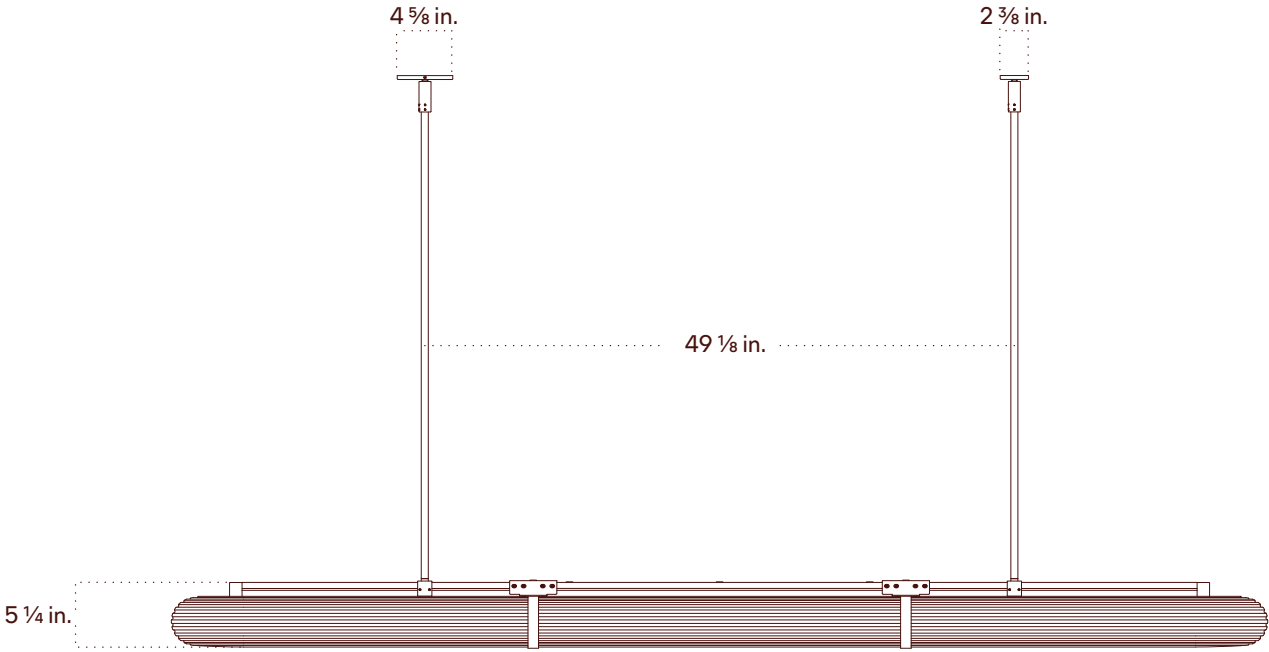


Bottom View

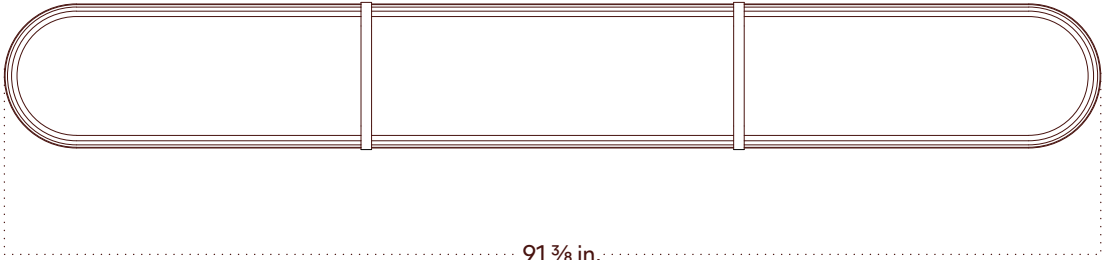

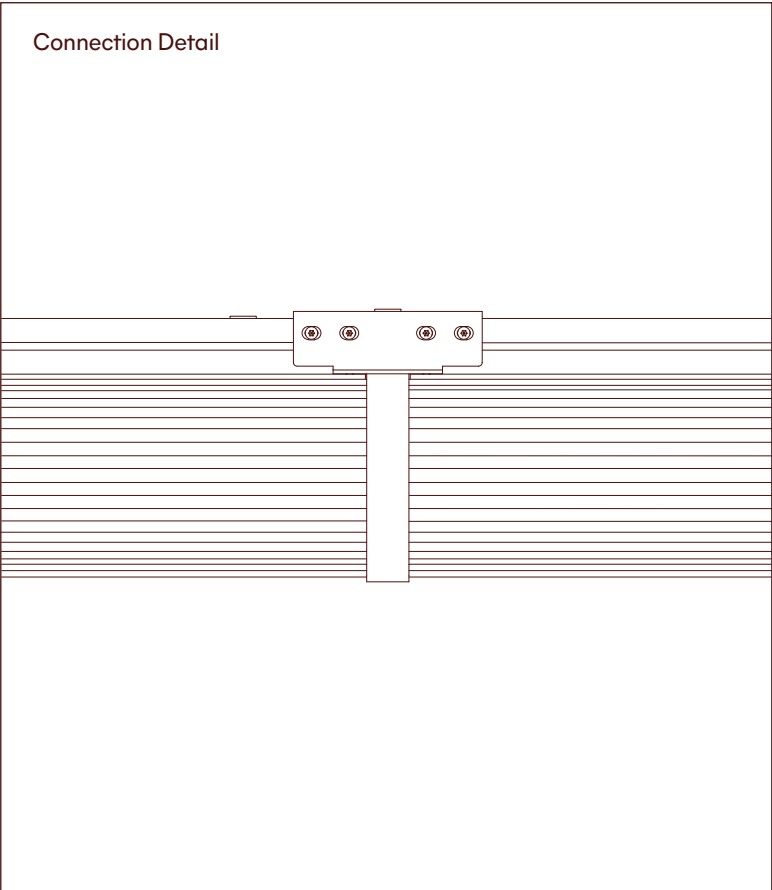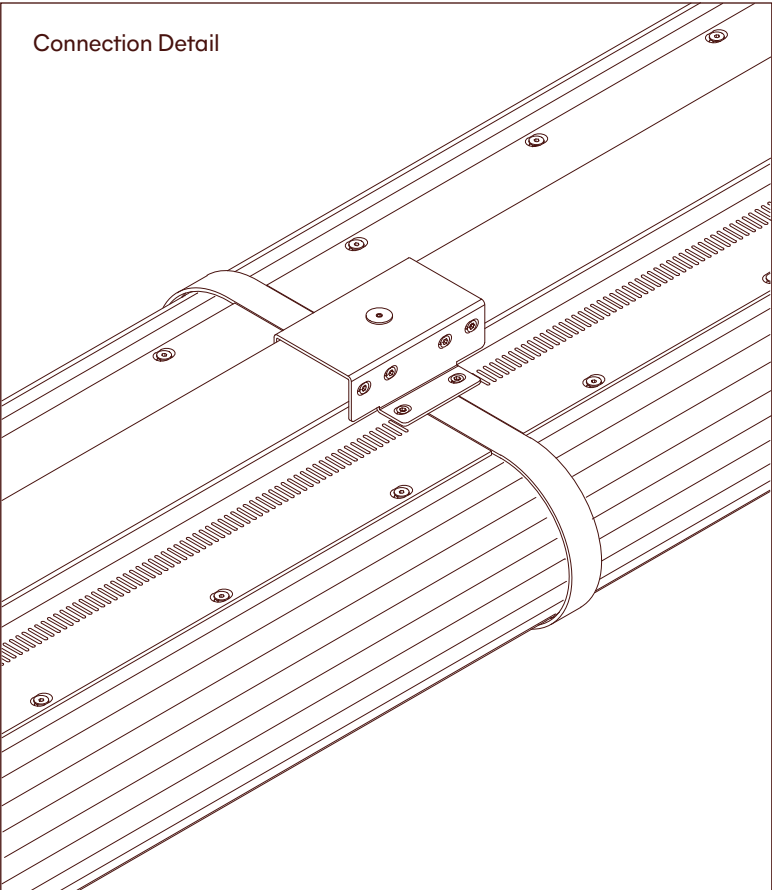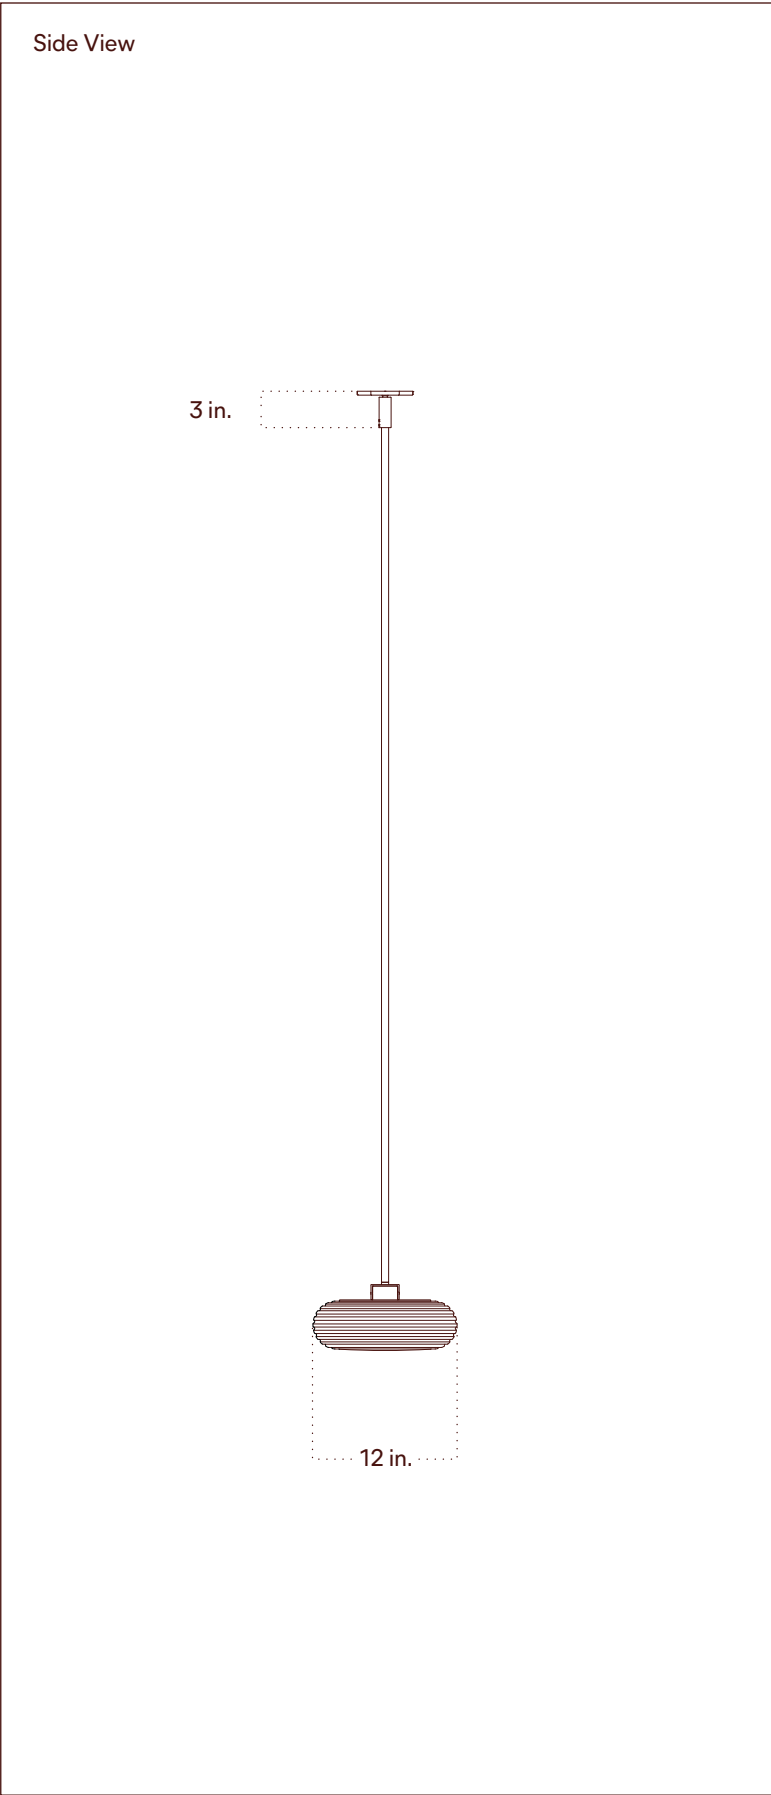

Isometric View


Large canopy
connects to J-box.

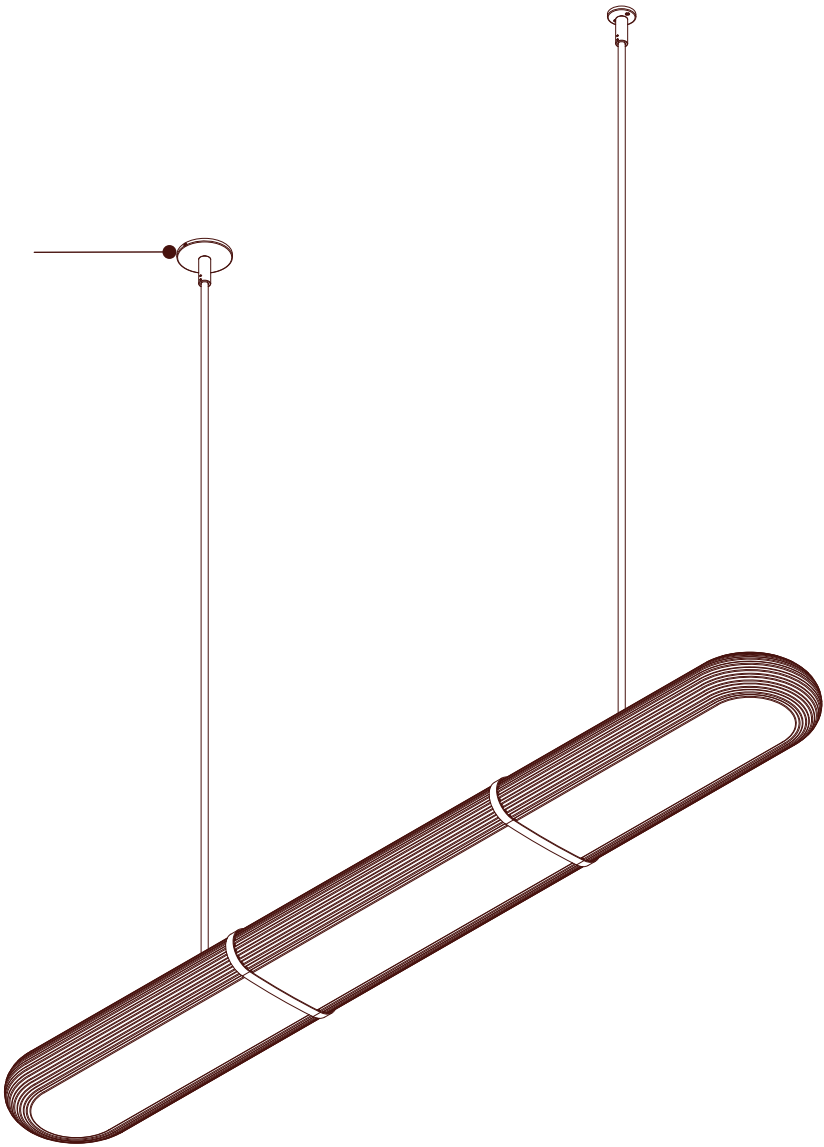

Finish Options

Brass, glass, and ceramic samples made or finished by hand may exhibit variability. Available for purchase at incommonwith.com/finishes.

Painted Metal

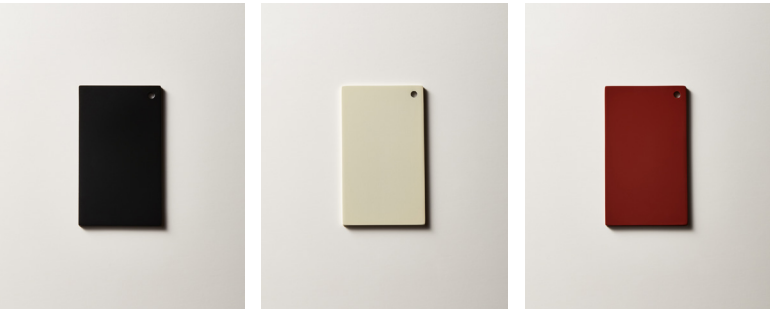

Black Bone Brick

Diffuser



LDPE