



Strata Surface Mount, Small




Technical Specifications	Materials	Glass, Brass-plated steel
	Product weight	2.5 lbs
	Lead time	12 weeks
	Integrated LED	998 lm / 2700K / 10.5 W / 92+ CRI
	Input Voltage	120 V, 240 V or 277 V
	Dimmer	TRIAC, ELV or 0-10 V
	Certifications	cULus listed, cETLus listed, IP44-rated, ADA compliant
		   


Notes	1. This fixture can be installed on a wall or ceiling. 2. This fixture has handmade elements and may exhibit variability within the same piece. These variations are inherent in the production process and are not to be considered as defects. We do our best to maintain a consistent product while honoring handmade craftsmanship. 3. Dimensions may vary within half an inch. 4. The LED lifetime is 50,000 hours. 5. The driver, (class 2 power unit) is included within the fixture. 6. This fixture is designed so the LED board can be replaced when it reaches its lifetime. 7. This fixture meets the requirements of the Americans with Disabilities Act (ADA) of 1990.
-------	--

Updated	May 29, 2026
---------	--------------


Front View

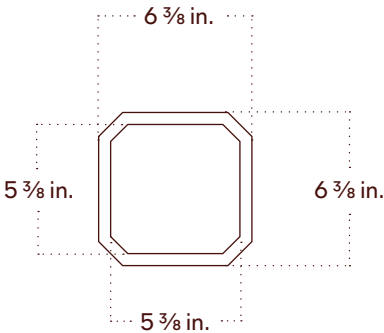


Side View



Front View: Ceiling Installation



Isometric View







Strata Surface Mount, Small, Plug-in




Technical Specifications	Materials	Glass, Brass-plated steel
	Product weight	2.5 lbs
	Lead time	12 weeks
	Integrated LED	998 lm / 2700K / 10.5 W / 92+ CRI
	Input Voltage	120 V
	Dimmer	Integrated dimmer switch
	Certifications	cULus listed, cETLus listed
		 

Notes	1. This fixture comes with a 16-foot chocolate brown fabric cord. The dimmer switch is our black painted metal finish and is located 8 feet from the plug. 2. This fixture has handmade elements and may exhibit variability within the same piece. These variations are inherent in the production process and are not to be considered as defects. We do our best to maintain a consistent product while honoring handmade craftsmanship. 3. Dimensions may vary within half an inch. 4. The LED lifetime is 50,000 hours. 5. The driver, (class 2 power unit) is included within the fixture. 6. This fixture is designed so the LED board can be replaced when it reaches its lifetime.
-------	---


Updated	May 29, 2026
---------	--------------

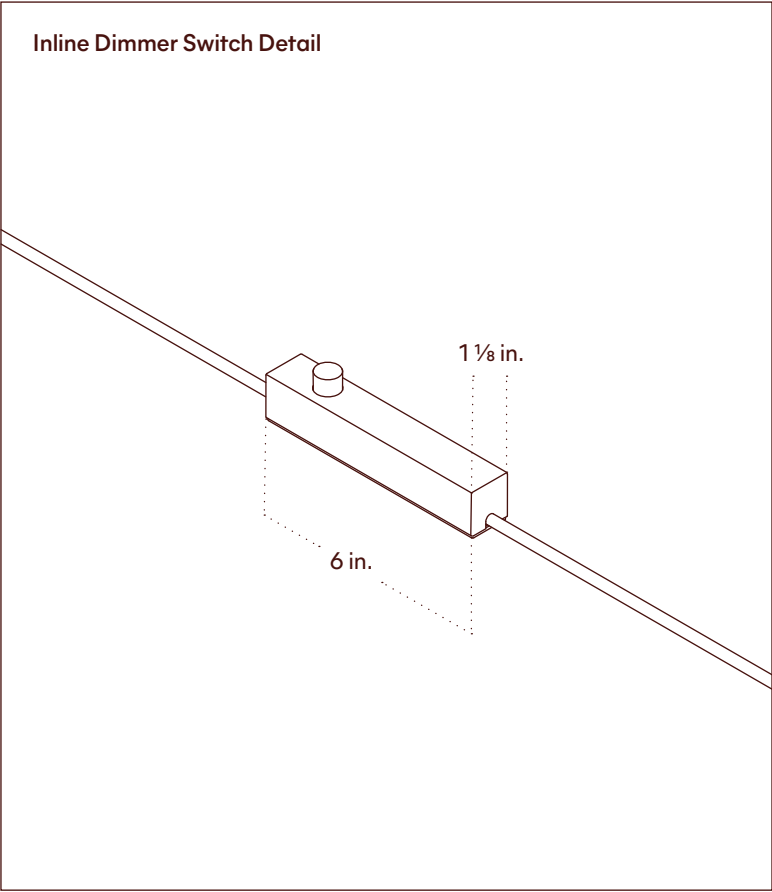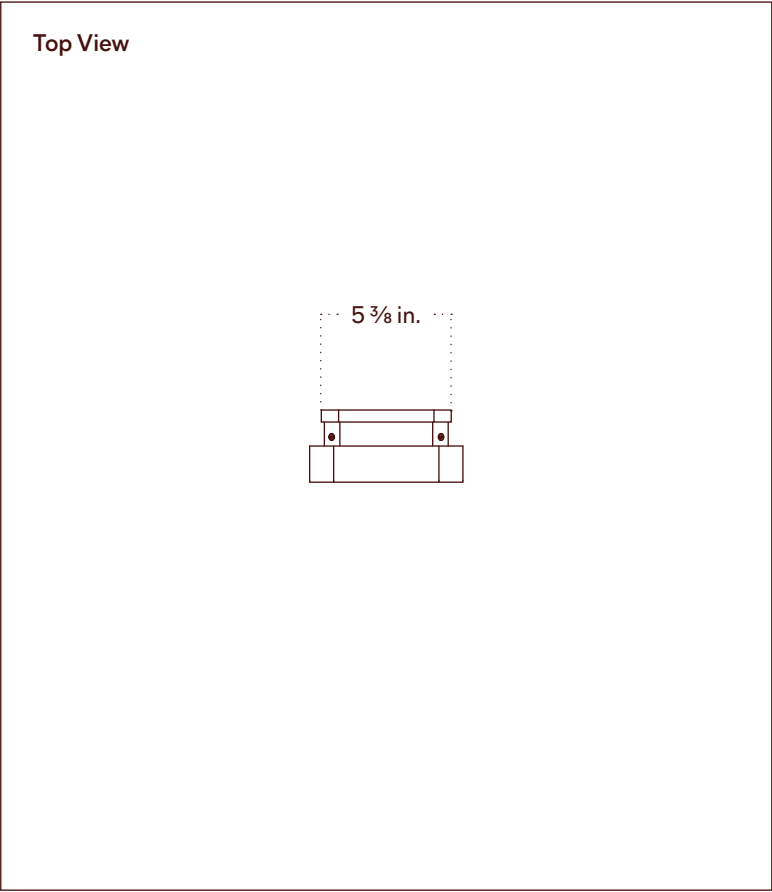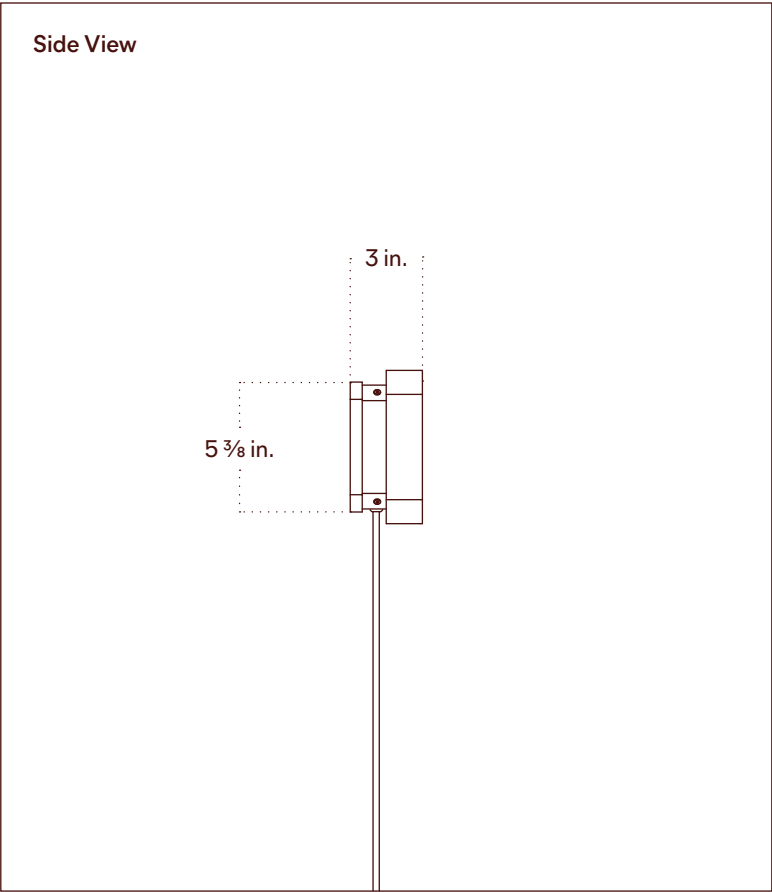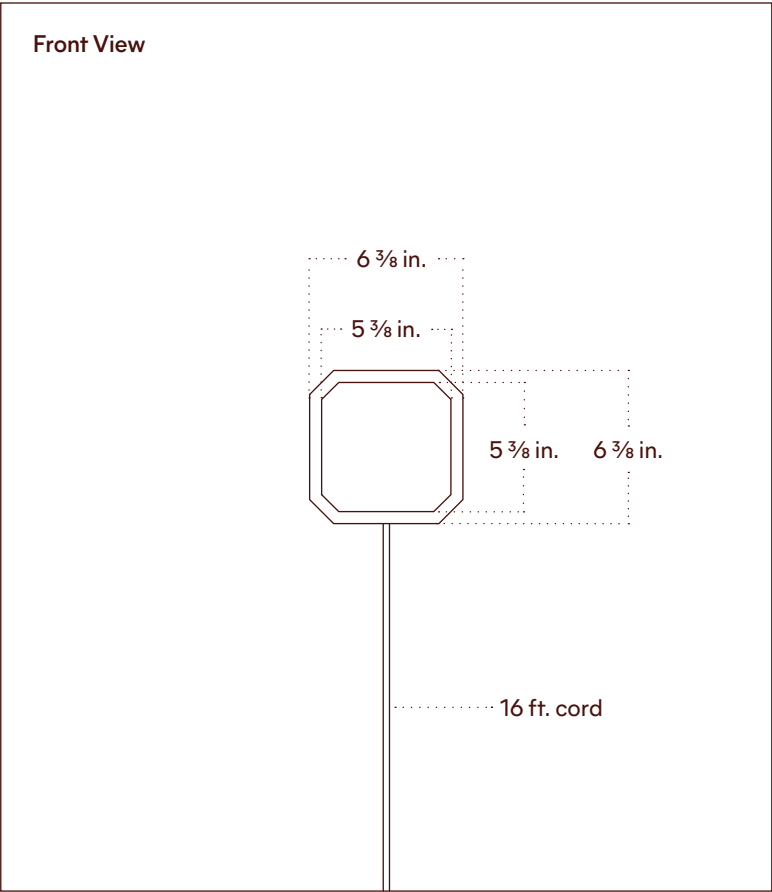


Front View




Solid




Powder



Stripe



Patchwork



Mosaic

Strata Surface Mount, Large




Technical Specifications	Materials	Glass, Brass-plated steel
	Product weight	55 lbs
	Lead time	18 weeks
	Integrated LED	11,592 lm / 2700K / 126W /92+CRI
	Input Voltage	120 V, 240 V or 277 V
	Dimmer	TRIAC, ELV or 0-10 V
	Certifications	cULus listed, cETLus listed, damp rated
		 


Notes	1. This fixture can be installed on a wall or ceiling. 2. Universal canopy mounting is located at the center of the fixture. Additional anchor holes are available for added support. 3. This fixture has handmade elements and may exhibit variability within the same piece. These variations are inherent in the production process and are not to be considered as defects. We do our best to maintain a consistent product while honoring handmade craftsmanship. 4. Dimensions may vary within half an inch. 5. The LED lifetime is 50,000 hours. 6. The driver, (class 2 power unit) is included within the fixture. 7. This fixture is designed so the LED board can be replaced when it reaches its lifetime.
-------	--

Updated	May 29, 2026
---------	--------------


Front View

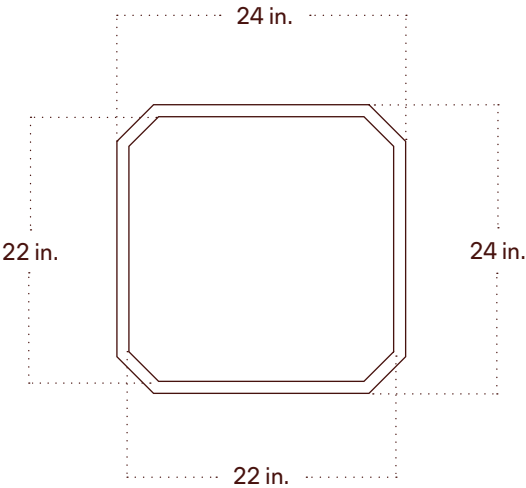


Side View

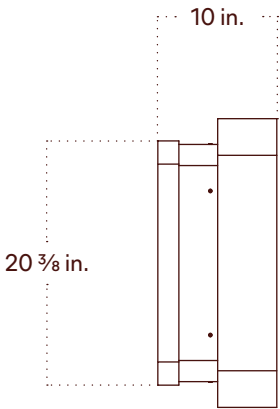

Front View: Ceiling Installation



Isometric View

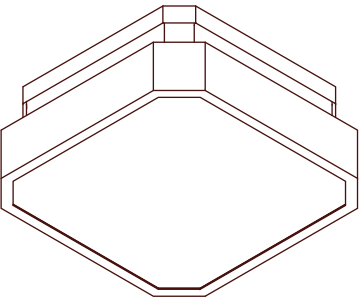





Strata Surface Mount, Large, Plug-in




Technical Specifications	Materials	Glass, Brass-plated steel
	Product weight	55 lbs
	Lead time	18 weeks
	Integrated LED	11,592 lm / 2700K / 126W / 92+CRI
	Input Voltage	120 V
	Dimmer	Integrated dimmer switch
	Certifications	cULus listed, cETLus listed
		 

Notes	1. This fixture comes with a 16-foot chocolate brown fabric cord. The dimmer switch is our black painted metal finish and is located 8 feet from the plug. 2. This fixture has handmade elements and may exhibit variability within the same piece. These variations are inherent in the production process and are not to be considered as defects. We do our best to maintain a consistent product while honoring handmade craftsmanship. 3. Dimensions may vary within half an inch. 4. The LED lifetime is 50,000 hours. 5. The driver, (class 2 power unit) is included within the fixture. 6. This fixture is designed so the LED board can be replaced when it reaches its lifetime.
-------	---


Updated	May 29, 2026
---------	--------------

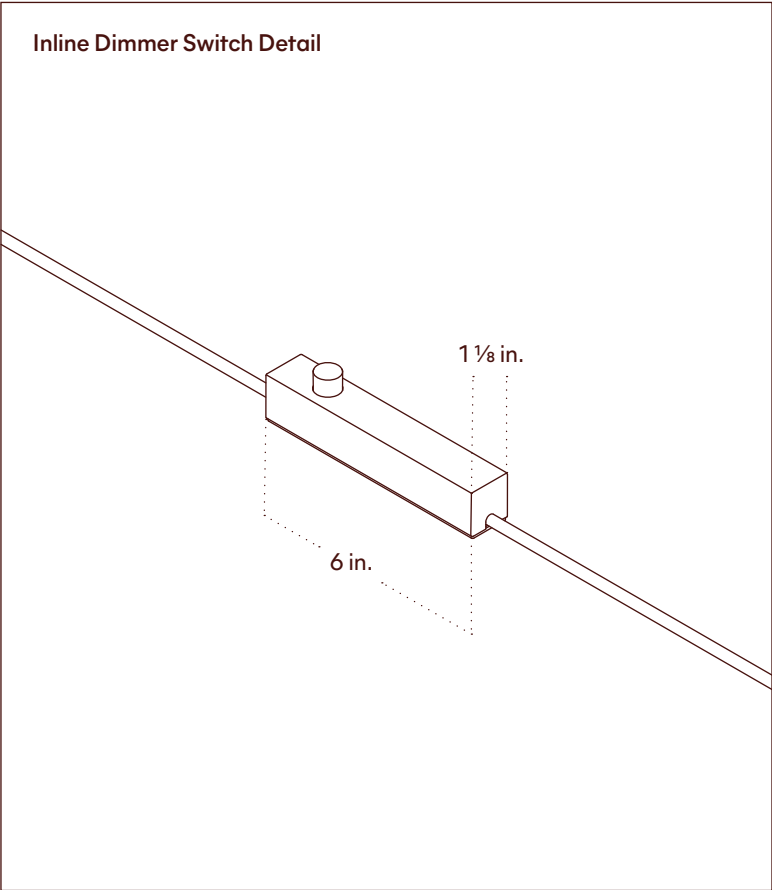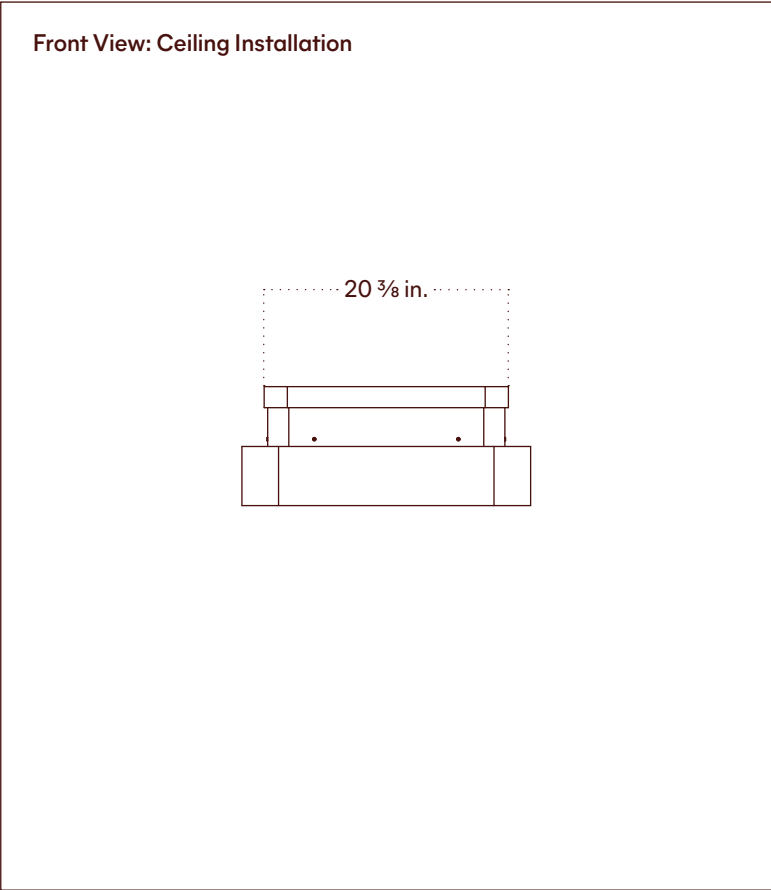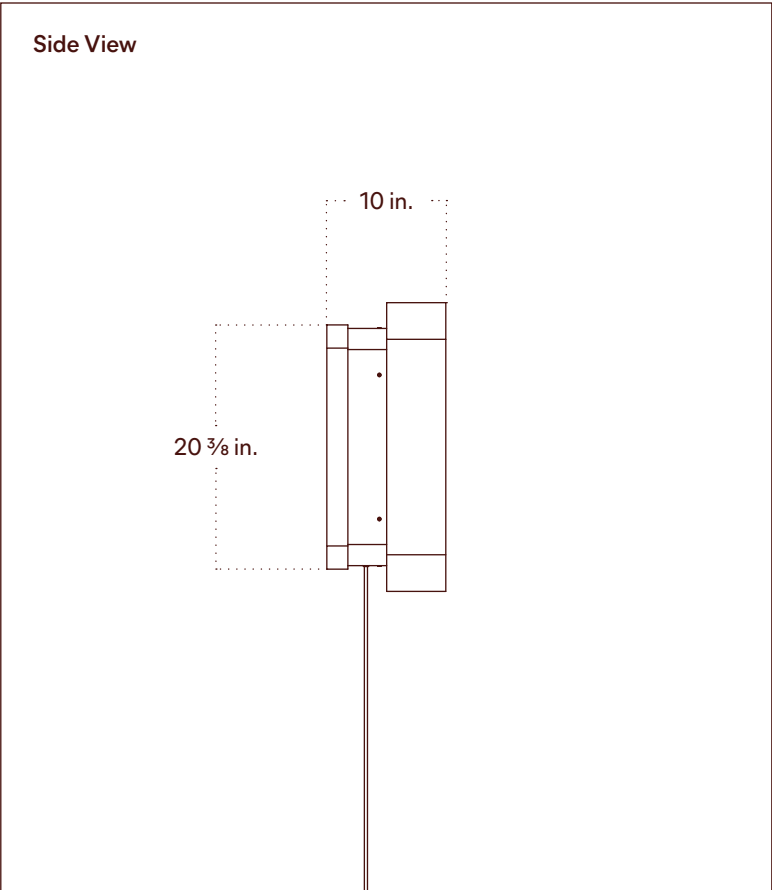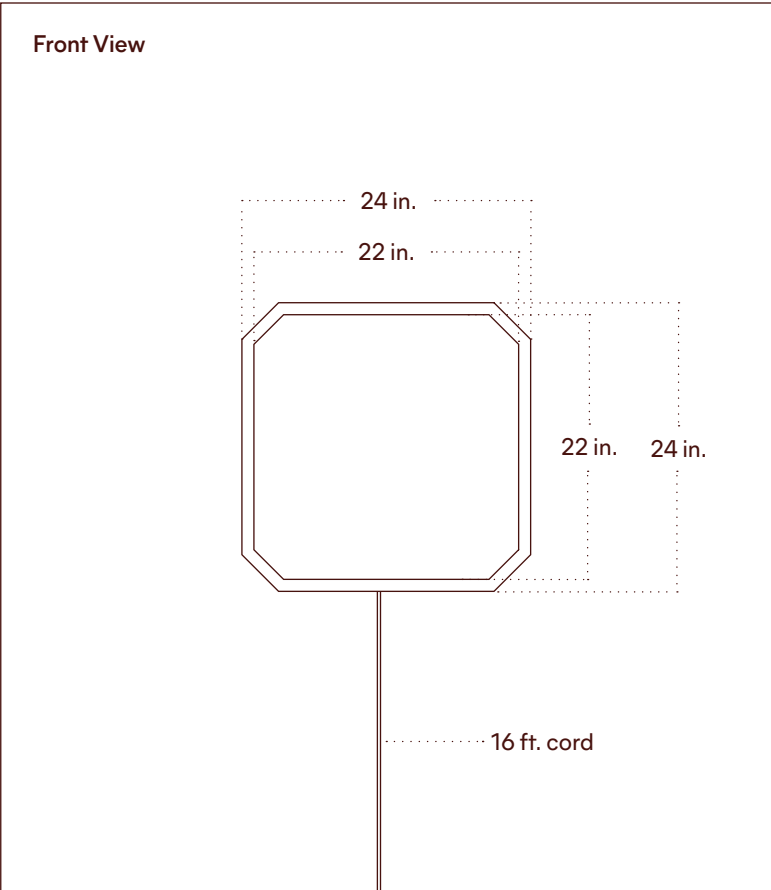


Front View




Powder



Field



Patchwork




Mosaic

Finish Options


Brass, glass, and ceramic samples made or finished by hand may exhibit variability. Available for purchase at incommonwith.com/finishes.

Solid Glass

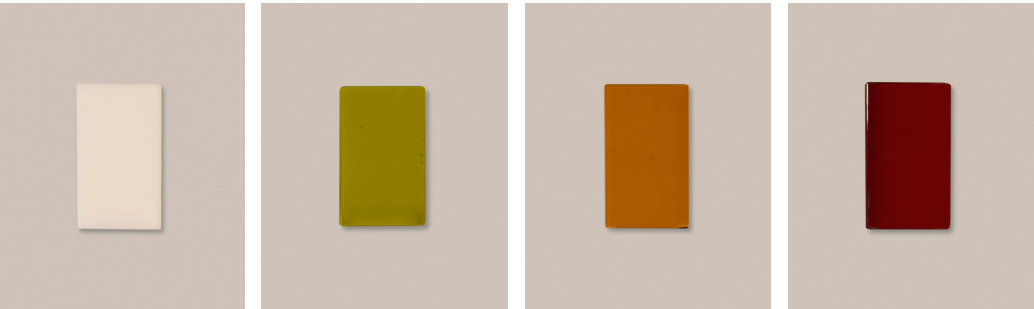


Almond Olive Pecan Cherry

Powder Glass

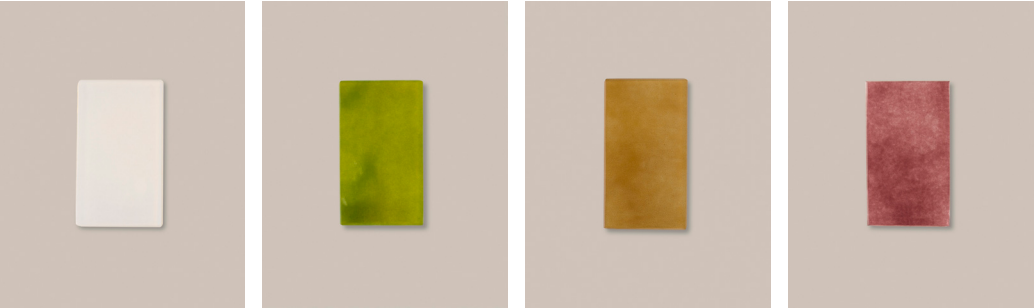

Cirrus Moss Umber Plum

Striped Glass

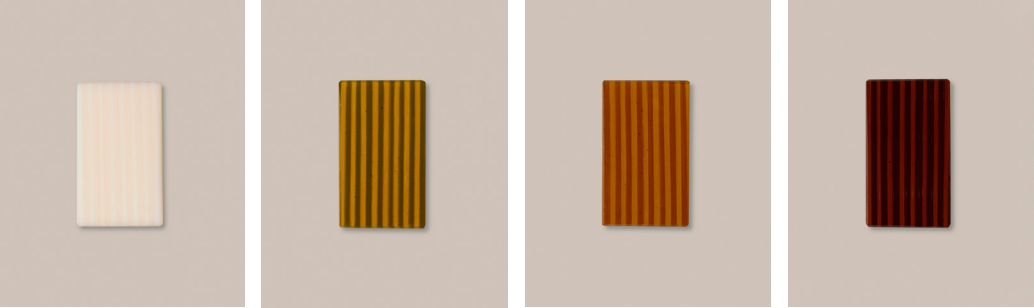

Vellum Zinnia Marigold Garnet

Finish Options

Brass, glass, and ceramic samples made or finished by hand may exhibit variability. Available for purchase at incommonwith.com/finishes.

Patterned Glass



Alba Algae Harvest Canyon

Brass



Brass Patina Brass Blackened Brass Pewter