



Up Down Sconce




Technical Specifications	Materials	Steel / Brass
	Product weight	1.5 lbs
	Lead time	Painted Metal: 2 weeks Painted Metal / Brass: 4 weeks
	Bulbs included (2)	E12 / 120 V / 4.0 W / 220 lm 2200 K - 3000 K / warm on dim
	Dimmer	TRIAC
	Max wattage	20 W
	Certifications	cULus listed, cETLus listed, damp-rated
		  


Notes	1.	This fixture may be installed horizontally if desired (hardwire version without a dimmer switch only).
	2.	This fixture can be specified with a rotary dimmer switch installed on its base. The dimmer switch can be located on either the left or right side of the shades.

Updated	November 18, 2025
---------	-------------------


Front View

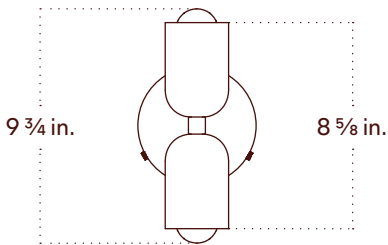


Side View



Top View



Isometric View



Up Down Sconce, Left Switch




Technical Specifications	Materials	Steel / Brass
	Product weight	1.5 lbs
	Lead time	Painted Metal: 2 weeks Painted Metal / Brass: 4 weeks
	Bulbs included (2)	E12 / 120 V / 4.0 W / 220 lm 2200 K - 3000 K / warm on dim
	Dimmer	TRIAC
	Max wattage	20 W
	Certifications	cULus listed, cETLus listed, damp-rated
		  


Notes	1. This fixture can be specified with a rotary dimmer switch installed on its base. The dimmer switch can be located on either the left or right side of the shades.
-------	---

Updated	November 18, 2025
---------	-------------------


Front View

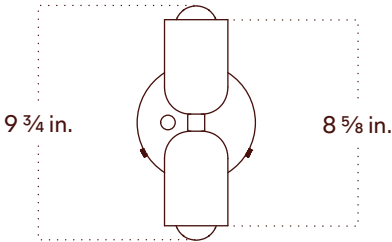


Side View



Top View



Isometric View



Up Down Sconce, Right Switch




Technical Specifications	Materials	Steel / Brass
	Product weight	1.5 lbs
	Lead time	Painted Metal: 2 weeks Painted Metal / Brass: 4 weeks
	Bulbs included (2)	E12 / 120 V / 4.0 W / 220 lm 2200 K - 3000 K / warm on dim
	Dimmer	TRIAC
	Max wattage	20 W
	Certifications	cULus listed, cETLus listed, damp-rated   


Notes	1. This fixture can be specified with a rotary dimmer switch installed on its base. The dimmer switch can be located on either the left or right side of the shades.
-------	---

Updated	November 18, 2025
---------	-------------------


Front View

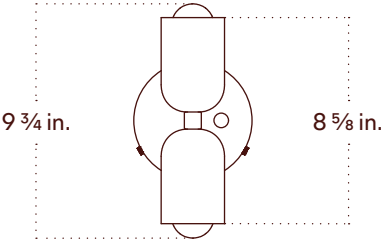


Side View



Top View



Isometric View



Up Down Sconce, Plug-in




Technical Specifications	Materials	Steel / Brass
	Product weight	2 lbs
	Lead time	Painted Metal: 2 weeks Painted Metal / Brass: 4 weeks
	Bulbs included (2)	E12 / 120 V / 4.0 W / 220 lm 2200 K - 3000 K / warm on dim
	Dimmer	Inline dimmer switch
	Cord Length	16 ft
	Max wattage	20 W
	Certifications	cULus listed, cETLus listed  


Notes	1.	The plug-in version of this fixture will be supplied with a Porcelain I E12 / 110v / 3.0 W / 180 lm / 2700 K bulb.
	2.	Fixtures ordered in painted metal with an inline dimmer have a 16-foot black fabric cord. The dimmer switch is our black painted metal finish and is located 8 feet from the plug.
	3.	Custom cord color can be specified for an additional cost; please inquire.

Updated	November 18, 2025
---------	-------------------


Front View

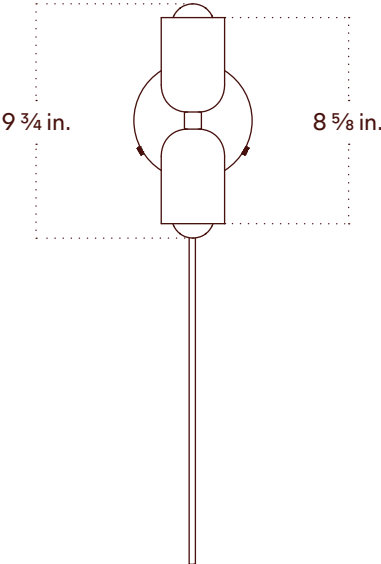


Side View

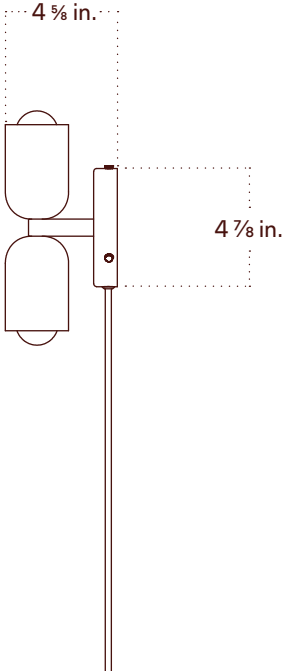

Top View



Inline Dimmer Switch Detail

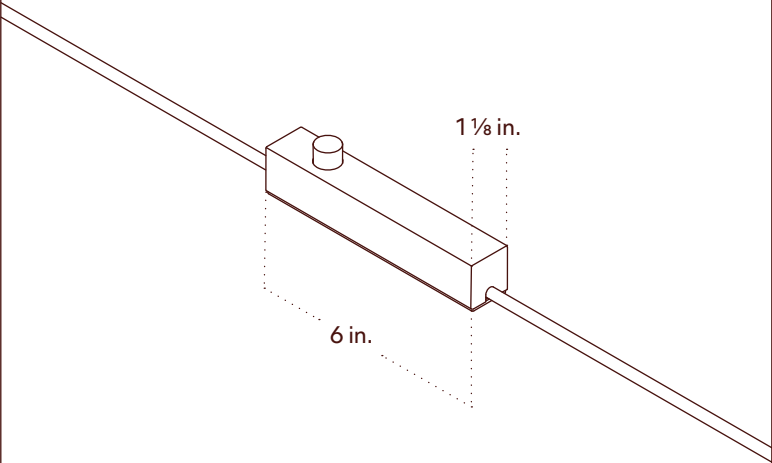

Up Down Sconce, Plug-in Left Switch




Technical Specifications	Materials	Steel / Brass
	Product weight	2 lbs
	Lead time	Painted Metal: 2 weeks Painted Metal / Brass: 4 weeks
	Bulbs included (2)	E12 / 120 V / 4.0 W / 220 lm 2200 K - 3000 K / warm on dim
	Dimmer	Integrated dimmer switch
	Cord Length	10 ft
	Max wattage	20 W
	Certifications	cULus listed, cETLus listed  


Notes	1.	Fixtures ordered in painted metal will come with a 10-foot black fabric cord.
	2.	Fixtures ordered in brass finishes will come with a 10-foot chocolate brown fabric cord.
	3.	Custom cord color can be specified for an additional cost; please inquire.
	4.	This fixture can be specified with a rotary dimmer switch installed on its base. The dimmer switch can be located on either the left or right side of the shades.

Updated	November 18, 2025
---------	-------------------


Front View

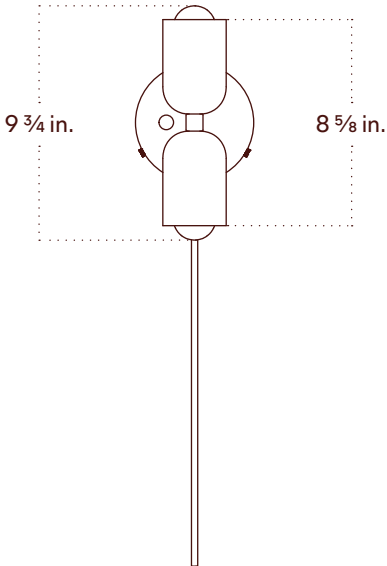


Side View



Top View



Isometric View



Up Down Sconce, Plug-in Right Switch




Technical Specifications	Materials	Steel / Brass
	Product weight	2 lbs
	Lead time	Painted Metal: 2 weeks Painted Metal / Brass: 4 weeks
	Bulbs included (2)	E12 / 120 V / 4.0 W / 220 lm 2200 K - 3000 K / warm on dim
	Dimmer	Integrated dimmer switch
	Cord Length	10 ft
	Max wattage	20 W
	Certifications	cULus listed, cETLus listed  


Notes	1.	Fixtures ordered in painted metal will come with a 10-foot black fabric cord.
	2.	Fixtures ordered in brass finishes will come with a 10-foot chocolate brown fabric cord.
	3.	Custom cord color can be specified for an additional cost; please inquire.
	4.	This fixture can be specified with a rotary dimmer switch installed on its base. The dimmer switch can be located on either the left or right side of the shades.
	5.	
	6.	This fixture meets the requirements of the Americans with Disabilities Act (ADA) of 1990.
	7.	This fixture may be installed horizontally if desired.

Updated	November 18, 2025
---------	-------------------


Front View

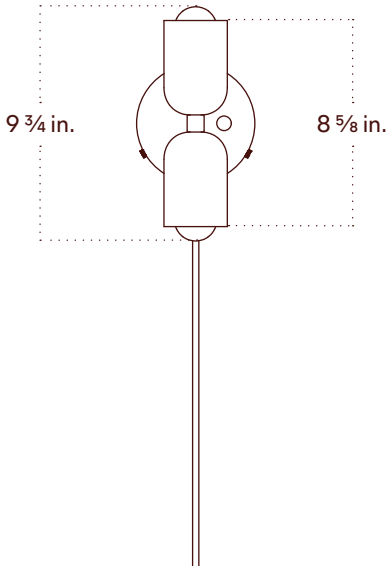


Side View



Top View



Isometric View



Up Down Sconce, Slim




Technical Specifications	Materials	Steel / Brass
	Product weight	1.5 lbs
	Lead time	Painted Metal: 2 weeks Painted Metal / Brass: 4 weeks
	Bulbs included (2)	E12 / 120 V / 4.0 W / 220 lm 2200 K - 3000 K / warm on dim
	Dimmer	TRIAC
	Max wattage	20 W
	Certifications	cULus listed, cETLus listed, damp-rated, ADA compliant
		   


Notes	1. This fixture meets the requirements of the Americans with Disabilities Act (ADA) of 1990.
	2. This fixture may be installed horizontally if desired.

Updated	November 18, 2025
---------	-------------------


Front View

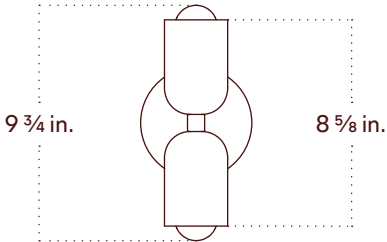


Side View



Top View



Isometric View



Brass Up Down Sconce




Technical Specifications	Materials	Brass
	Product weight	1.5 lbs
	Lead time	4 weeks
	Bulbs included (2)	E12 / 120 V / 4.0 W / 220 lm 2200 K - 3000 K / warm on dim
	Dimmer	TRIAC
	Max wattage	20 W
	Certifications	cULus listed, cETLus listed, damp-rated
		  


Notes	1. This fixture may be installed horizontally if desired (hardwire version without a dimmer switch only).
-------	---

Updated	November 18, 2025
---------	-------------------


Front View

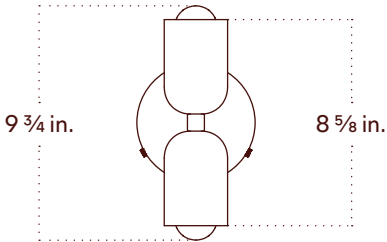


Side View



Top View



Isometric View



Brass Up Down Sconce, Left Switch




Technical Specifications	Materials	Brass
	Product weight	1.5 lbs
	Lead time	4 weeks
	Bulbs included (2)	E12 / 120 V / 4.0 W / 220 lm 2200 K - 3000 K / warm on dim
	Dimmer	Integrated dimmer switch
	Max wattage	20 W
	Certifications	cULus listed, cETLus listed, damp-rated
		  


Notes	1. This fixture can be specified with a rotary dimmer switch installed on its base. The dimmer switch can be located on either the left or right side of the shades.
-------	---

Updated	November 18, 2025
---------	-------------------


Front View

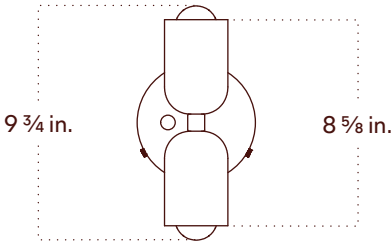


Side View



Top View



Isometric View



Brass Up Down Sconce, Right Switch




Technical Specifications	Materials	Brass
	Product weight	1.5 lbs
	Lead time	4 weeks
	Bulbs included (2)	E12 / 120 V / 4.0 W / 220 lm 2200 K - 3000 K / warm on dim
	Dimmer	Integrated dimmer switch
	Max wattage	20 W
	Certifications	cULus listed, cETLus listed, damp-rated
		  


Notes	1. This fixture can be specified with a rotary dimmer switch installed on its base. The dimmer switch can be located on either the left or right side of the shades.
-------	---

Updated	November 18, 2025
---------	-------------------


Front View

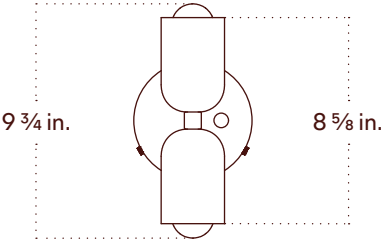


Side View



Top View



Isometric View



Brass Up Down Sconce, Plug-in




Technical Specifications	Materials	Brass
	Product weight	2 lbs
	Lead time	4 weeks
	Bulbs included (2)	E12 / 120 V / 4.0 W / 220 lm 2200 K - 3000 K / warm on dim
	Dimmer	In-line dimmer switch
	Cord Length	16 ft
	Max wattage	20 W
	Certifications	cULus listed, cETLus listed
		 


Notes	1.	The plug-in version of this fixture will be supplied with a Porcelain I E12 / 110v / 3.0 W / 180 lm / 2700 K bulb.
	2.	Fixtures ordered in brass finishes with an inline dimmer have a 16-foot chocolate brown fabric cord. The dimmer switch is our black painted metal finish and is located 8 feet from the plug.
	3.	Custom cord color can be specified for an additional cost; please inquire.

Updated	November 18, 2025
---------	-------------------


Front View

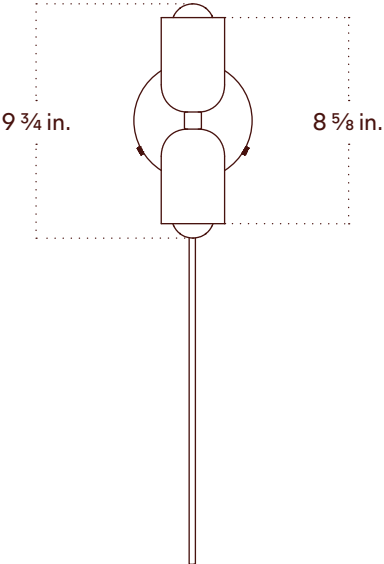


Side View

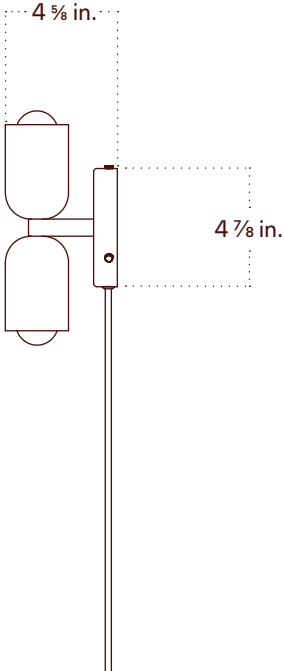

Top View



Inline Dimmer Switch Detail

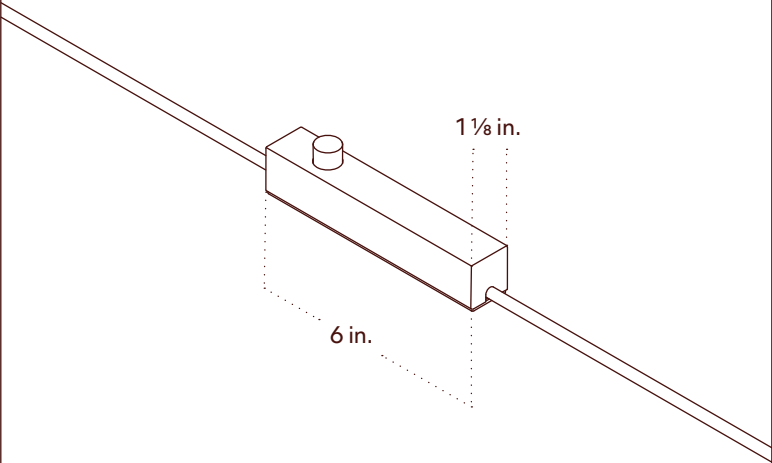

Brass Up Down Sconce, Plug-in Left Switch




Technical Specifications	Materials	Brass
	Product weight	2 lbs
	Lead time	4 weeks
	Bulbs included (2)	E12 / 120 V / 4.0 W / 220 lm 2200 K - 3000 K / warm on dim
	Dimmer	Integrated dimmer switch
	Cord Length	10 ft
	Max wattage	20 W
	Certifications	cULus listed, cETLus listed
		 


Notes	1. The plug-in version of this fixture with an inline on/off switch will be supplied with a Porcelain I E12 / 110v / 3.0 W / 180 lm / 2700 K bulb. 2. This fixture comes with a 10 foot chocolate brown fabric cord. 3. Custom cord color can be specified for an additional cost; please inquire. 4. This fixture can be specified with a rotary dimmer switch installed on its base. The dimmer switch can be located on either the left or right side of the shades.
-------	---

Updated	November 18, 2025
---------	-------------------


Front View

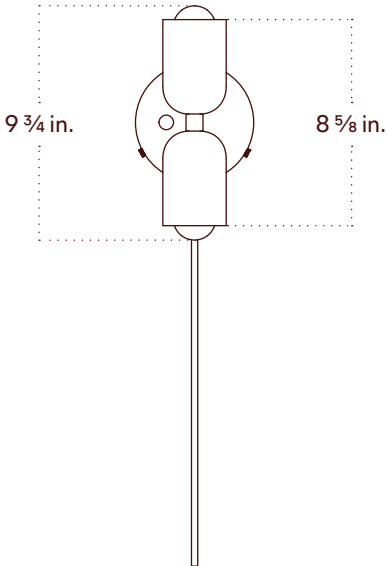


Side View



Top View



Isometric View



Brass Up Down Sconce, Plug-in Right Switch




Technical Specifications	Materials	Brass
	Product weight	2 lbs
	Lead time	4 weeks
	Bulbs included (2)	E12 / 120 V / 4.0 W / 220 lm 2200 K - 3000 K / warm on dim
	Dimmer	Integrated dimmer switch
	Cord Length	10 ft
	Max wattage	20 W
	Certifications	cULus listed, cETLus listed
		 


Notes	1.	The plug-in version of this fixture with an inline on/off switch will be supplied with a Porcelain I E12 / 110v / 3.0 W / 180 lm / 2700 K bulb.
	2.	This fixture comes with a 10 foot chocolate brown fabric cord.
	3.	Custom cord color can be specified for an additional cost; please inquire.
	4.	This fixture can be specified with a rotary dimmer switch installed on its base. The dimmer switch can be located on either the left or right side of the shades.

Updated	November 18, 2025
---------	-------------------


Front View

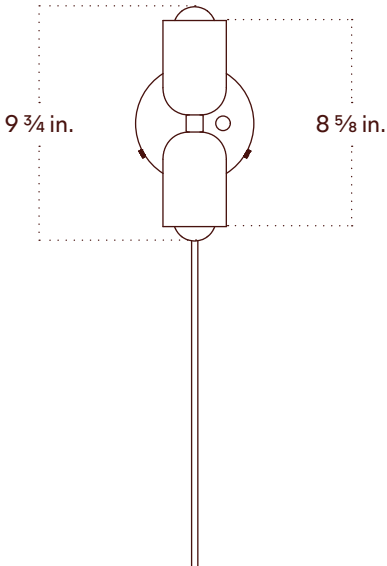


Side View



Top View



Isometric View



Brass Up Down Sconce, Slim




Technical Specifications	Materials	Brass
	Product weight	1.5 lbs
	Lead time	4 weeks
	Bulbs included (2)	E12 / 120 V / 4.0 W / 220 lm 2200 K - 3000 K / warm on dim
	Dimmer	TRIAC
	Max wattage	20 W
	Certifications	cULus listed, cETLus listed, damp-rated, ADA compliant
		   


Notes	1. This fixture meets the requirements of the Americans with Disabilities Act (ADA) of 1990.
	2. This fixture may be installed horizontally if desired.

Updated	November 18, 2025
---------	-------------------


Front View

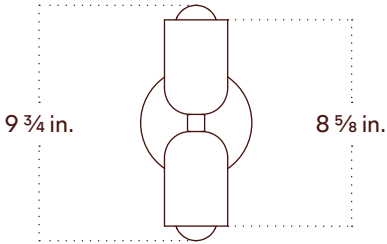


Side View



Top View



Isometric View



Finish Options

Brass, glass, and ceramic samples made or finished by hand may exhibit variability. Available for purchase at incommonwith.com/finishes.

Painted Metal



Black Bone Oxide Red Reed Green Peach

Brass



Brass Patina Brass Blackened Brass Pewter