In Common With

Verso Surface Mount

Technical Specifications
sales@incommonwith.com
+1 (917) 830-8700
incommonwith.com



Verso Surface Mount, Small



Technical Specifications

Materials	Glass, Brass–plated steel
Product weight	8 lbs
Lead time	12 weeks
Integrated LED	2,565 lm / 2700 K / 27 W / 92+ CRI
Input Voltage	120 V, 240 V or 277 V
Dimmer	TRIAC, ELV or 0–10 V
Certifications	cULus listed, cETLus listed, damp-rated, ADA compliant

Notes


1. This fixture can be installed on a wall or ceiling.
2. This fixture can be installed vertically or horizontally.
3. Designed for installation with a standard one-gang outlet box. Canopy mounting is located at the center of the fixture. Additional anchor holes are available for added support.
4. This fixture has handmade elements and may exhibit variability within the same piece. These variations are inherent in the production process and are not to be considered as defects. We do our best to maintain a consistent product while honoring handmade craftsmanship.
5. Dimensions may vary within half an inch.
6. The LED lifetime is 50,000 hours.
7. The driver, (class 2 power unit) is included within the fixture.
8. This fixture is designed so the LED board can be replaced when it reaches its lifetime.
9. This fixture meets the requirements of the Americans

Updated	November 18, 2025


Verso Surface Mount, Small

Technical Drawings


Front View

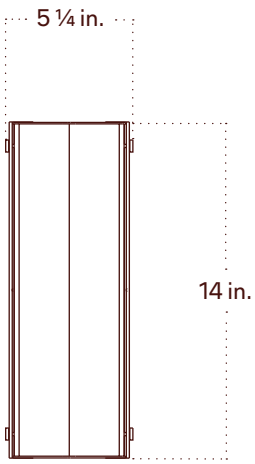


Side View




Top View



Isometric View



Verso Surface Mount, Small, Plug-in

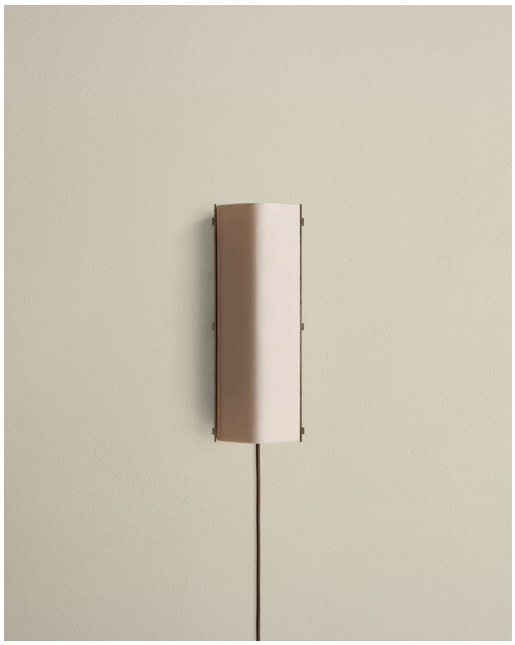

Technical Specifications

Materials	Glass, Brass–plated steel
Product weight	8 lbs
Lead time	12 weeks
Integrated LED	2,565 lm / 2700 K / 27 W / 92+ CRI
Input Voltage	120 V
Dimmer	Integrated dimmer switch
Certifications	cULus listed, cETLus listed

Notes

1. This fixture is installed vertically.
2. This fixture comes with a 16-foot chocolate brown fabric cord. The dimmer switch is our black painted metal finish and is located 8 feet from the plug.
4. This fixture has handmade elements and may exhibit variability within the same piece. These variations are inherent in the production process and are not to be considered as defects. We do our best to maintain a consistent product while honoring handmade craftsmanship.
5. Dimensions may vary within half an inch.
6. The LED lifetime is 50,000 hours.
7. The driver, (class 2 power unit) is included within the fixture.
8. This fixture is designed so the LED board can be replaced when it reaches its lifetime.


Updated

November 18, 2025


Verso Surface Mount, Small, Plug-in

Technical Drawings


Front View

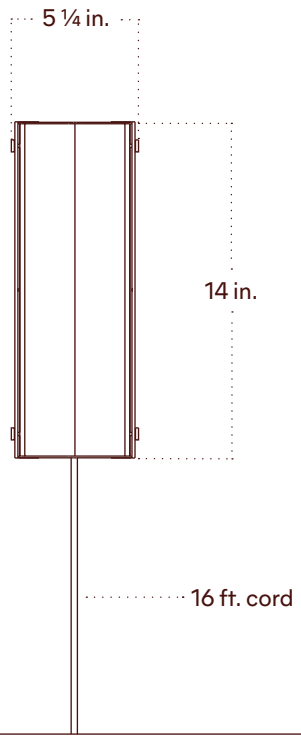


Side View



Top View



Inline Dimmer Switch Detail

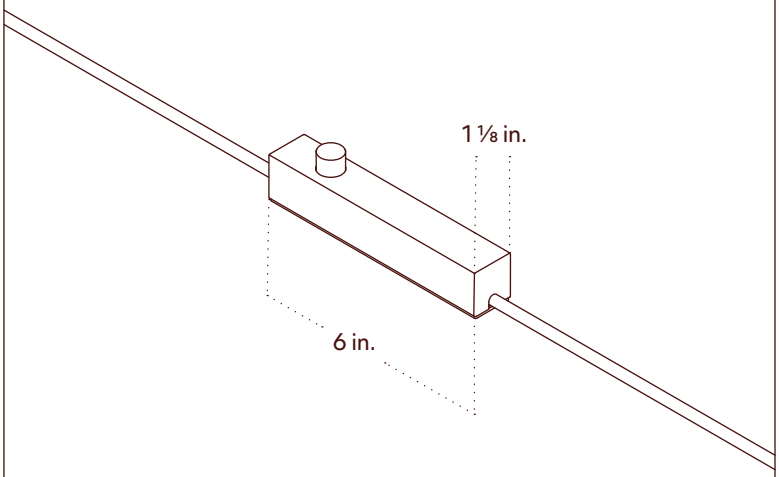

Verso Surface Mount, Medium



Technical Specifications

Materials	Glass, Brass–plated steel
Product weight	15 lbs
Lead time	12 weeks
Integrated LED	4,703 lm / 2700 K / 49.5 W / 92+ CRI
Input Voltage	120 V, 240 V or 277 V
Dimmer	TRIAC, ELV or 0–10 V
Certifications	cULus listed, cETLus listed, damp-rated, ADA compliant

Notes


1. This fixture can be installed on a wall or ceiling.
2. Designed for installation with a standard one-gang outlet box. Canopy mounting is located at the center of the fixture. Additional anchor holes are available for added support.
3. This fixture has handmade elements and may exhibit variability within the same piece. These variations are inherent in the production process and are not to be considered as defects. We do our best to maintain a consistent product while honoring handmade craftsmanship.
4. Dimensions may vary within half an inch.
5. The LED lifetime is 50,000 hours.
6. The driver, (class 2 power unit) is included within the fixture.
7. This fixture is designed so the LED board can be replaced when it reaches its lifetime.
8. This fixture meets the requirements of the Americans with Disabilities Act (ADA) of 1990.

Updated	November 18, 2025


Verso Surface Mount, Medium

Technical Drawings


Front View

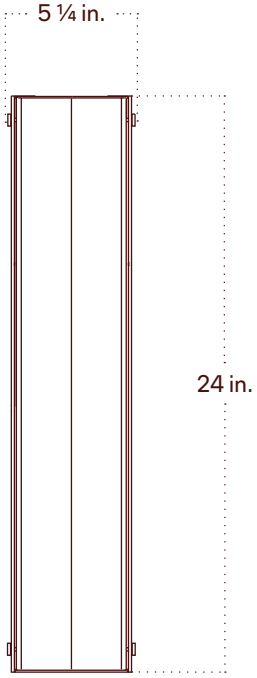


Side View



Top View



Isometric View



Verso Surface Mount, Medium, Plug-in



Technical Specifications

Materials	Glass, Brass–plated steel
Product weight	15 lbs
Lead time	12 weeks
Integrated LED	4,703 lm / 2700 K / 49.5 W / 92+ CRI
Input Voltage	120 V
Dimmer	Integrated dimmer switch
Certifications	cULus listed, cETLus listed

Notes


1. This fixture is installed vertically.
2. Designed for installation with a standard one-gang outlet box. Canopy mounting is located at the center of the fixture. Additional anchor holes are available for added support.
3. This fixture comes with a 16-foot chocolate brown fabric cord. The dimmer switch is our black painted metal finish and is located 8 feet from the plug.
4. This fixture has handmade elements and may exhibit variability within the same piece. These variations are inherent in the production process and are not to be considered as defects. We do our best to maintain a consistent product while honoring handmade craftsmanship.
5. Dimensions may vary within half an inch.
6. The LED lifetime is 50,000 hours.
7. The driver, (class 2 power unit) is included within the fixture.
8. This fixture is designed so the LED board can be

Updated November 18, 2025


Verso Surface Mount, Medium, Plug-in

Technical Drawings


Front View

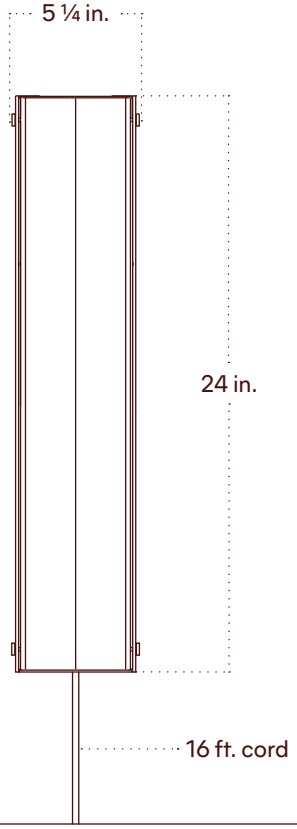


Side View



Top View




Inline Dimmer Switch Detail

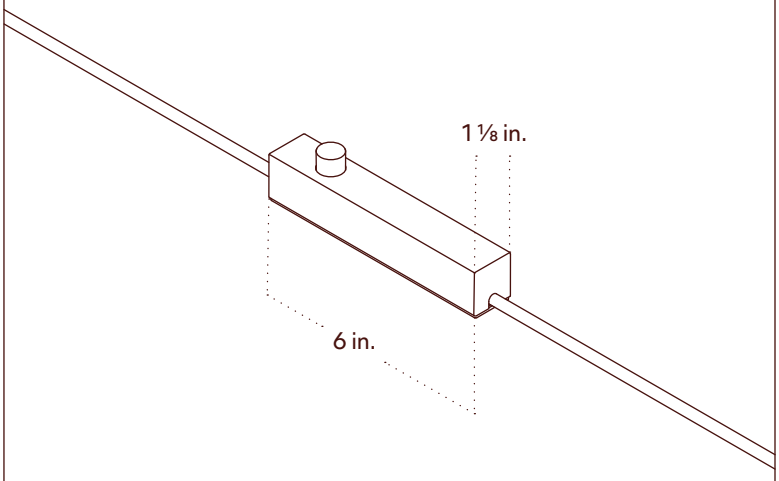


Glass Patterns


Front View




Solid



Powder



Stripe



Bi-directional Stripe


Finish Options

Brass, glass, and ceramic samples made or finished by hand may exhibit variability. Available for purchase at incommonwith.com/finishes.

Solid Glass


Almond


Olive


Pecan


Cherry

Powder Glass


Cirrus



Moss



Umber


Plum

Striped Glass


Vellum


Zinnia


Marigold


Garnet

Finish Options

Brass, glass, and ceramic samples made or finished by hand may exhibit variability. Available for purchase at incommonwith.com/finishes.

Brass



Brass



Patina Brass



Blackened Brass



Pewter