Elio Surface Mount

Assembly Guide



Thank you for choosing In Common With. Please confirm that you received all of the components pictured in this guide, and reach out to us if anything is missing. It's rare, but it happens. We hope you enjoy your fixture. With proper care, it should last a lifetime.


Have questions? Please contact us at support@incommonwith.com.




CAUTION!
Electrical shock risk. Turn off electrical power at the main fuse box or circuit panel before beginning installation, servicing the light, or installing accessories. We recommend working with a qualified electrician familiar with the type of work you'd like done.

ATTENTION!
Risque de choc électrique. Coupez l'alimentation électrique au niveau de la boîte à fusibles principale ou du panneau de circuits avant de commencer l'installation, l'entretien de la lumière ou l'installation d'accessoires. Nous vous recommandons de travailler avec un électricien qualifié familier avec le type de travail que vous souhaitez effectuer.


Elio Surface Mount, Small
Components



Elio Small Assembly




Backplate



Canopy Set Screws (3)




Dimmable LED Driver




Hardware Pack

Step 1

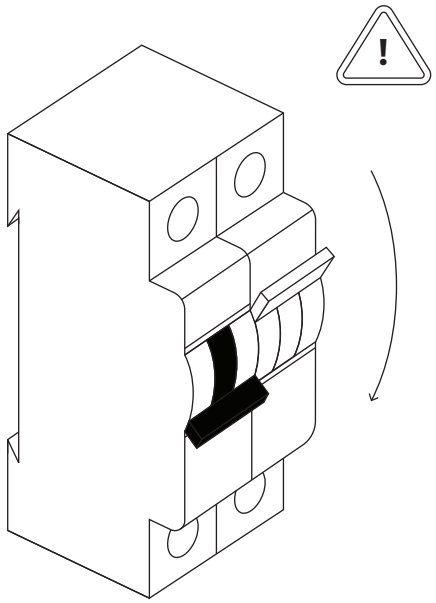

Before beginning installation, turn off electrical power at the main fuse box or circuit panel.

Step 2

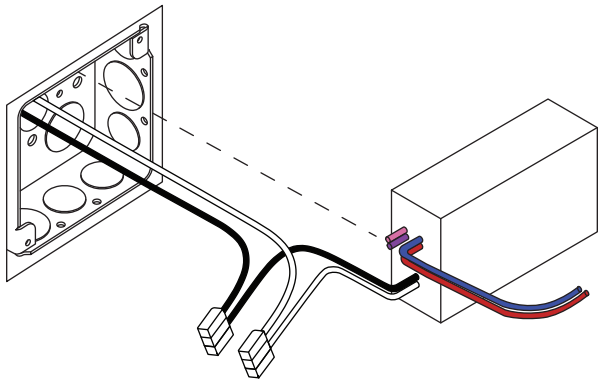


Use only with Class 2 Power Unit with output DC24V constant voltage.
Connect the junction box wires to the Class 2 Power Unit with Wago clips:

White → Neutral
Black → Live

For 0-10V Dimming: Connect pink and purple wires to the same colors dimming system. For TRIAC or ELV Dimming: Cap the pink and purple wires with Wago clips. If needed, strip 3/8” of insulation from each wire before connecting.


If you are using a remote driver, move on to step 4..

Step 3

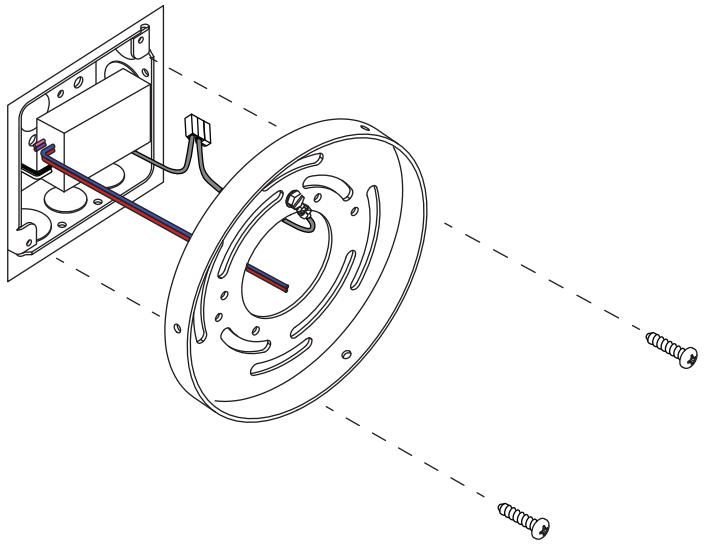

Ensure easy access to the blue and red wires by feeding them through the central opening in the Backplate. Use a wago clip to connect the Green/Yellow grounding wire from the Backplate to the corresponding grounding wire from the junction box. Mount the Backplate to the junction box using a Phillips head screwdriver to tighten the mounting screws.

Step 4

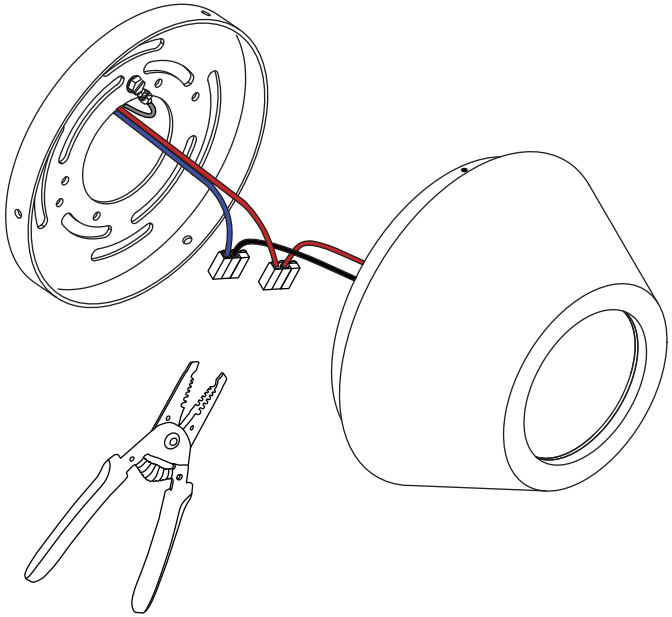


Use Wago clips to connect the Class 2 Power Unit wires to the fixture:

Blue/Black ⇒ Neutral
Red ⇒ Live
Green/Yellow ⇒ Ground


If needed, strip 3/8” of insulation from each wire before connecting.

Step 5

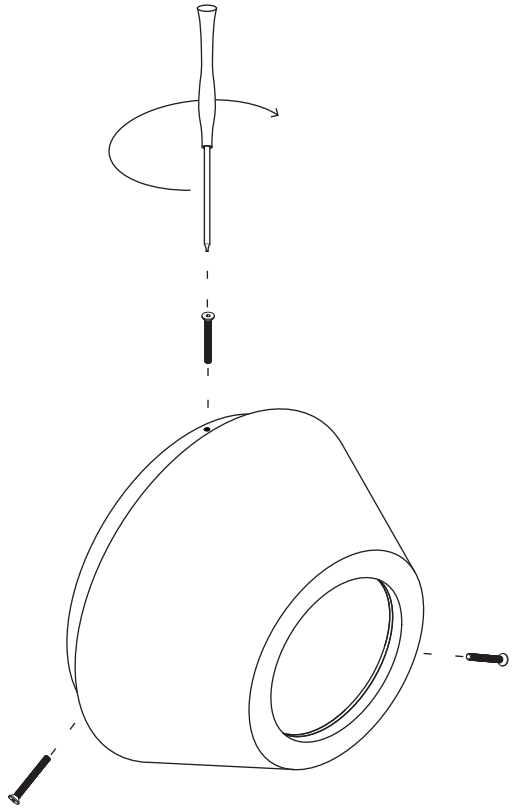


Align the holes of the backplate with the holes of the canopy cover. Secure the canopy cover in place with the canopy screws and screwdriver found in the hardware pack.

Step 6

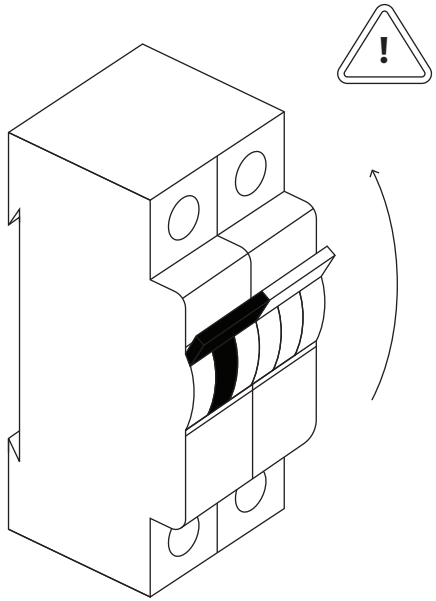


Turn the power back on at the main fuse box or circuit panel you disabled before installation. Turn on the light :)

Elio Surface Mount, Medium
Components

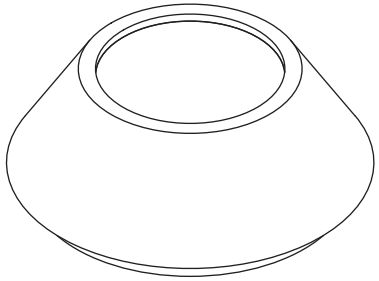


Elio Medium Assembly



Backplate




Canopy Screws (3)




Hardware Pack


Elio Surface Mount, Large
Components

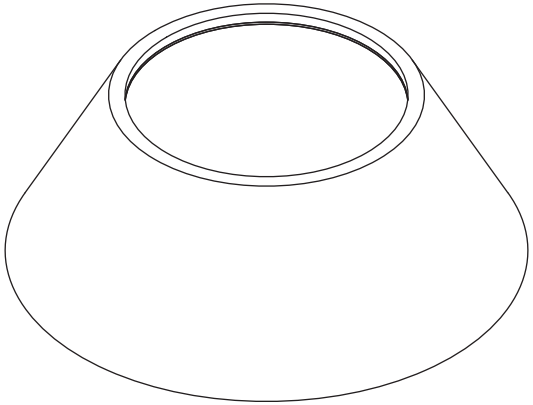


Elio Large Assembly

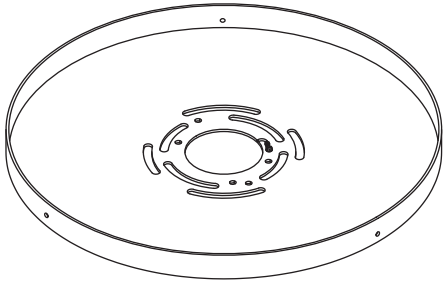

Backplate




Canopy Set Screws (3)




Hardware Pack

Step 1

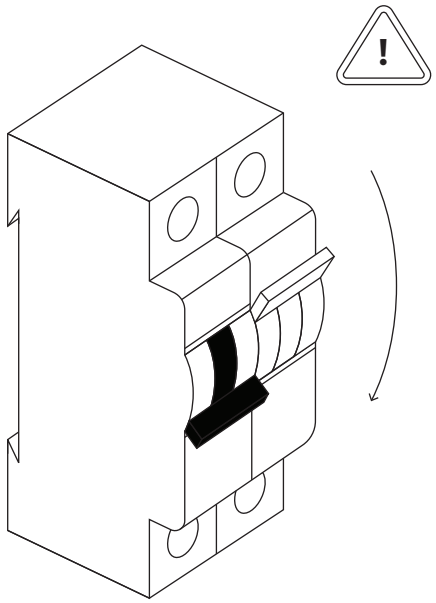


Before beginning installation, turn off electrical power at the main fuse box or circuit panel.

Step 2

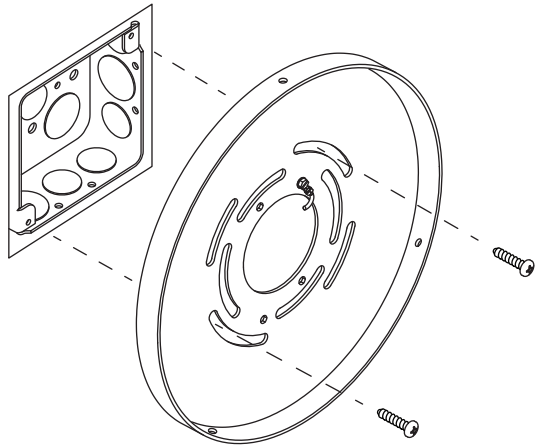

Mount the backplate to the junction box using a Phillips head screwdriver to tighten the mounting screws.

Step 3

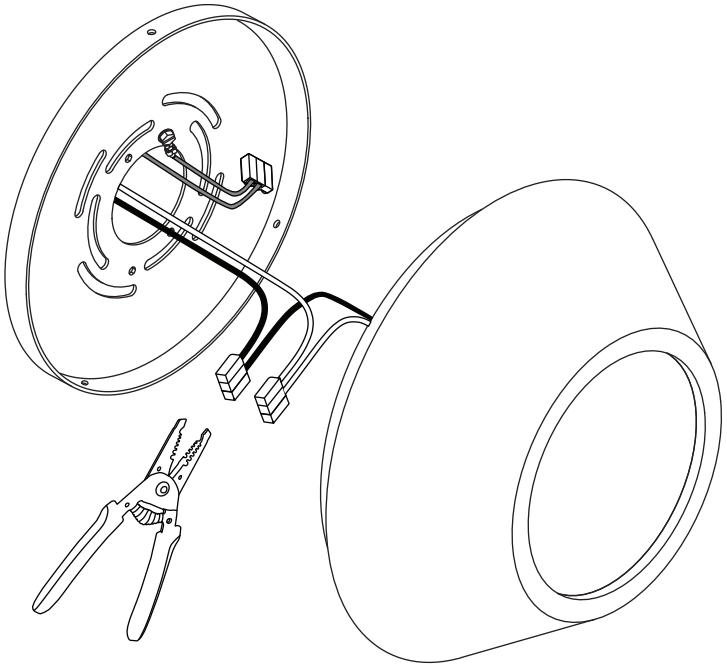


Use only with Class 2 Power Unit with output DC24V constant voltage.
Connect the junction box wires to the Class 2 Power Unit with Wago clips:

White → Neutral
Black → Live


For 0-10V Dimming: Connect pink and purple wires to the same colors dimming system. For TRIAC or ELV Dimming: Cap the pink and purple wires with Wago clips. If needed, strip 3/8” of insulation from each wire before connecting.

Step 4

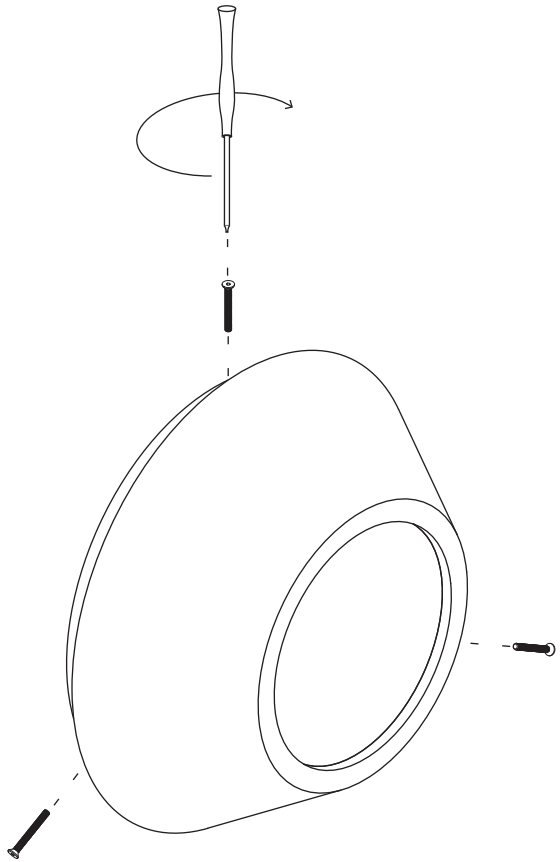


Align the holes of the backplate with the holes of the canopy cover. Secure the canopy cover in place with the canopy screws and screwdriver found in the hardware pack.

Step 5

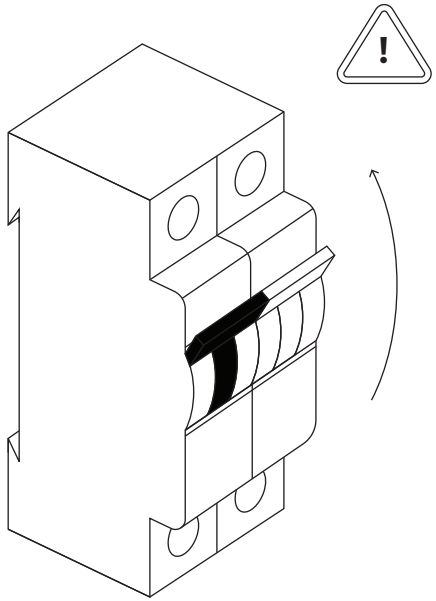


Turn the power back on at the main fuse box or circuit panel you disabled before installation. Turn on the light :)

Elio Surface Mount, Medium, Plug-in
Components

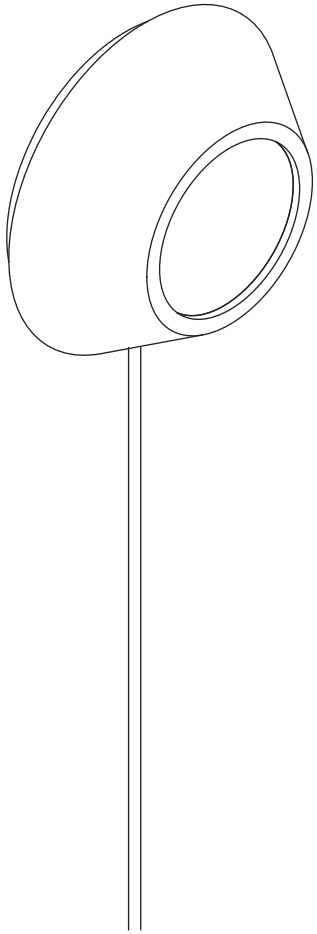

Elio Medium Plug-in Assembly




Backplate




Canopy Screws (2)

Screwdriver

Elio Surface Mount, Large, Plug-in
Components

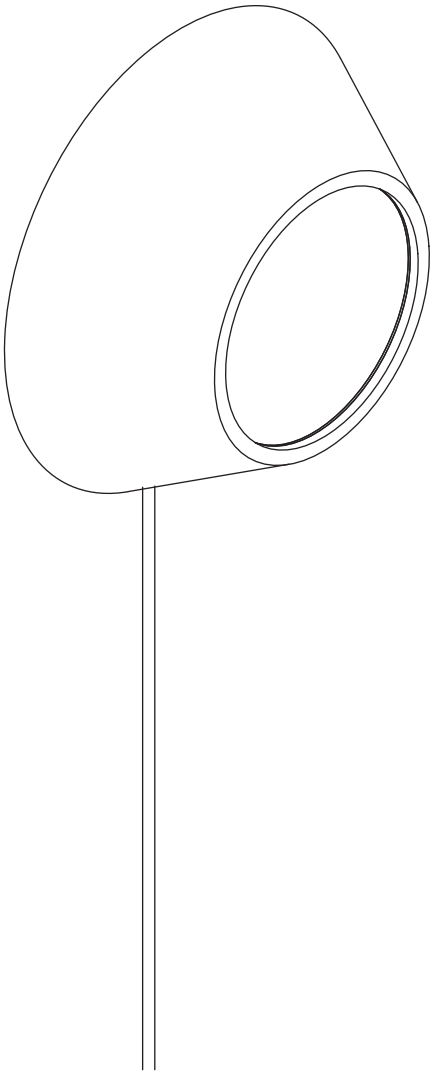

Elio Large Plug-in Assembly

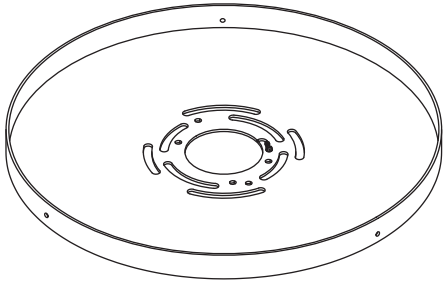


Backplate



Canopy Set Screws (2)


Screwdriver

Step 1

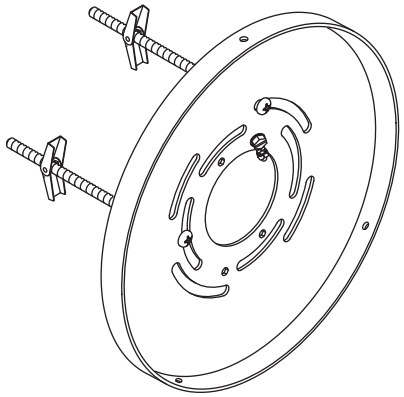


Mount the Backplate to the wall using anchors appropriate for your wall material (not provided). Consult a qualified professional if needed.

Step 2

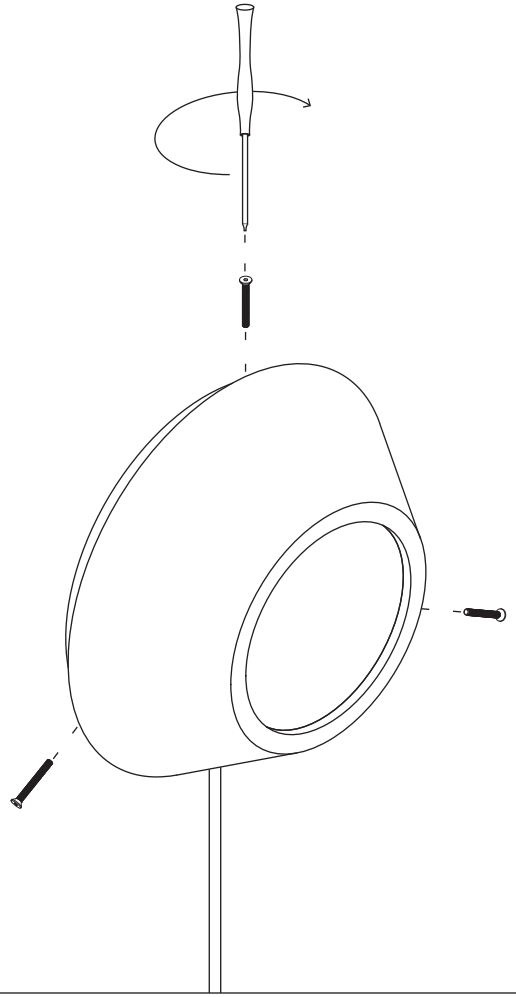


Align the holes of the backplate with the holes of the canopy cover. Secure the canopy cover in place with the canopy screws and screwdriver found in the hardware pack.

Step 3

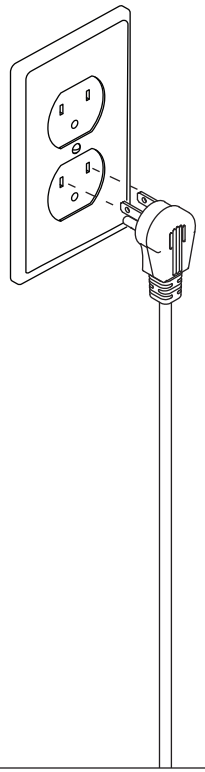

Plug in the cord.

Step 4

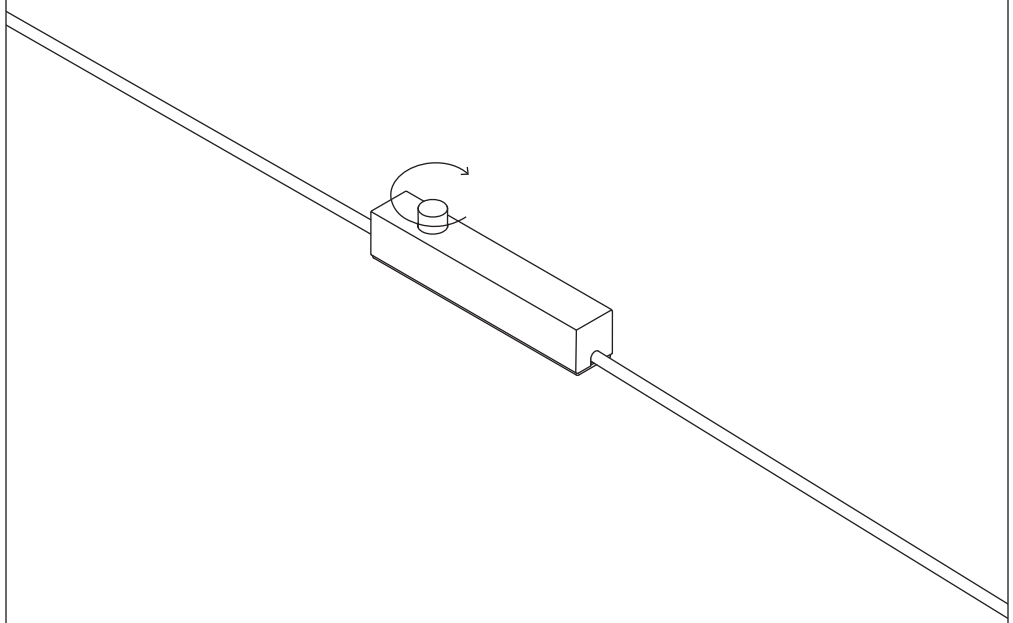

Turn on and dim the light as desired using the inline dimmer located at the middle of the cord.

Never use scouring pads or abrasive cleaning solutions. If it comes in a bottle, it is bad for your fixture. Instead, we recommend using soft microfiber cloths, which are gentler on our products and the planet.

For Metal: Wipe with a damp or dry microfiber cloth. Please note that our brass is unlaquered, and will darken naturally over time.

For Glass: Wipe clear or colored glass with a damp microfiber cloth. For sandblasted or etched glass, use a dry microfiber cloth. Removable glass shades can be washed carefully in a sink using warm or hot water.

For Ceramic: Wipe with a damp microfiber cloth. Do not submerge in water.